


P. C. B LAYOUT
TOP VIEW

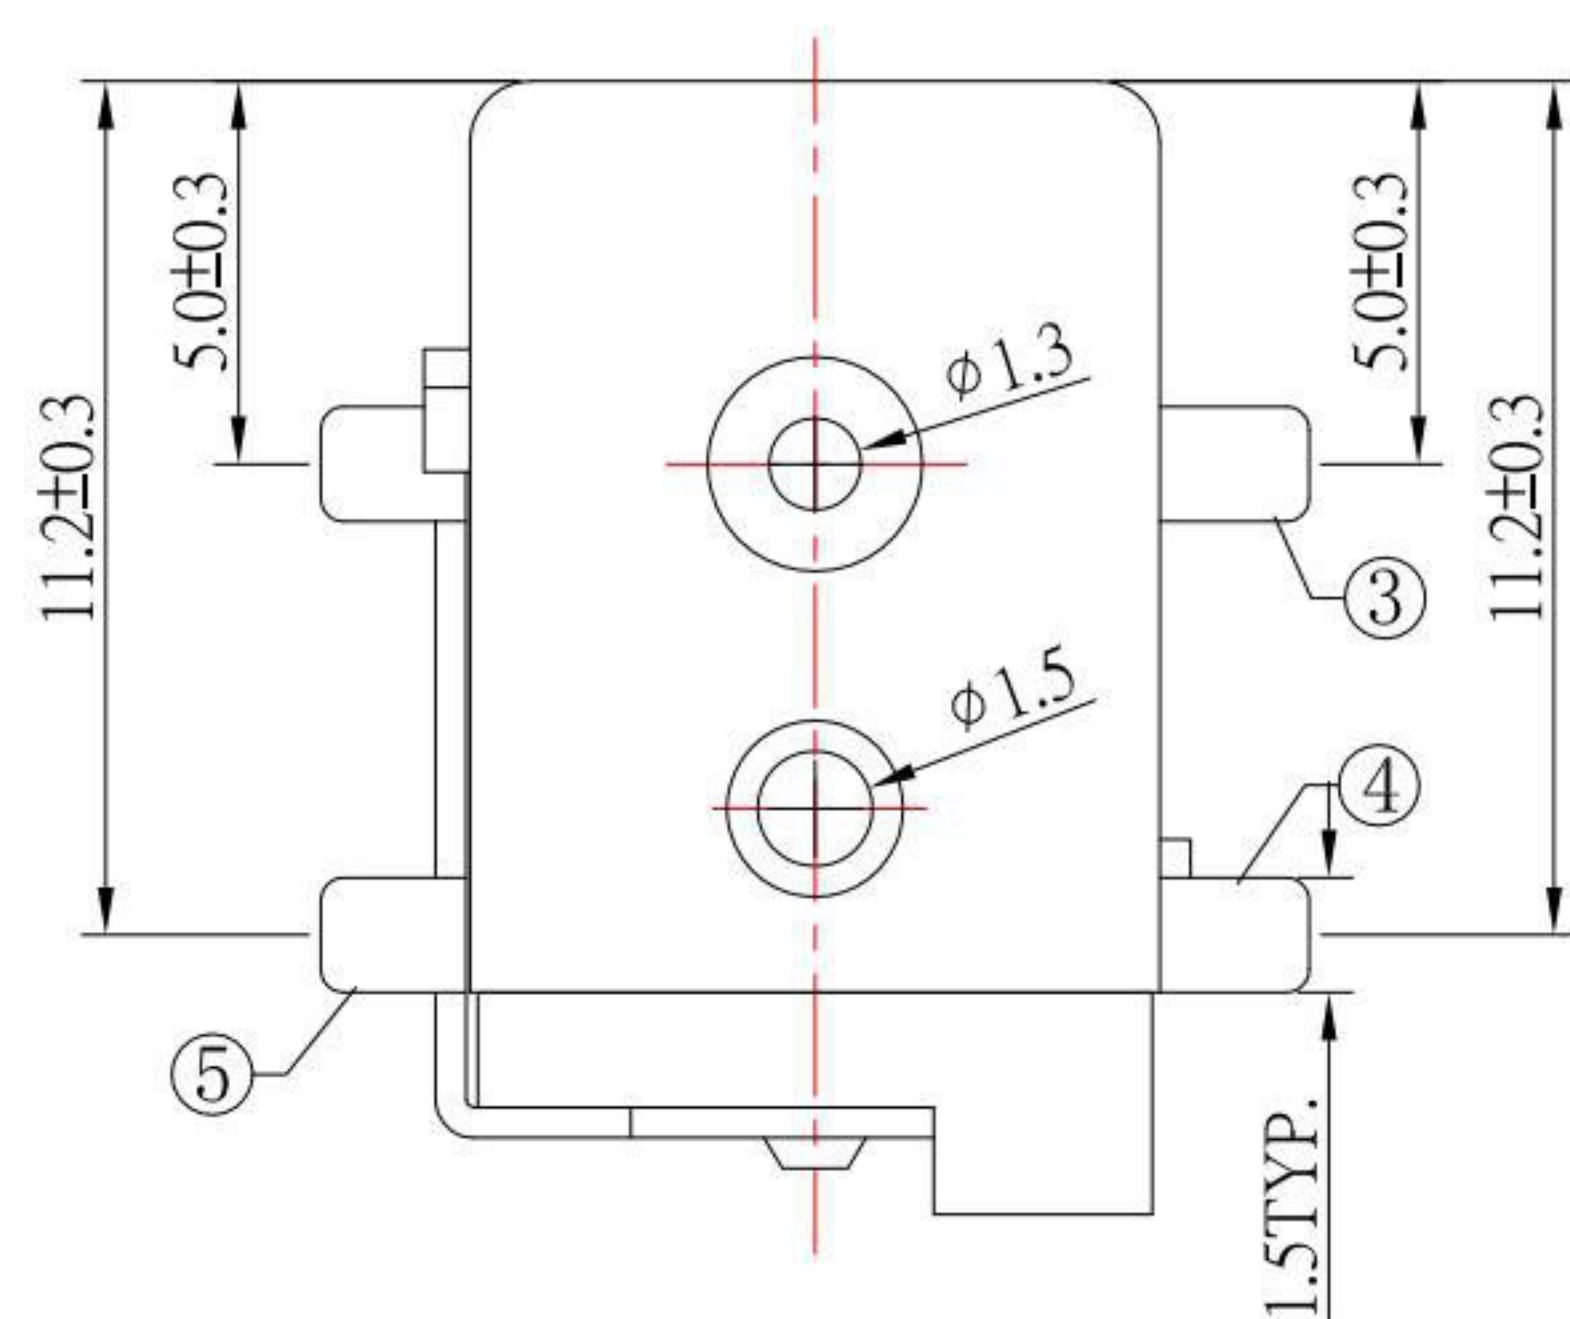

MODEL NO.	DC-016B-x
SCHEMATIC	
CENTER PIN	φ2.0mm
	φ2.5mm

SPECIFICATION

1. Rating : DC 30V, 2.0A (12V, 5.0A) ;
2. Contact resistance : ≤ 30mΩ ;
3. Insulation resistance : ≥ 100MΩ ;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-20N
6. life test : 5,000 cycles °

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
6	PIN	1	BRASS	Ni-Plating
5	FLAT FOOT	1	BRASS	Ag-Plating
4	CURVE PIECE	1	BRASS	Ag-Plating
3	SPRING PIECE	1	BRONZE	Ag-Plating
2	COVER	1	PA9T	
1	HOUSING	1	PA9T	

KSD 科斯达电子科技有限公司
SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD
全球 互聯零組件製造企業

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	07/09/20			
CHECKED BY:	DATE	FINISH	MODLE	DC JACK 小柱
Jacky Chen	07/09/20			
APPROVED BY:	DATE	SCALE	DWG NO.	DC-016B-x-S124
Tony Kao	07/09/20	1 : 1		
		SHEET NO.	PART NO.	DC-016B-x-S124
		1 of 1		

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	更新尺寸及樣式	Jack	070920
1	新增尺寸	Jack	062320