


SPECIFICATION

- 1. Rating : DC 30V 0.5A
- 2. Contact resistance : $\leq 50m\Omega$ Max
- 3. Insulation resistance : $\geq 100M\Omega$ Min
- 4. Withstand voltage : 500VAC
- 5. Insertion and extraction force : 3-30N
- 6. life test : 5,000 cycles

SCHMATIC

DC-067DS-1.0

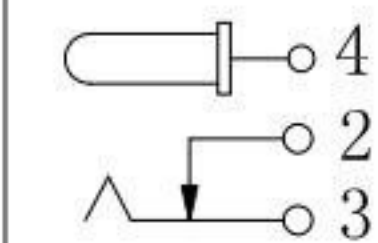


P.C.B LAYOUT TOP VIEW

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
5	CONTACT FOOT	1	BRASS	Ag-Plating
4	PIN	1	BRASS	Ag-Plating
3	SPRING	1	SUS301	Ag-Plating
2	CURVE PIECE	1	BRASS	Ag-Plating
1	HOUSING	1	LCP	

KSD 科斯达电子科技有限公司
 SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD
 全球 互联零组件制造企业

TOLERANCE UNLESS OTHERWISE STATED:
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
 CHECKED BY: Jacky Chen
 APPROVED BY: Tony Kao

DATE: 12/09/14
 DATE: 12/09/14
 DATE: 12/09/14

MAT'L	TITLE	JACK
FINISH	MODLE	DC JACK
SCALE: 1:1	DWG NO.	DC-067DS-1.0-HF-S125
SHEET NO. 1 of 1	PART NO.	DC-067DS-1.0-HF-S125

SIZE: A4
 VER: R

ITEM NO.	DESCRIPTION	DRAWN	DATE