


□: TERMINAL NO.

Model NO.	DC-074S
Schematic	
CENTER PIN	ø1.65 mm ø2.00 mm ø2.50 mm

DC-074S-x-S141
Center pin

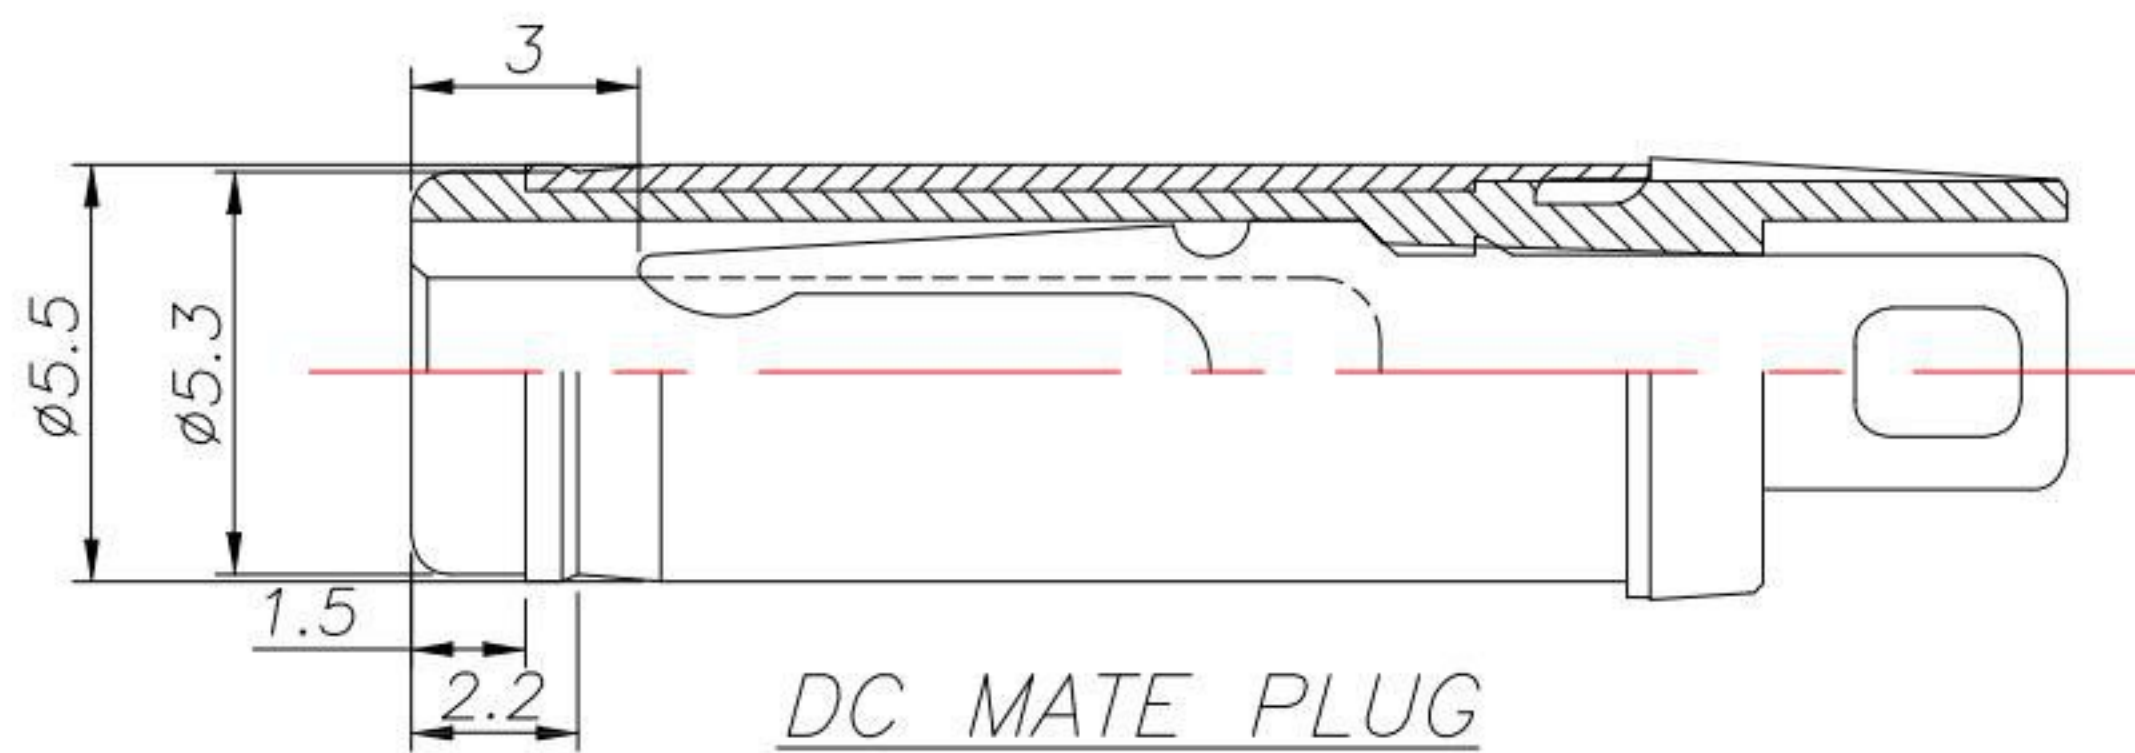

SPECIFICATION

1. Rating : DC 25V 3.0A;
2. Contact resistance : $\leq 30m\Omega$;
3. Insulation resistance : $\geq 100M\Omega$ (DC500V);
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-30N
6. life test : 5,000 cycles.

NO.	DESCRIPTION	QTY	MATERIAL	REMARK
⑦	Ground shield	1	Brass	Nickel plating
⑥	Tip spring-2	1	Phosphor Bronze	Silver plating
⑤	Shunt terminal	1	Brass	Silver plating
④	Tip spring-1	1	Phosphor bronze	Silver plating
③	Center pin terminal	1	Brass	Silver plating
②	Center pin	1	Copper alloy	Nickel plating
①	Housing	1	PBT	Black

KSD 科斯达电子科技有限公司
SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD
全球 互联零组件制造企业

TOLERANCE UNLESS OTHERWISE STATED:	Up to 5 ±0.2	Above 5 ~ 15 ±0.3	Above 15 ~ 30 ±0.4	Above 30 ~ 50 ±0.5	Angle ±0.3
	3RD. ANGEL'S				
	UNITS	MM			

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	05/07/15			
CHECKED BY:	DATE	FINISH	MODLE	DC JACK
Jacky Chen	05/07/15			
APPROVED BY:	DATE	SCALE	DWG NO.	DC-074S-x-S141
Tony Kao	05/07/15	1:1		
		SHEET NO.	PART NO.	DC-074S-x-S141
		1 of 1		
			SIZE	A4
			VER	R1

1	更新材質	Jack	050715
ITEM NO.	DESCRIPTION	DRAWN	DATE