



PRODUCT IMAGE

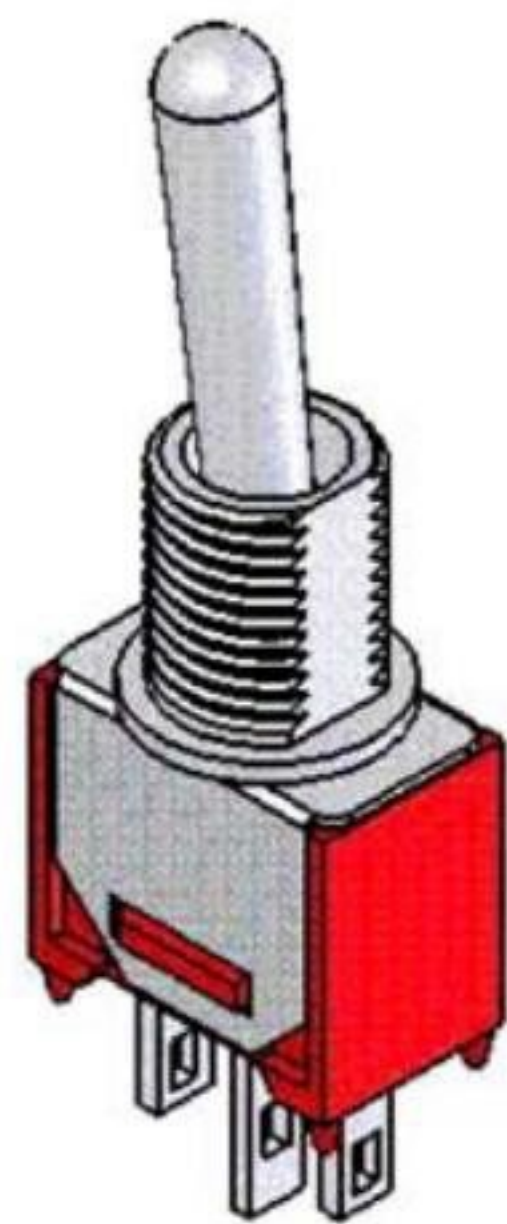

SCHEMATIC

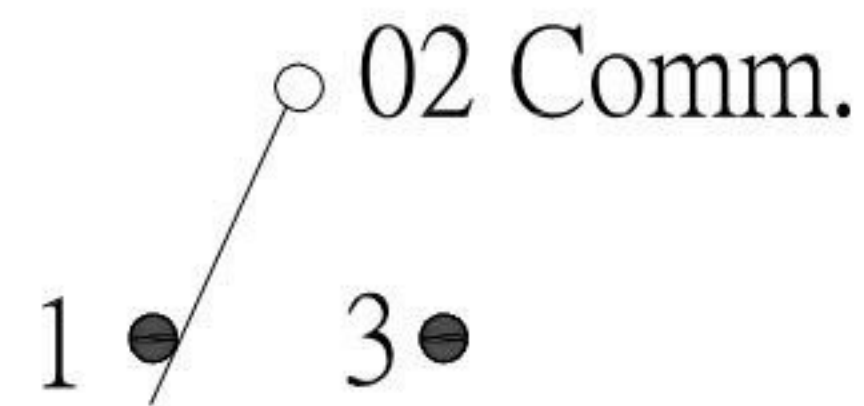

SPECIFICATIONS:

CONTACT RATING : 3 AMPS @ 120 V AC or 28 V DC.
 1.5 AMPS @ 250 V AC or 0.4 AMPS@20V AC OR DC
 ELECTRICAL LIFE : 30,000 make-and-break cycles at full load.
 CONTACT RESISTANCE : 20 mΩ max. initial @ 2-4 VDC
 100 mA , for both coin silver and gold plated contacts.
 INSULATION RESISTANCE : 1,000 MΩ min
 DIELECTRIC STRENGTH : 1,000 V RAM @ sea level.
 OPERATING TEMPERTURE : -30°C to 130°C

MTAERIALS:


CASE : Dially phthalate (DAP)
 BUSHING : Brass , nickel plated.
 HOUSING : Stainless steel.
 TERMINAL/CONTACT : Brass , silver plated.
 SWITCH SUPPORT : Brass , Tin plated.

Model No.	Switcing Position		
	ON	NONE	OFF
DS-40T1B1A1	ON	NONE	OFF
DS-41T1B1A1	ON	NONE	ON
DS-42T1B1A1	ON	OFF	ON
DS-43T1B1A1	ON	NONE	(ON)
Term Comm.	2- 3	OPEN	2- 1

KSD 科斯达电子科技有限公司
 SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD
 全球 互聯零組件製造企業

TOLERANCE UNLESS OTHERWISE STATED :
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3°

3RD. ANGEL'S



UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	10/27/21		MODLE	Toggle SWITCH
CHECKED BY:	DATE	FINISH	DWG NO.	DS-4xT1B1A1
Jacky Chen	10/27/21		PART NO.	DS-4xT1B1A1
APPROVED BY:	DATE	SCALE	1 : 1	
Tony Kao	10/27/21	SHEET NO.	1 of 1	

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	材質更新	Jack	102721

SIZE A4
 VER R1