


P.C.B LAYOUT

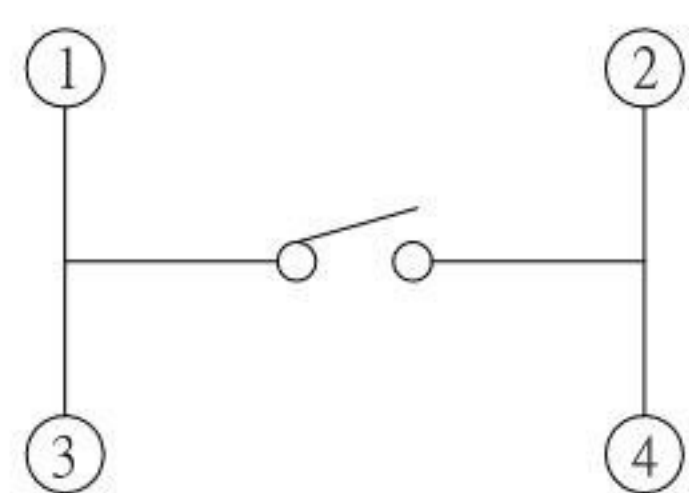

CIRCUIT DIAGRAM

SPECIFICATIONS


Rating	DC 12V 0.1A
Contact Resistance	100mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±20gf
Life	100,000 cycles

NO.	PARTS	MATERIALS	Q'TY	FINISH
E	THERMINAL	PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	PA46	1	BLACK
B	CASE	PA46	1	BLACK
A	KNOB	PA46	1	BLACK

KSD 科斯达电子科技有限公司
 SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD
 全球 互联零组件制造企业

TOLERANCE UNLESS OTHERWISE STATED:
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	09/26/13		MODLE	DETECTOR SWITCH
CHECKED BY:	DATE	FINISH	SCALE	1 : 1
Jacky Chen	09/26/13		DWG NO.	DS-A30L1-S246
APPROVED BY:	DATE	SHEET NO.	PART NO.	DS-A30L1-S246
Tony Kao	09/26/13	1 of 1		

SIZE A4
VER R

ITEM NO.	DESCRIPTION	DRAWN	DATE