


P.C.B LAYOUT

SPECIFICATIONS

Rating	DC 12V, 0.1A.
Contact Resistance	100mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	40±10 gf
Mechanical Life	100,000 cycles

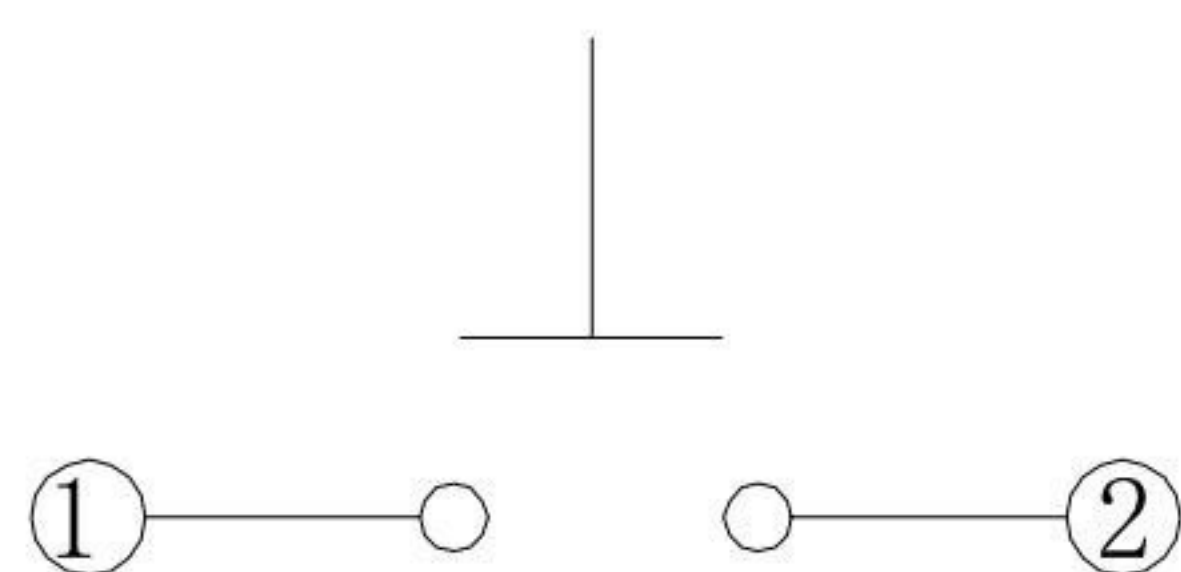


CIRCUIT DIAGRAM

NO	NAME	MATERIAL	QTY	FINISHING
4	TERMINAL	BRASS	4	Ag PLATED
3	SPRING	SUS	1	Ag PLATED
2	CASE	PA66	1	BLACK
1	KNOB	PA66	1	BLACK

KSD 科斯达电子科技有限公司
 SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD
 全球 互联零组件制造企业

TOLERANCE UNLESS OTHERWISE STATED:
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3

3RD. ANGEL'S



UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	01/07/20	FINISH	MODLE	DETECTOR SWITCH
CHECKED BY:	DATE	SCALE	DWG NO.	DS-A50-GND-S379
Jacky Chen	01/07/20	1:1	PART NO.	DS-A50-GND-S379
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	01/07/20			

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新料號	Jack	010720

SIZE A4
VER R1