


P.C.B LAYOUT

SPECIFICATIONS

Rating	DC 12V, 0.1A.
Contact Resistance	100mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	40±15 gf
Mechanical Life	50,000 cycles

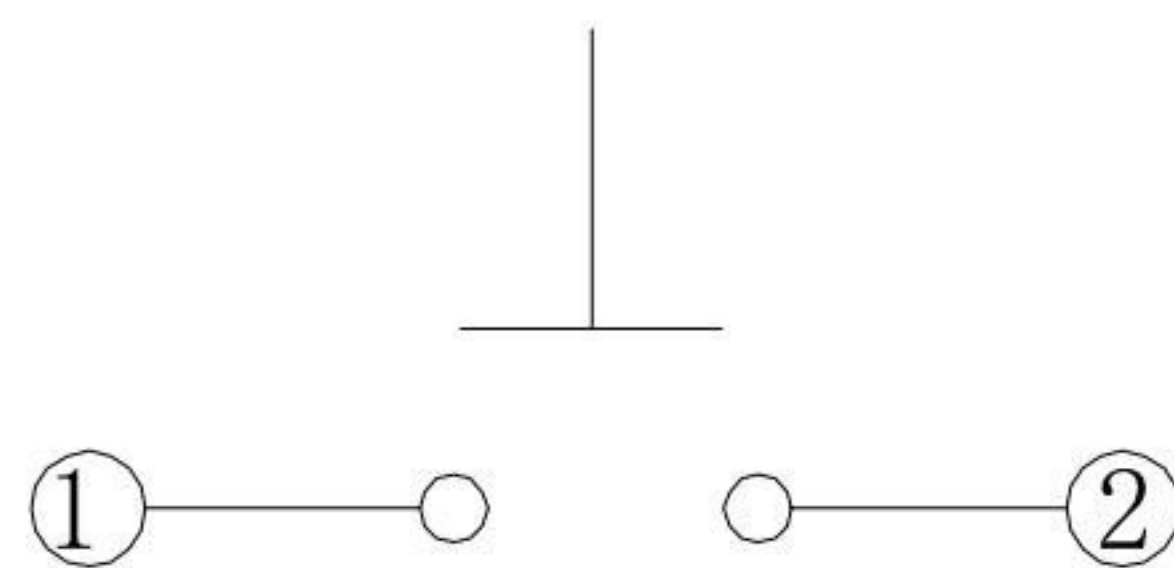

CIRCUIT DIAGRAM

5	COVER	SUS	1	
4	CONTACT	BECU	1	Ag PLATED
3	TERMINAL	PBS	2	Ag PLATED
2	BASE	PA66	1	BLACK
1	KNOB	PA66	1	BLACK
NO	NAME	MATERIAL	QTY	FINISHING

KSD 科斯达电子科技有限公司
 SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD
 全球 互 联 零 组 件 制 造 企 业

TOLERANCE UNLESS OTHERWISE STATED:
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	01/07/20			
CHECKED BY:	DATE	FINISH	MODLE	DETECTOR SWITCH
Jacky Chen	01/07/20			
APPROVED BY:	DATE	SCALE	DWG NO.	DS-A60-GND-S379
Tony Kao	01/07/20	1:1		
SHEET NO.	1 of 1	PART NO.	DS-A60-GND-S379	

ITEM NO.	DESCRIPTION	DRAWN	DATE

SIZE A4
VER R