







# FH-A11-x2xxx-S304

Insulator Material: 

0 : PBT
3 : PA6T

 PIN數

	L1	L2
A	8.5	3.2
B	5.7	3.0
C	8.5	2.8
D	5.0	2.8

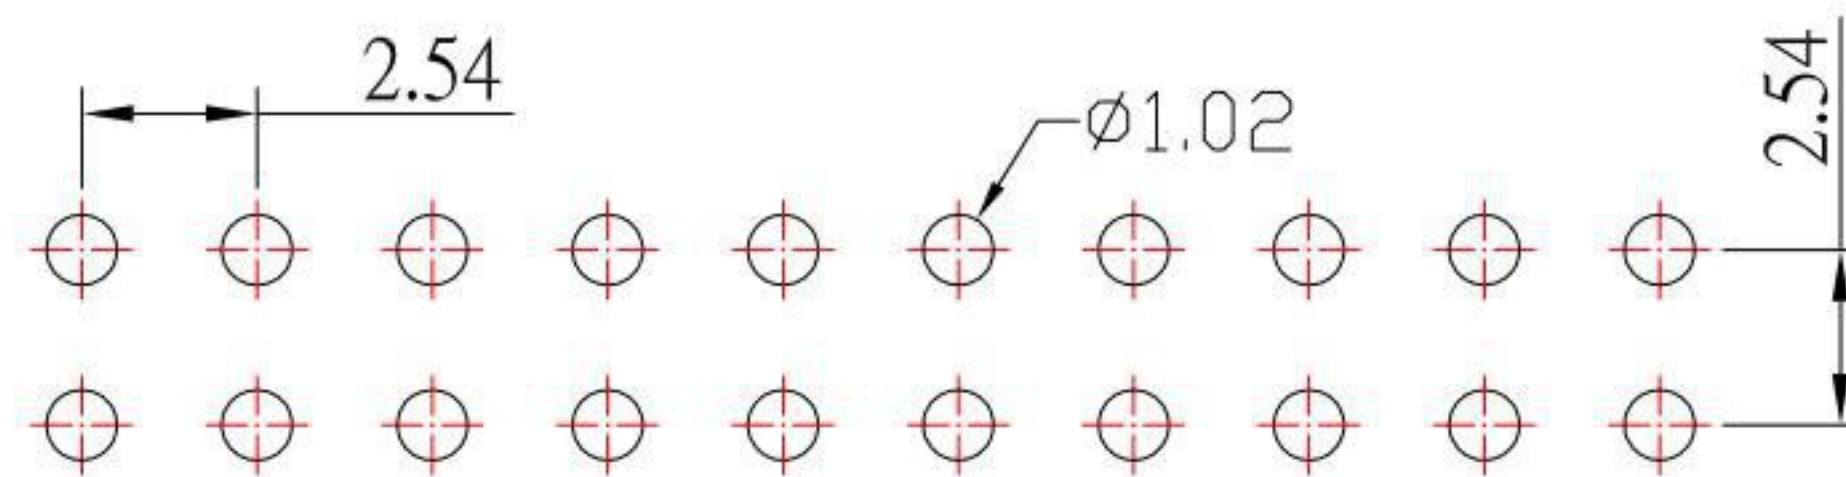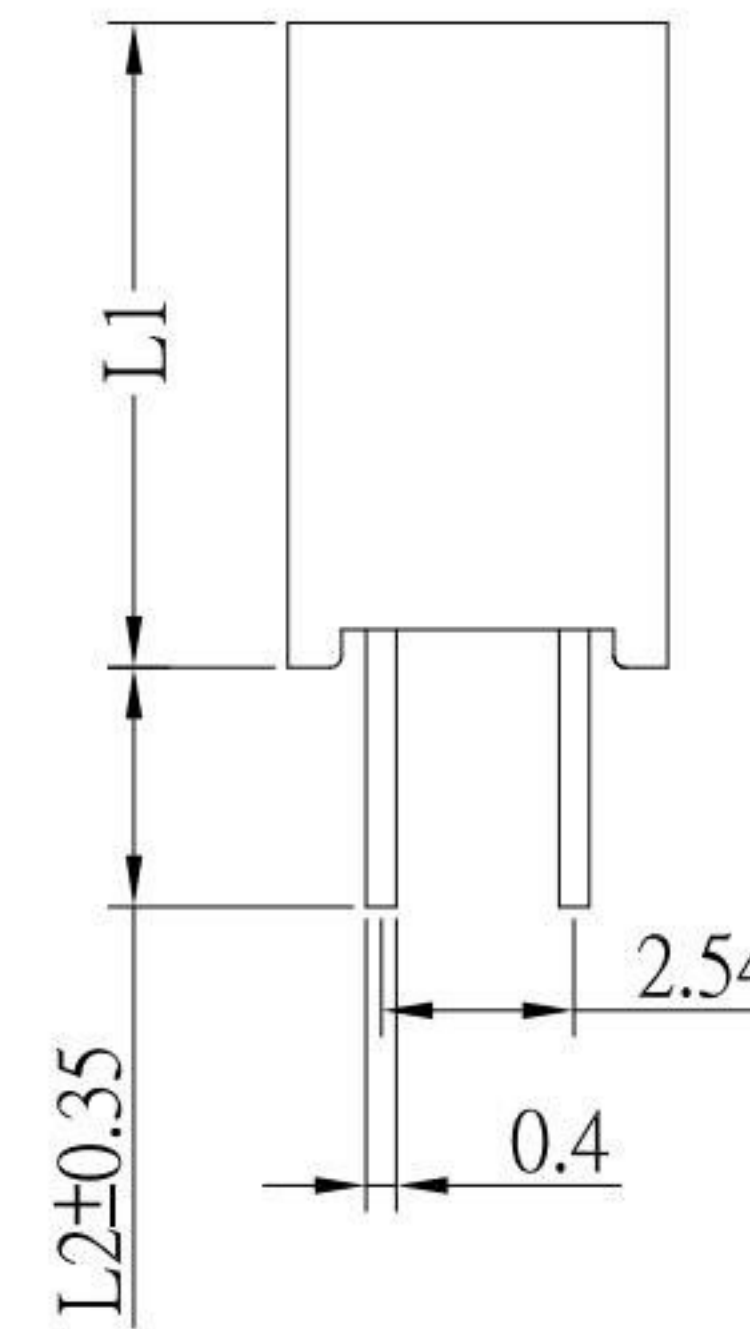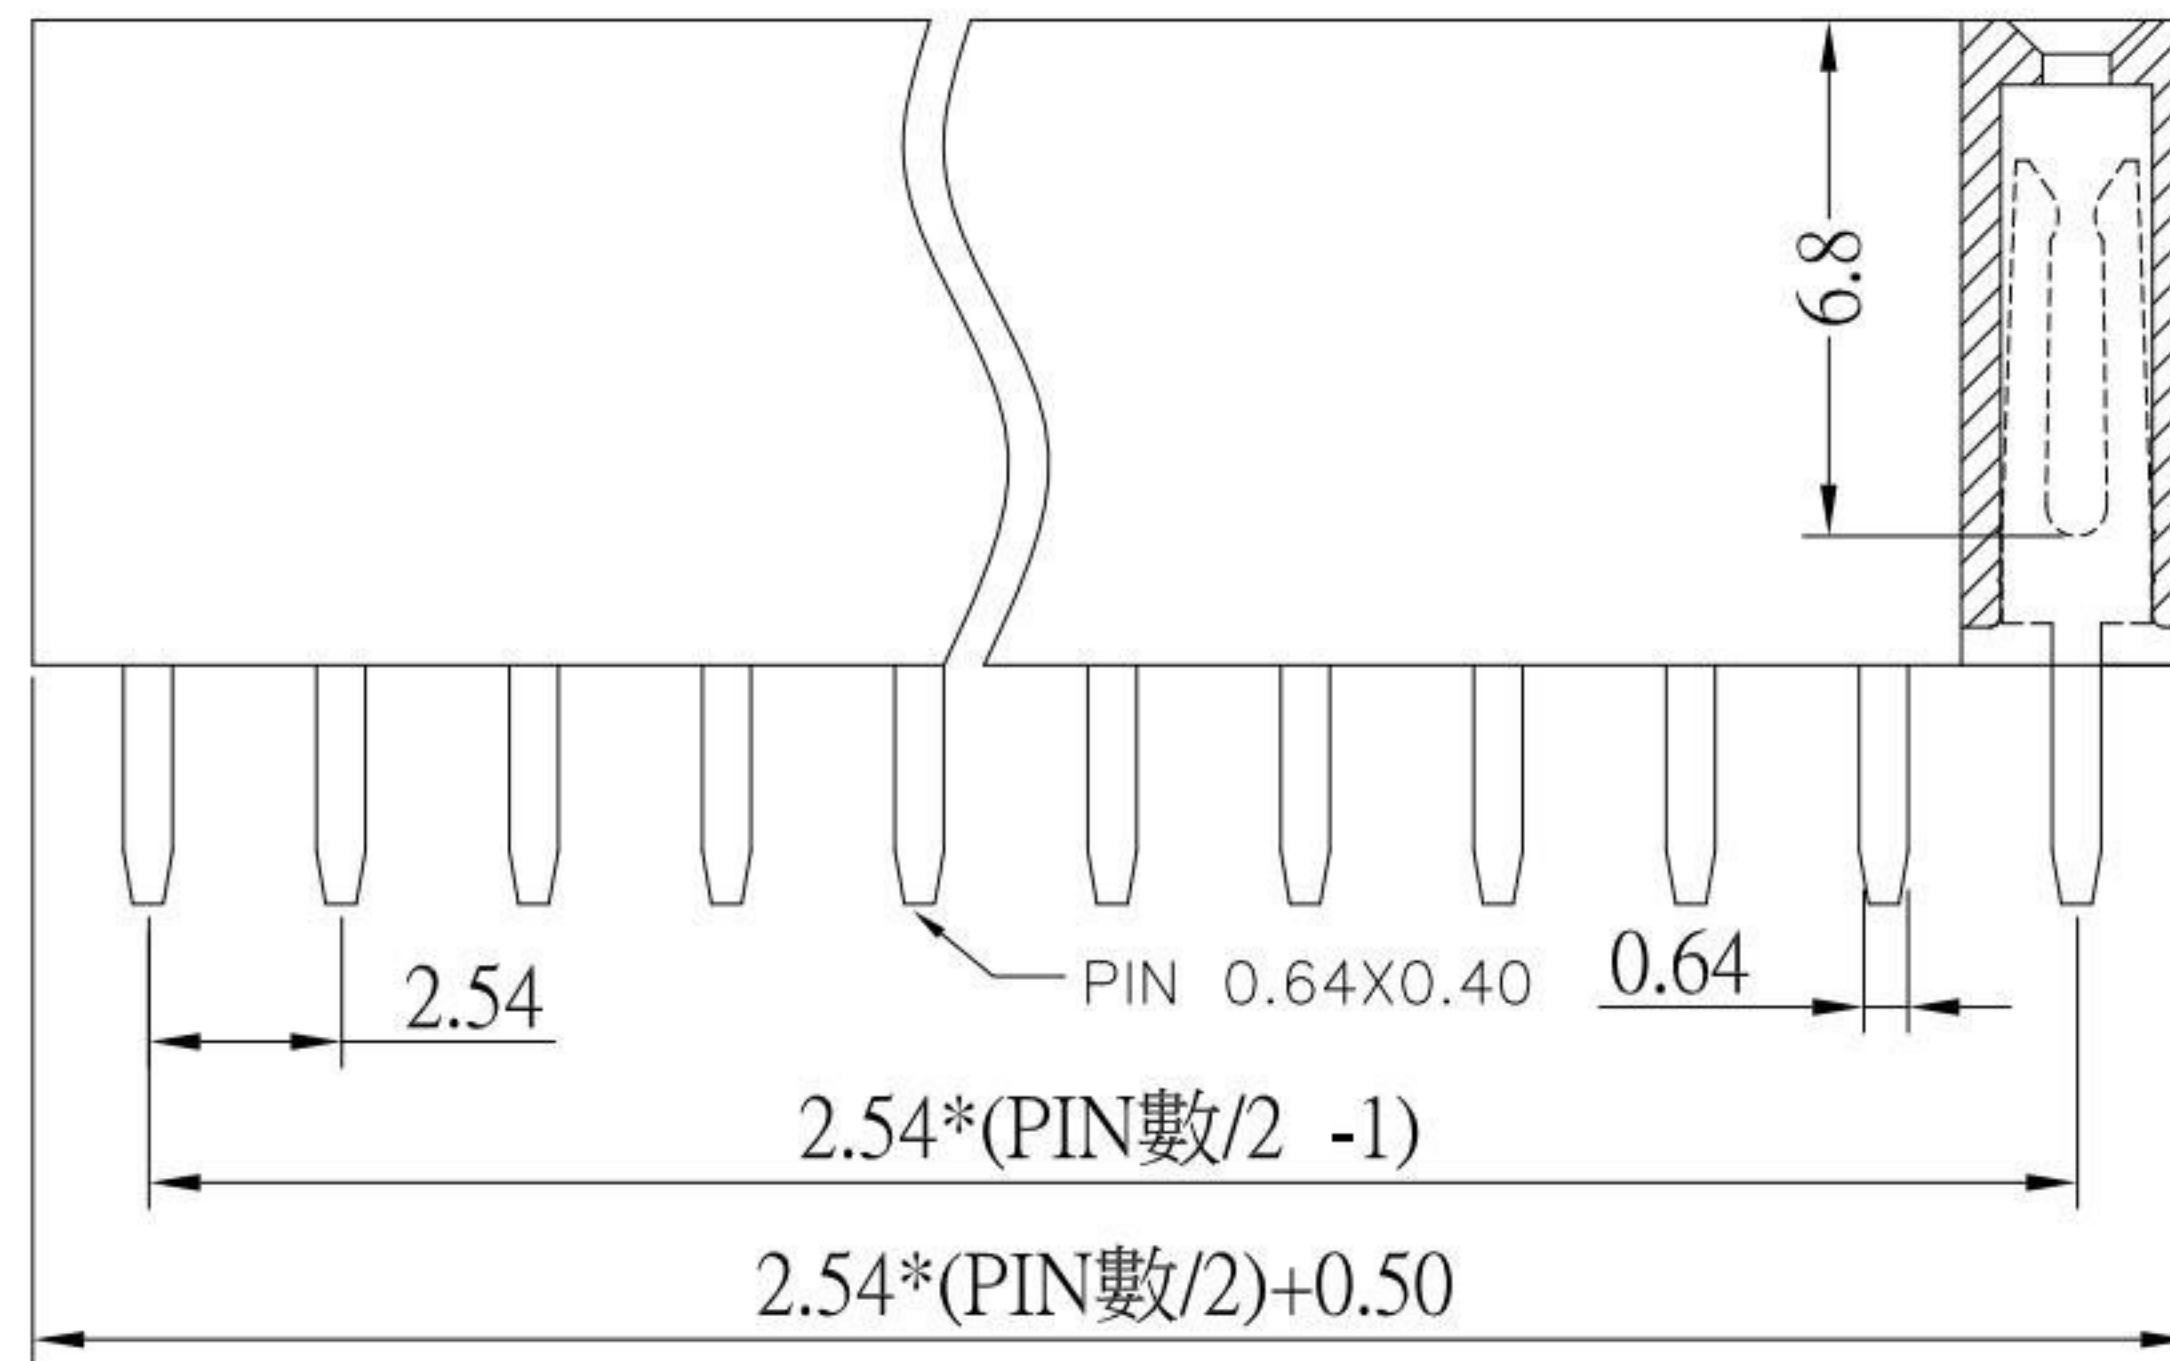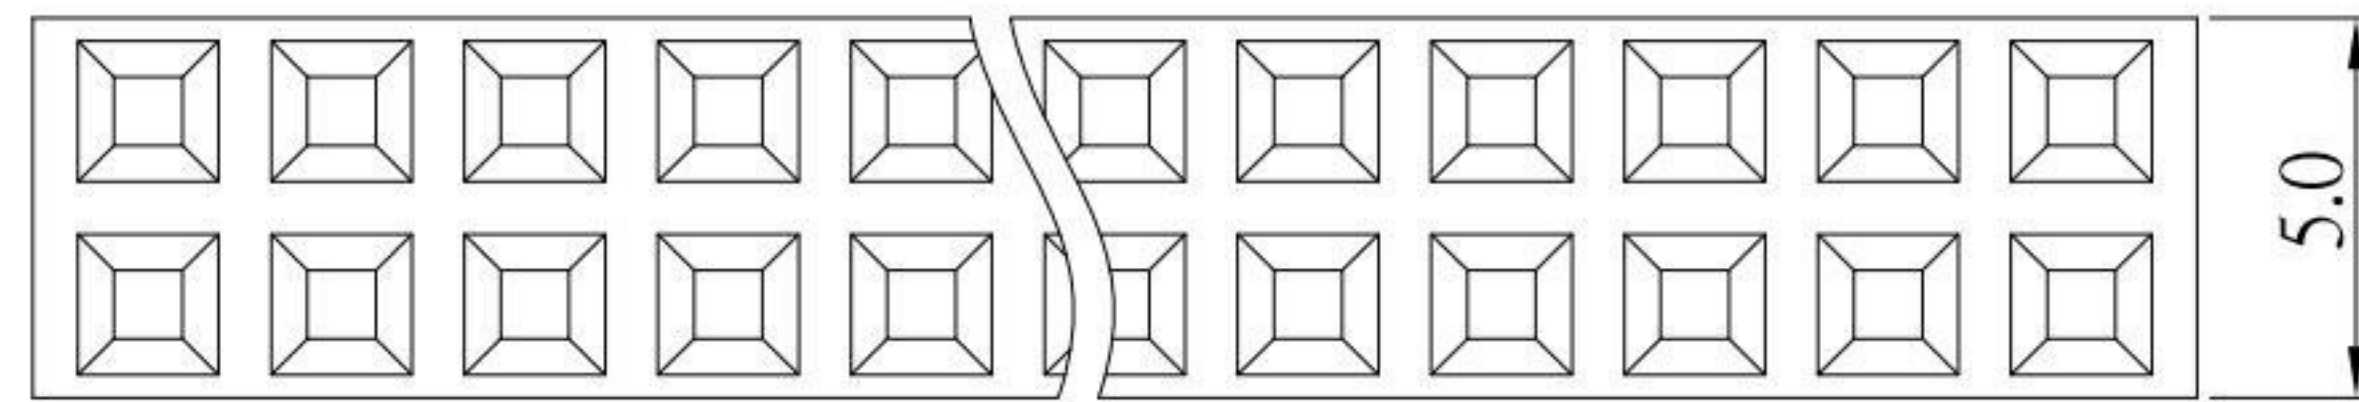

## P. C. B. LaYout

### SPECIFICATIONS:

- 1.Current Rating : 3.0 A
- 2.Insulation Resistance : 1,000MΩ Min
- 3.Contact Resistance : 20mΩ Max
- 4.Operation Temperature : -40°C to +105°C

### MATERIALS:

- 1.Insulator : Polyester
- 2.Contact : Phosphor Bronze
- 3.Contact Plating : Gold over Nickel

ITEM NO.	DESCRIPTION	DRAWN	DATE	KSD 科斯达电子科技有限公司				DRAWN BY:	DATE	MAT'L	TITLE	SIZE				
4	更新"C"尺寸選項	Jack	080122	<b>KSD</b> SWITCH CONNECTOR 全球 互聯零組件 制造企业 <b>KSD ELECTRONIC TECHNOLOGY Co., LTD</b> TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°				Jack Lu	08/01/22		Female Header					
3	新增尺寸選項	Jack	052322					3RD. ANGEL'S	UNITS	MM	CHECKED BY:	DATE	FINISH	MODLE	2.54 Female Header DIP 2*X PIN數	
2	新增尺寸選項	Jack	070920								Jacky Chen	08/01/22	SCALE	1 : 1	DWG NO.	FH-A11-x2xxx-S304
1	更新算式標示	Jack	122721								APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	FH-A11-x2xxx-S304
								Tony Kao	08/01/22			VER	R4			