

3.1 RATING: 40V , 0.5A

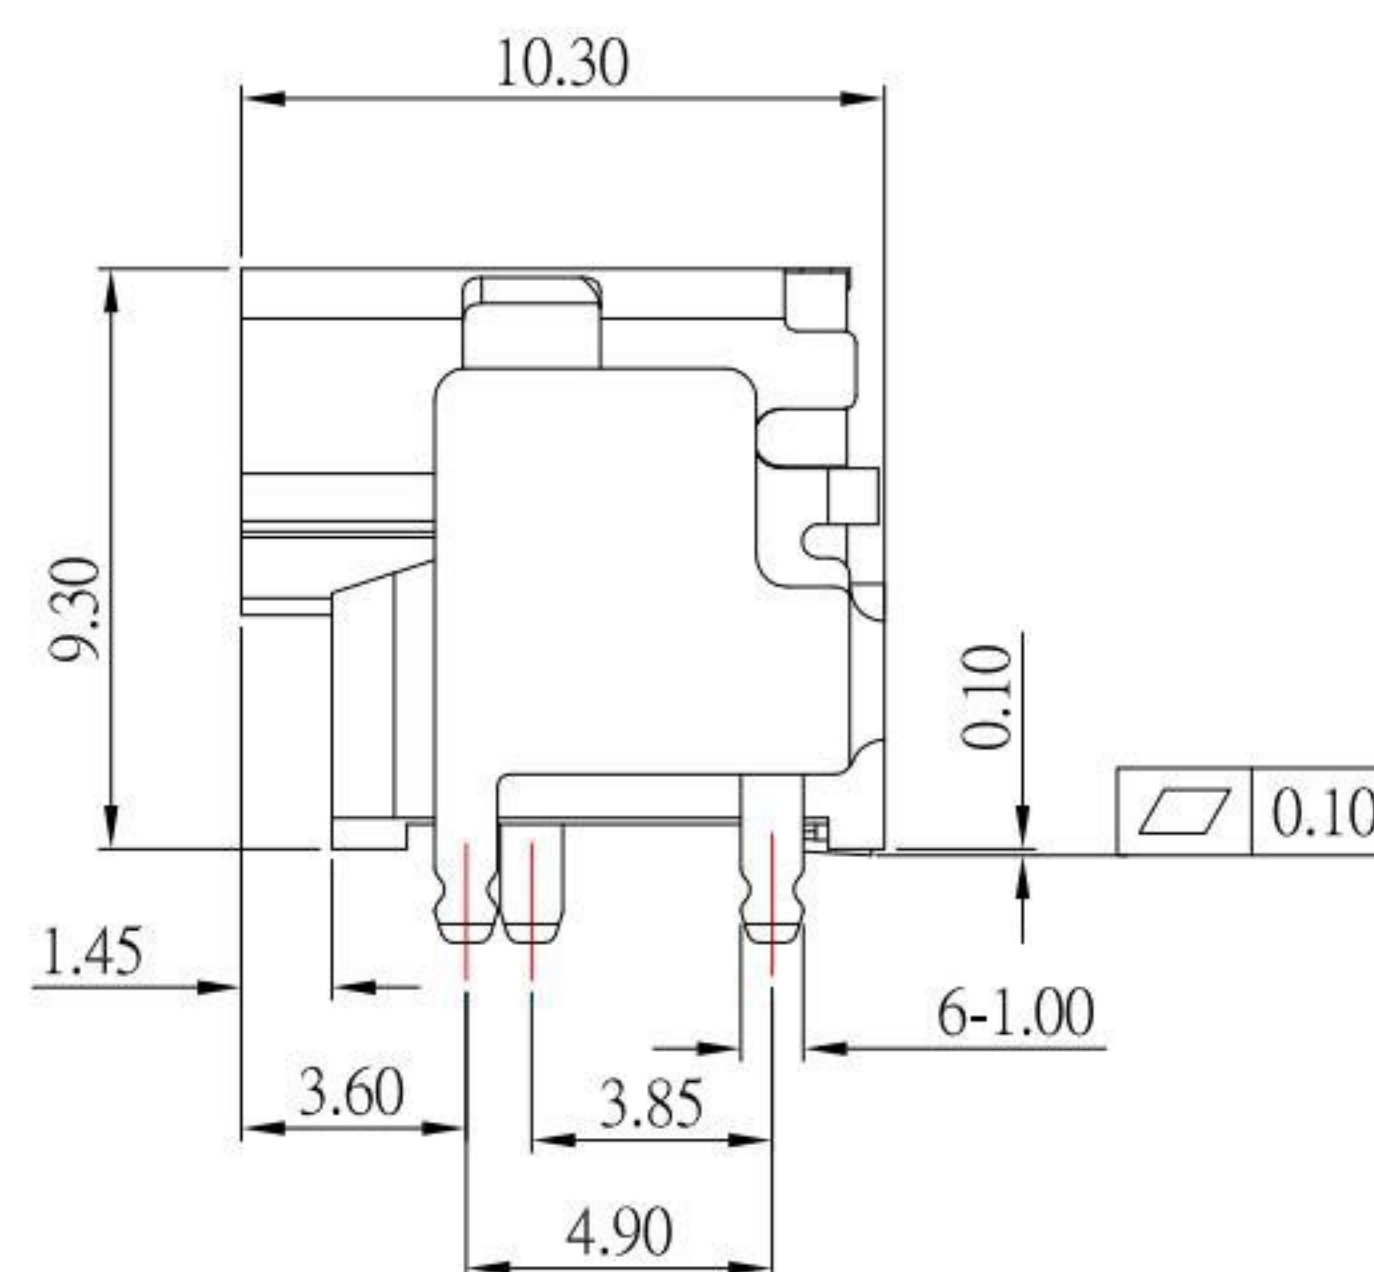
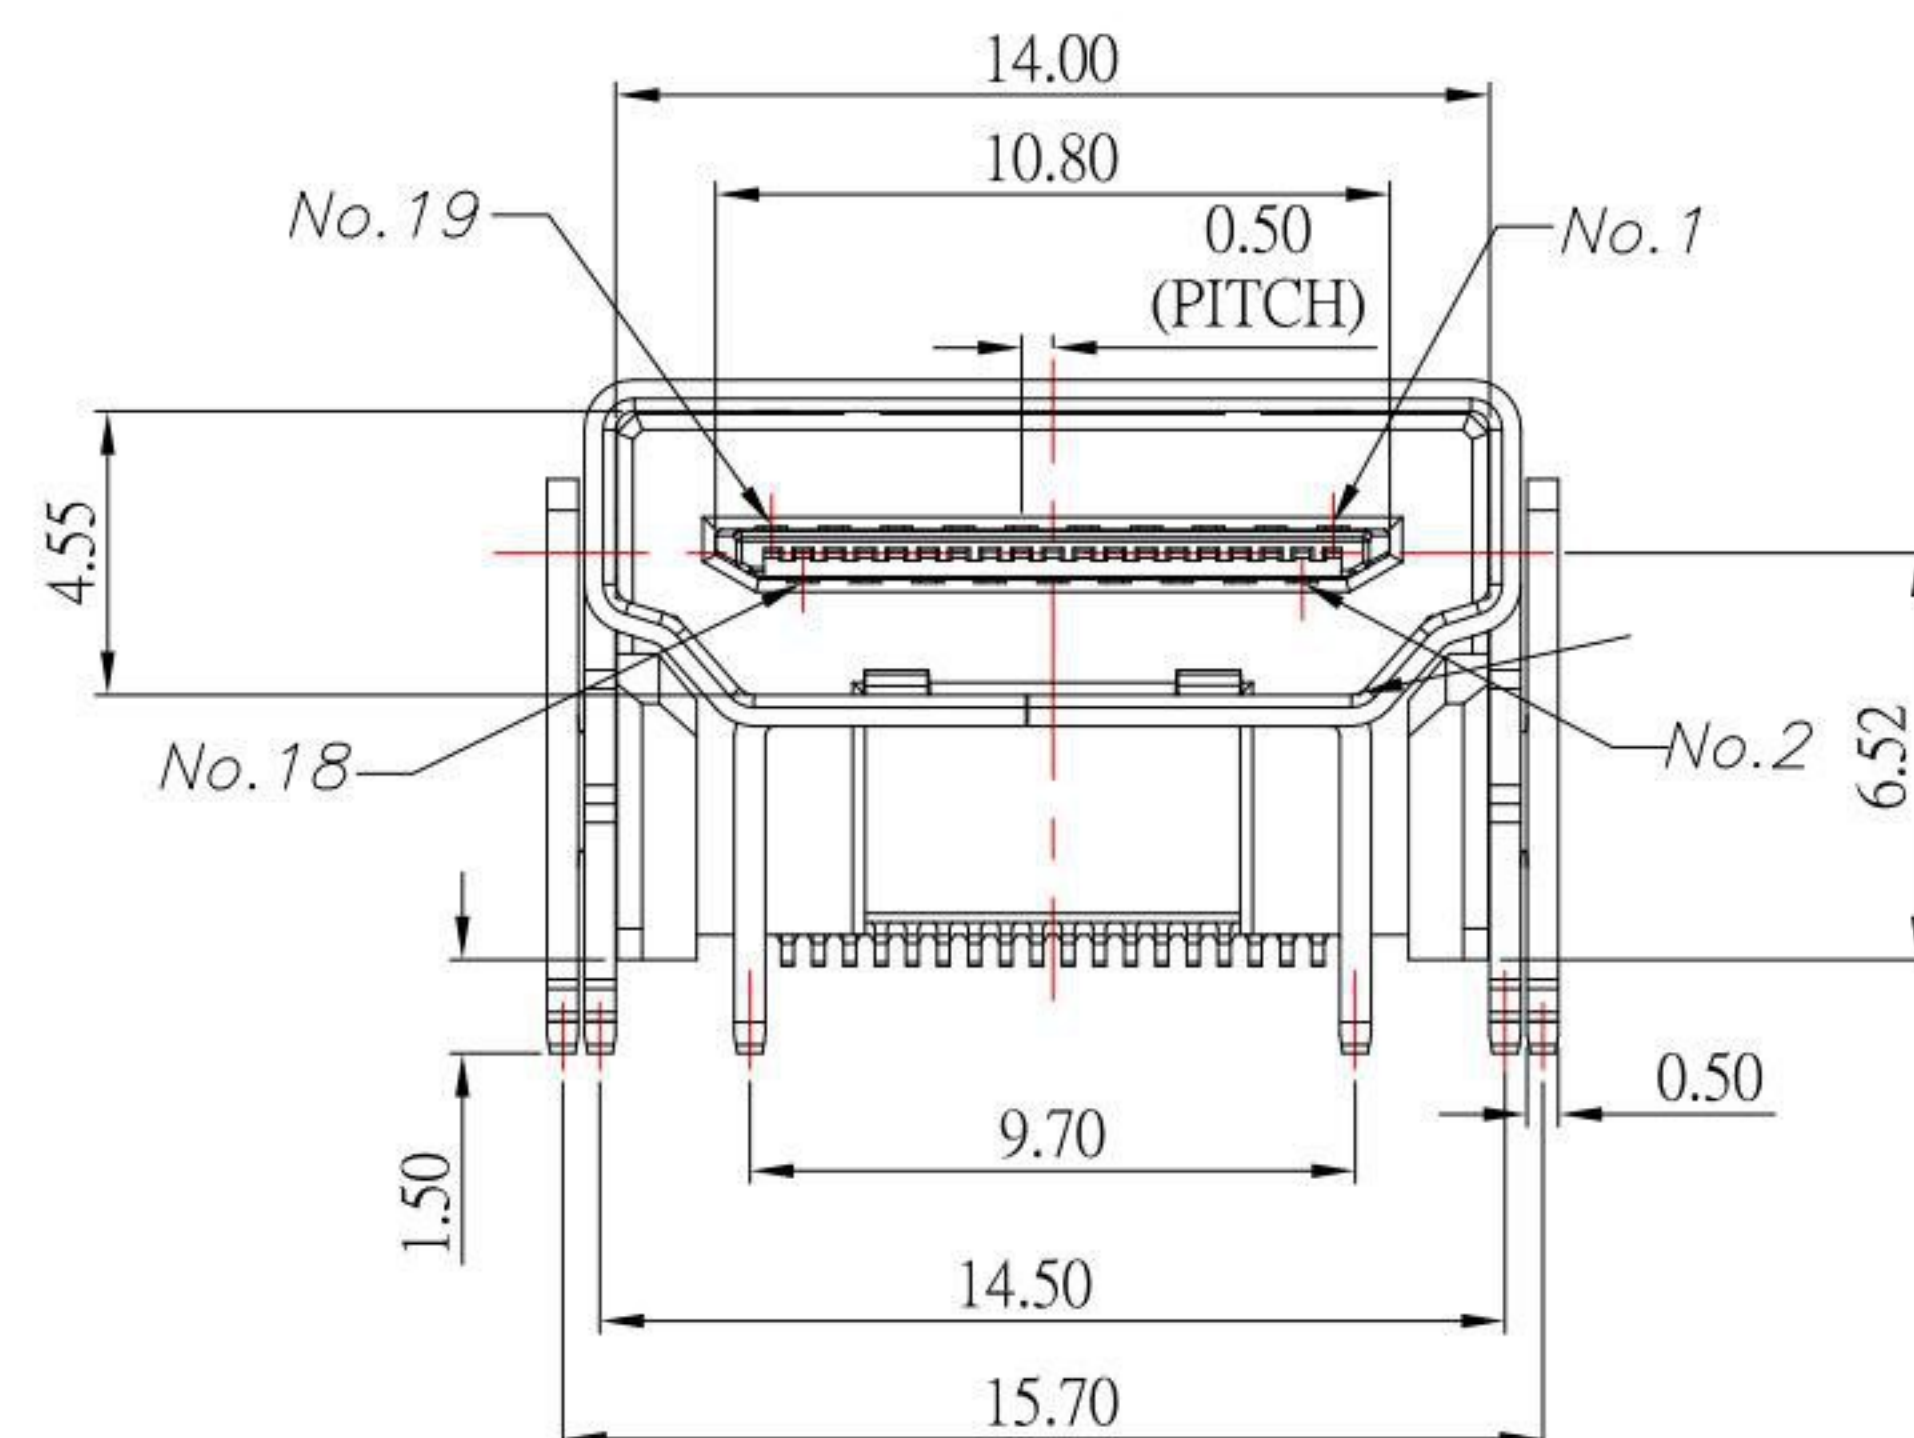
3.2 CONTACT RESISTANCE: 30mΩ MAX

3.3 INSULATION RESISTANCE: 100MΩ MIN

3.4 WITHSTANDING VOLTAGE: 500V AC

3.5 OPERATING TEMPERATURE: -25°C~ 85°C

Blank : 1u"
2 : 15u"
3 : 30u"


[illegible]

KSD 科斯达电子科技有限公司
SWITCH CONNECTOR 全球互联零组件制造企业 KSD ELECTRONIC TECHNOLOGY Co., Ltd

TOLERANCE UNLESS
OTHERWISE STATED

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
Above 30 ~ 50	± 0.5
Angle	$\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	10/19/2017
CHECKED BY:	DATE
Jacky Chen	10/19/2017
APPROVED BY:	DATE
Tony Kao	10/19/2017

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO
PART NO

CONNECTOR
HDMI AF 90 度 SMT 加高
HDMI-19P-SND23x-S455
HDMI-19P-SND23x-S455

	SIZE
	A4
	VER
	P