



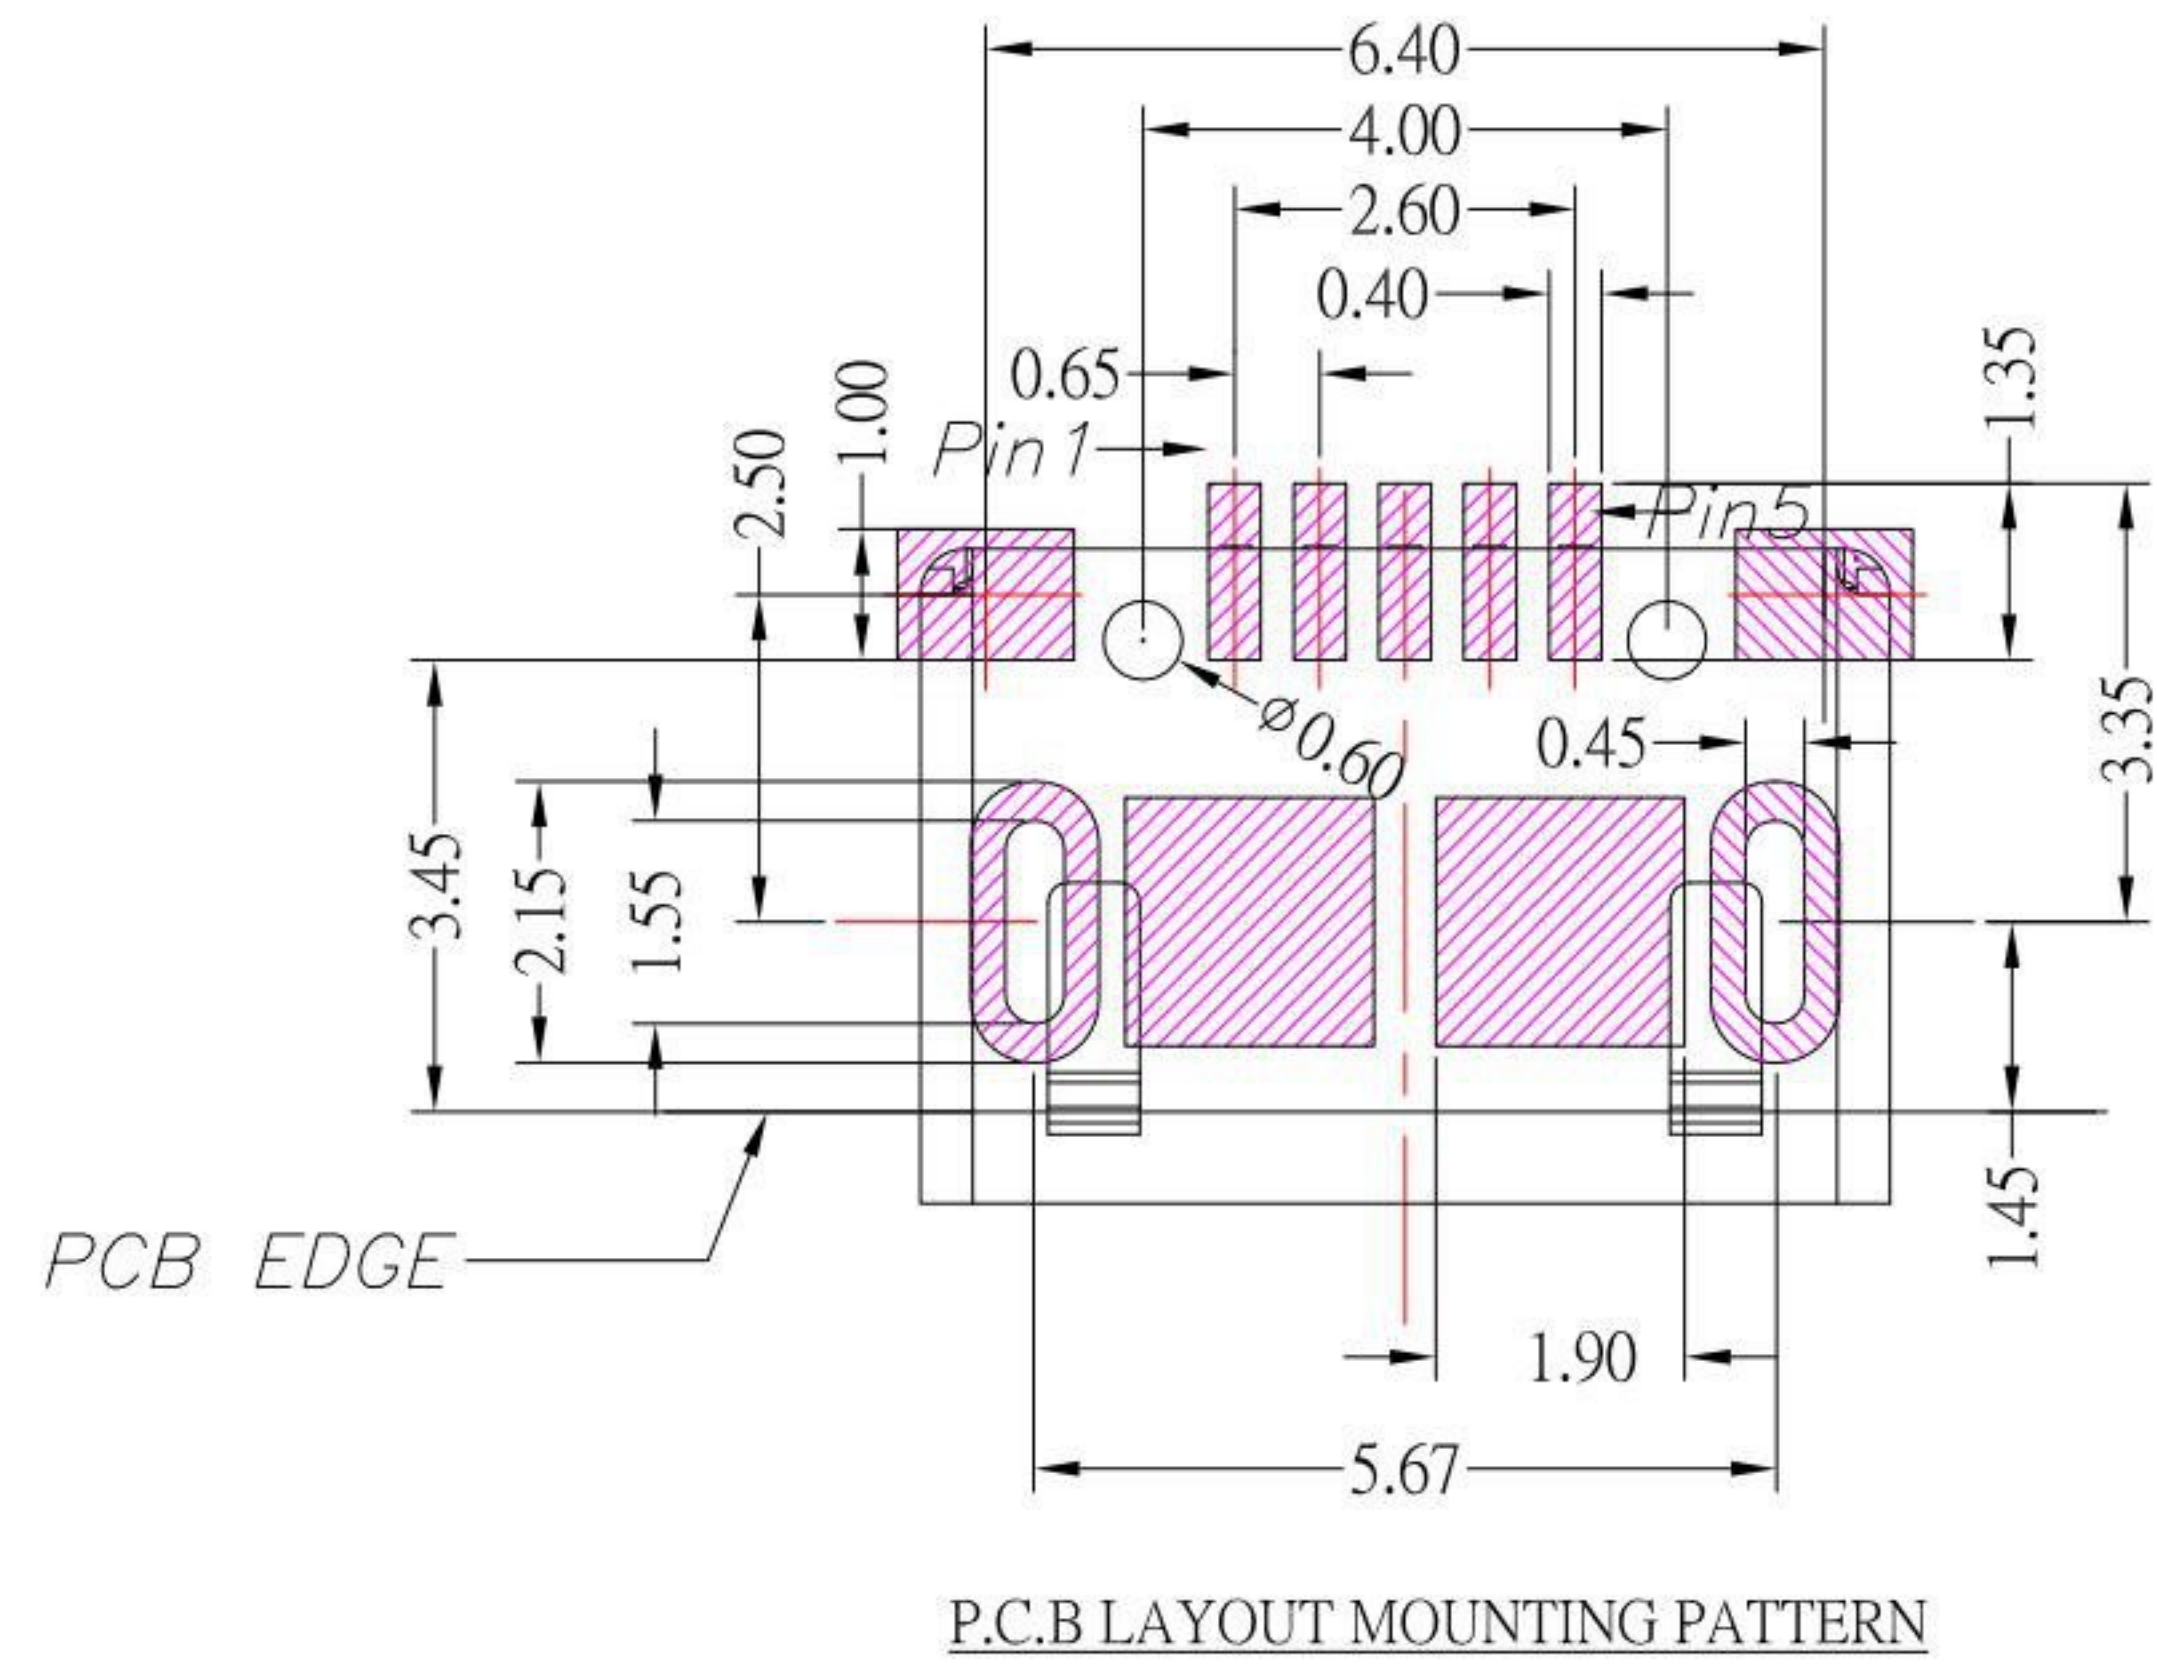

MRUSB-5B-ED8x-S347

SHELL 鍍層:

TN
NI

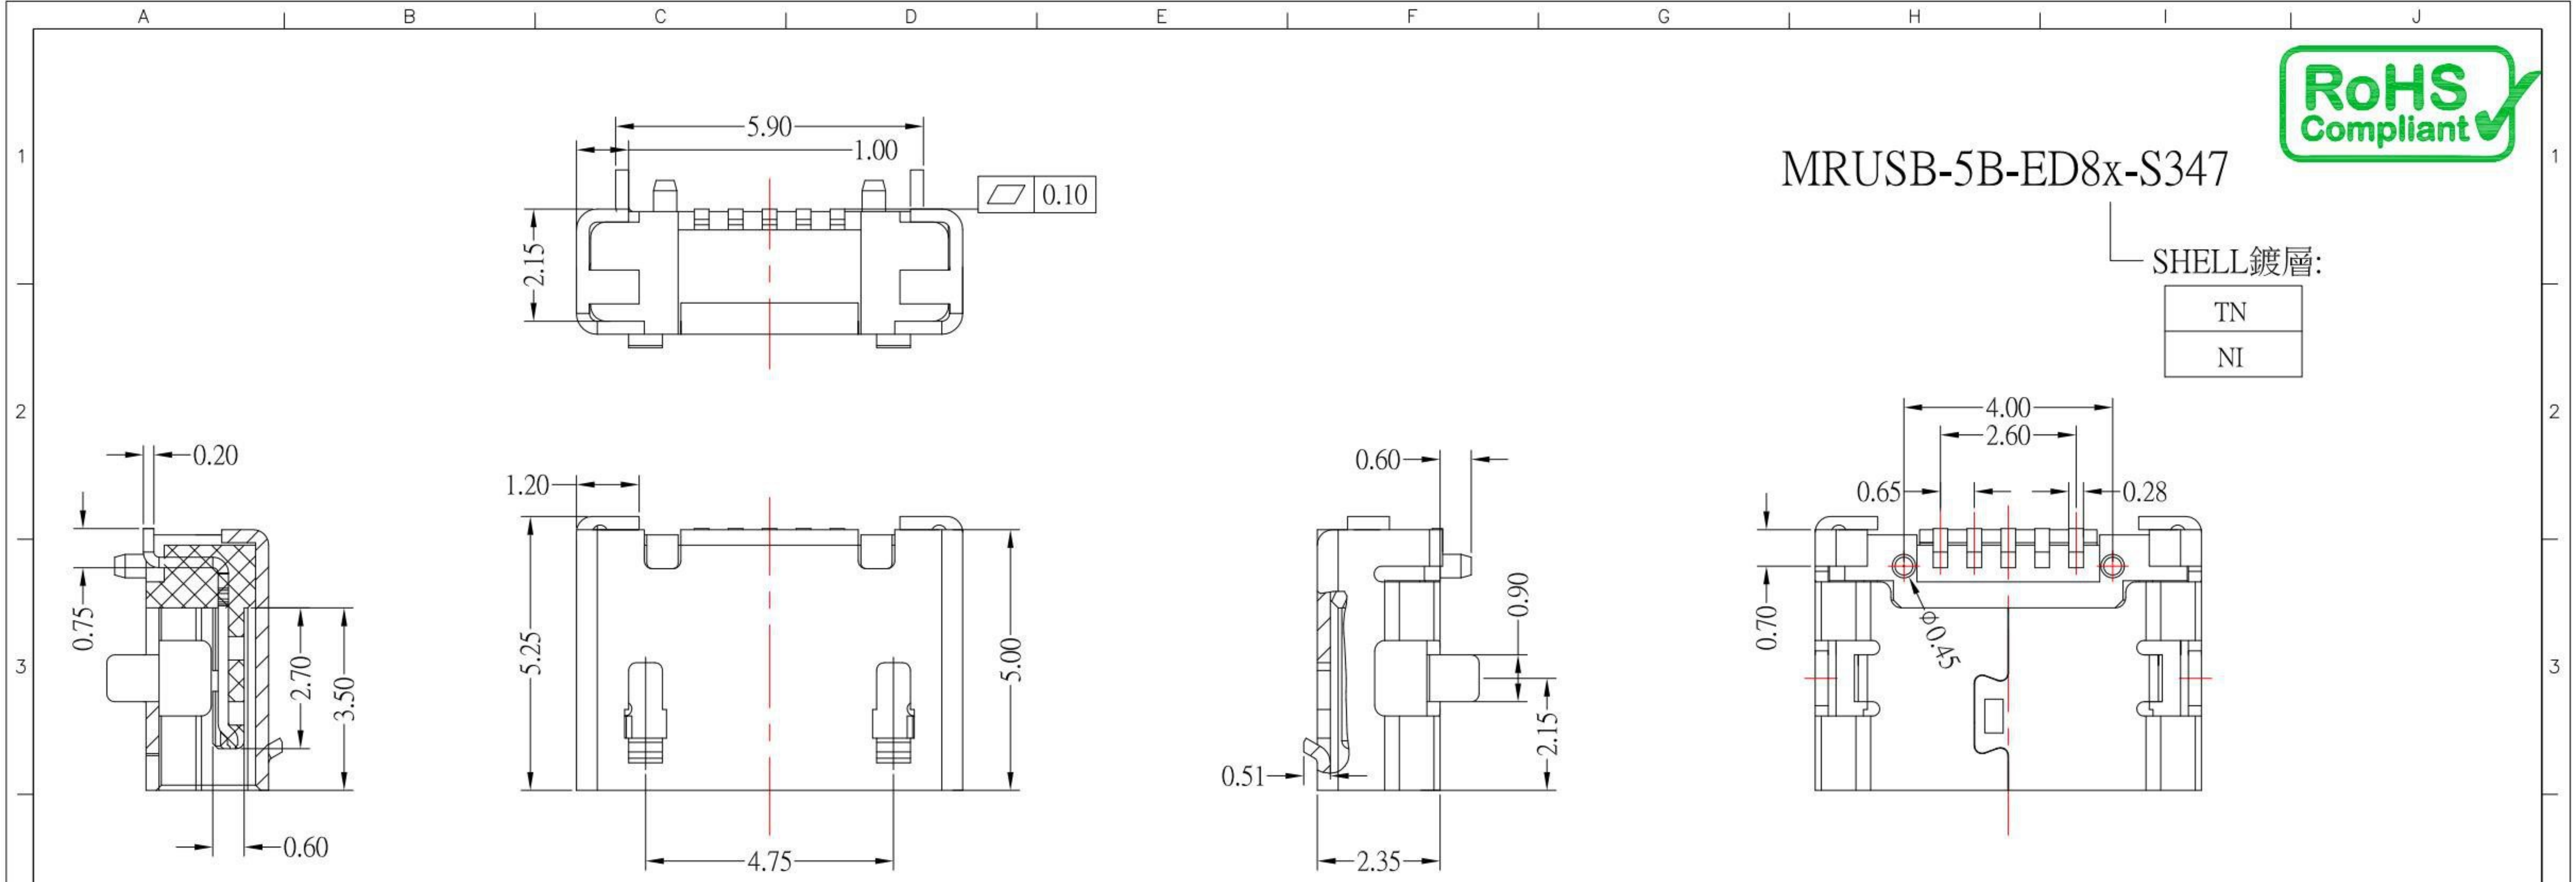

- NOTES:
- MATERIAL:
- 1.1 HOUSING: LCP
 - 1.2 CONTACT: PHOSPHOR BRONZE
 - 1.3 SHELL: BRASS
- Finish:
- 2.1 Contact: Plated Gold in Mating Area ; Gold Plated on Solder Balls Nickel under plated overall
- 3.SPECIFICATION:
- 3.1 CURRENT RATING: 1.0 A MAX
 - 3.2 DIELECTRIC WITHSTANDING VOLTAGE: 100 V(ac) FOR 1min
 - 3.3 CONTACT RESISTANCE: 30 m Ω MAX.
 - 3.4 INSULATION RESISTANCE: 100 M Ω MIN.
 - 3.5 TOTAL MATING FORCE: 3.57 Kgf MAX.
 - 3.6 TOTAL UNMATING FORCE: 1.0 Kgf MIN.
 - 3.7 LIFE: 5,000 CYCLES
 - 3.8 TEMPERATURE RANGE: -30°C ~ +80°C

6	新增尺寸	Jack	071320
5	更新PCB LAYOUT尺寸	Jack	121119
4	更新樣式	Lan	041519
3	新增PCB LAYOUT尺寸	Jack	112317
2	更新端子長度	Jack	060617
1	新增PCB LAYOUT尺寸	Jack	020317
ITEM NO.	DESCRIPTION	DRAWN	DATE

KSD 科斯达电子科技有限公司

SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD

全球 互聯零組件 制造企业

TOLERANCE UNLESS OTHERWISE STATED:

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	07/13/20		MODLE	MICRO USB B TYPE 前插5.67 後貼有柱 平口
CHECKED BY:	DATE	FINISH	DWG NO.	MRUSB-5B-ED8x-S347
Jacky Chen	07/13/20		PART NO.	MRUSB-5B-ED8x-S347
APPROVED BY:	DATE	SCALE	SHEET NO.	1 of 1
Tony Kao	07/13/20	1 : 1		
			SIZE	A4
			VER	R6