


PCB LAYOUT MOUNTING PATTERN

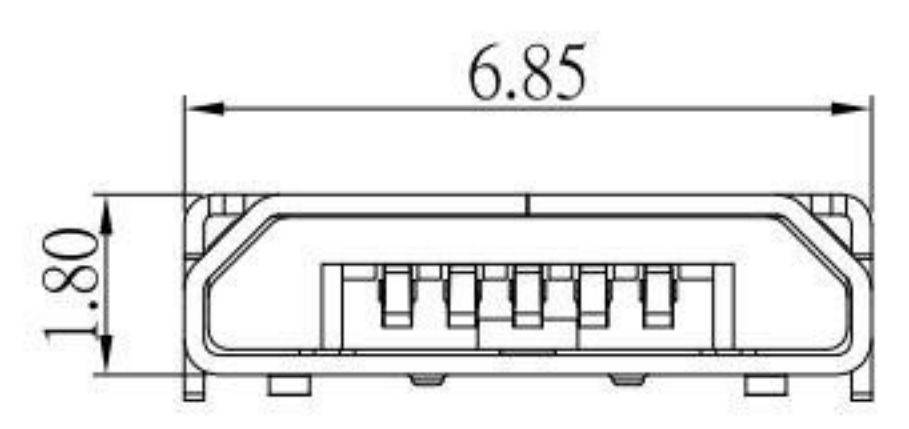

Pin Assignments

Contact No.	Signal Name
1	VBUS
2	D-
3	D+
4	ID
5	GND
SHELL	Shield

SPECIFICATIONS

Electrical:

- 1.Current Rating: 1.8 A(Pin1,Pin5) / 1.0 A(Pin2,3,4)
- 2.Voltage Rating: 30V DC
- 3.Contact Resistance: 30 mΩ Max
- 4.Dielectric Withstanding Voltage: 500 V AC
- 5.Insulation Resistance: 100 MΩ Min

Environmental:

- 1.Operating Temperature: -20°C ~ 85°C

KSD 科斯达电子科技有限公司
 SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD
 全球 互聯零組件製造企業

TOLERANCE UNLESS OTHERWISE STATED:
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	03/10/21		MODLE	MICRO USB 5 P 公頭貼板反向
CHECKED BY:	DATE	FINISH	DWG NO.	MRUSB-5PLM3-S235
Jacky Chen	03/10/21		SCALE	1 : 1
APPROVED BY:	DATE	SHEET NO.	PART NO.	MRUSB-5PLM3-S235
Tony Kao	03/10/21	1 of 1		

ITEM NO.	DESCRIPTION	DRAWN	DATE
4	更新圖面	Jack	031021
3	更新圖面	Jack	121018
2	更新圖面樣式	Jack	082218
1	更新PCB LAYOUT尺寸	Jack	121916