



PCB LAYOYT

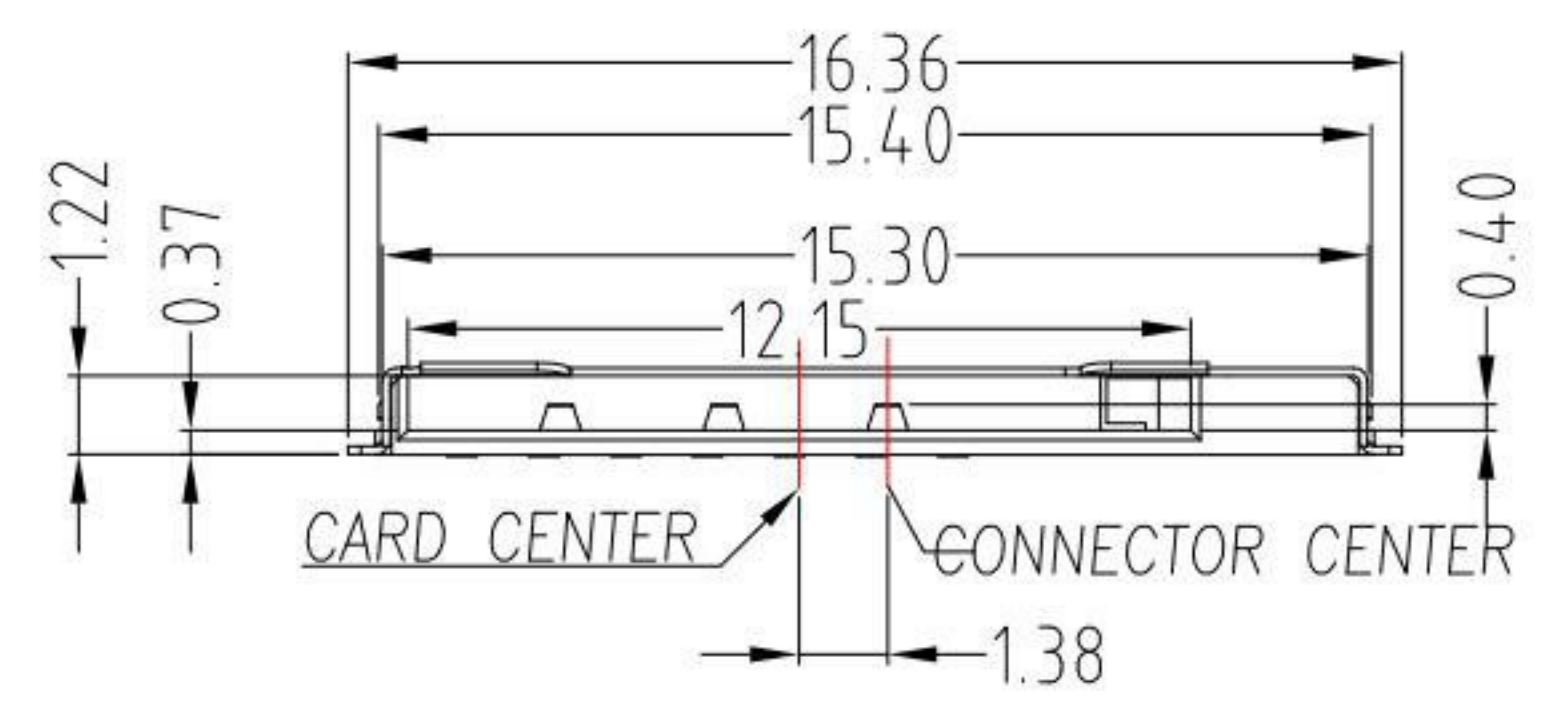

SIM pin assignment	
PIN#	Name
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

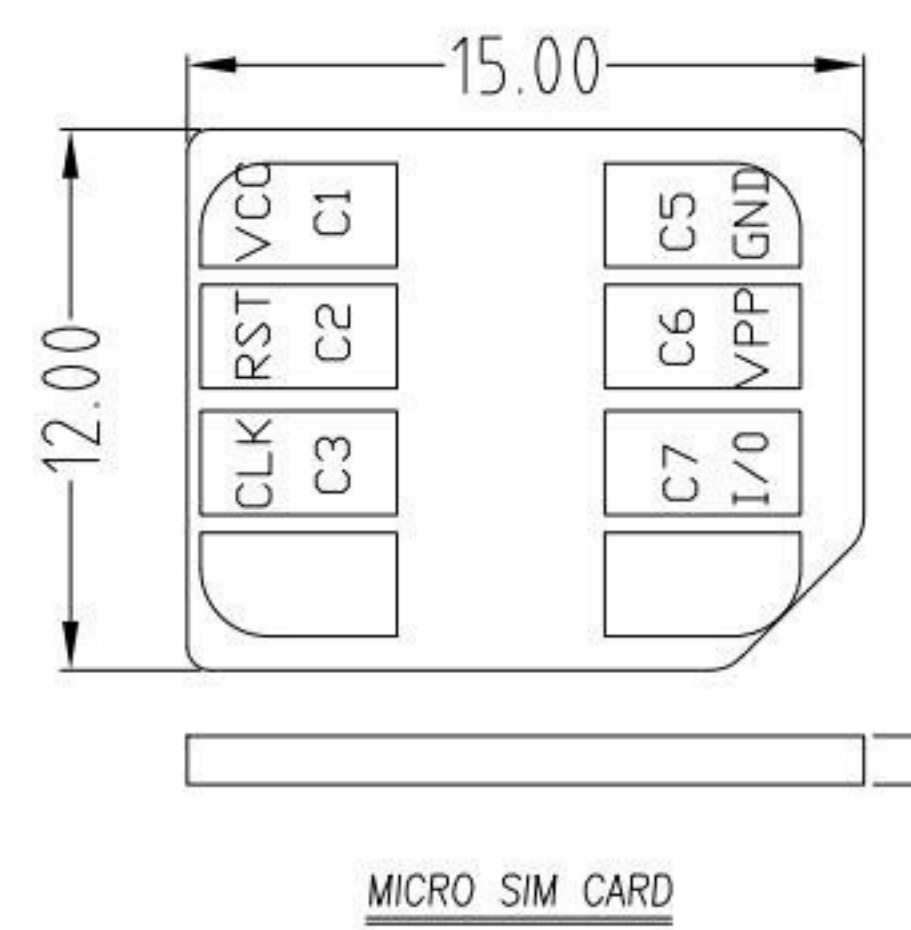

C1:VCC
C2:RST
C3:CLK
C4:RESERVED
C5:GND
C6:VPP
C7:I/O
C8:RESERVED

SPECIFICATION

- Electrical :
- 1.Current Rating: 0.5A
 - 2.Voltage Rating: 125V AC/DC
 - 3.Contact Resistance: 100 mΩ Max.
 - 4.Insulation Resistance: 1000 MΩ Min.
- Environmental:
- 1.Operating Temperature: -20°C ~ +60°C.

Material:

- 1.Housing: LCP
 - 2.Contact: Copper Alloy
 - 3.Shell: Stainless Steel
- Finish:
- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
 - 2.Shell: Nickel under Plated surface layer

ITEM NO.	DESCRIPTION	DRAWN	DATE
6	更新尺寸	Jack	092619
5	更新圖面	Jack	092319
4	更新樣式	Jack	011119
3	更新料號及卡樣式	Jack	100318
2	更新料號及卡樣式	Jack	091918
1	更新尺寸標示	Jack	080718

KSD 科斯达电子科技有限公司
SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD
全球 互聯零組件 制造企业

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTION
Jack Lu	09/26/19		CONNECTOR	
CHECKED BY:	DATE	FINISH	MODLE	
Jacky Chen	09/26/19		MICRO SIM PUSH. H1.35	
APPROVED BY:	DATE	SCALE	DWG NO.	SIZE
Tony Kao	09/26/19	1 : 1	MSIM-0121A07-S267	A4
SHEET NO.		PART NO.		VER
1 of 1		MSIM-0121A07-S267		R6