
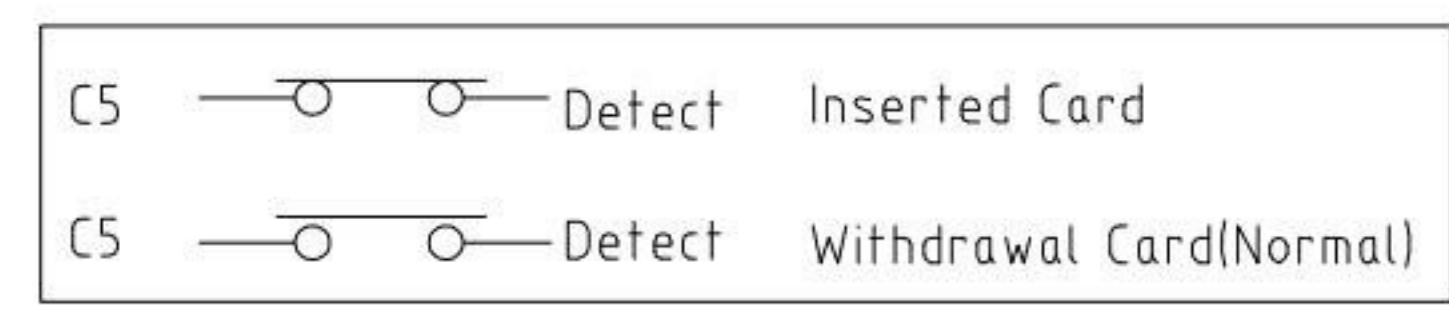


PCB LAYOYT

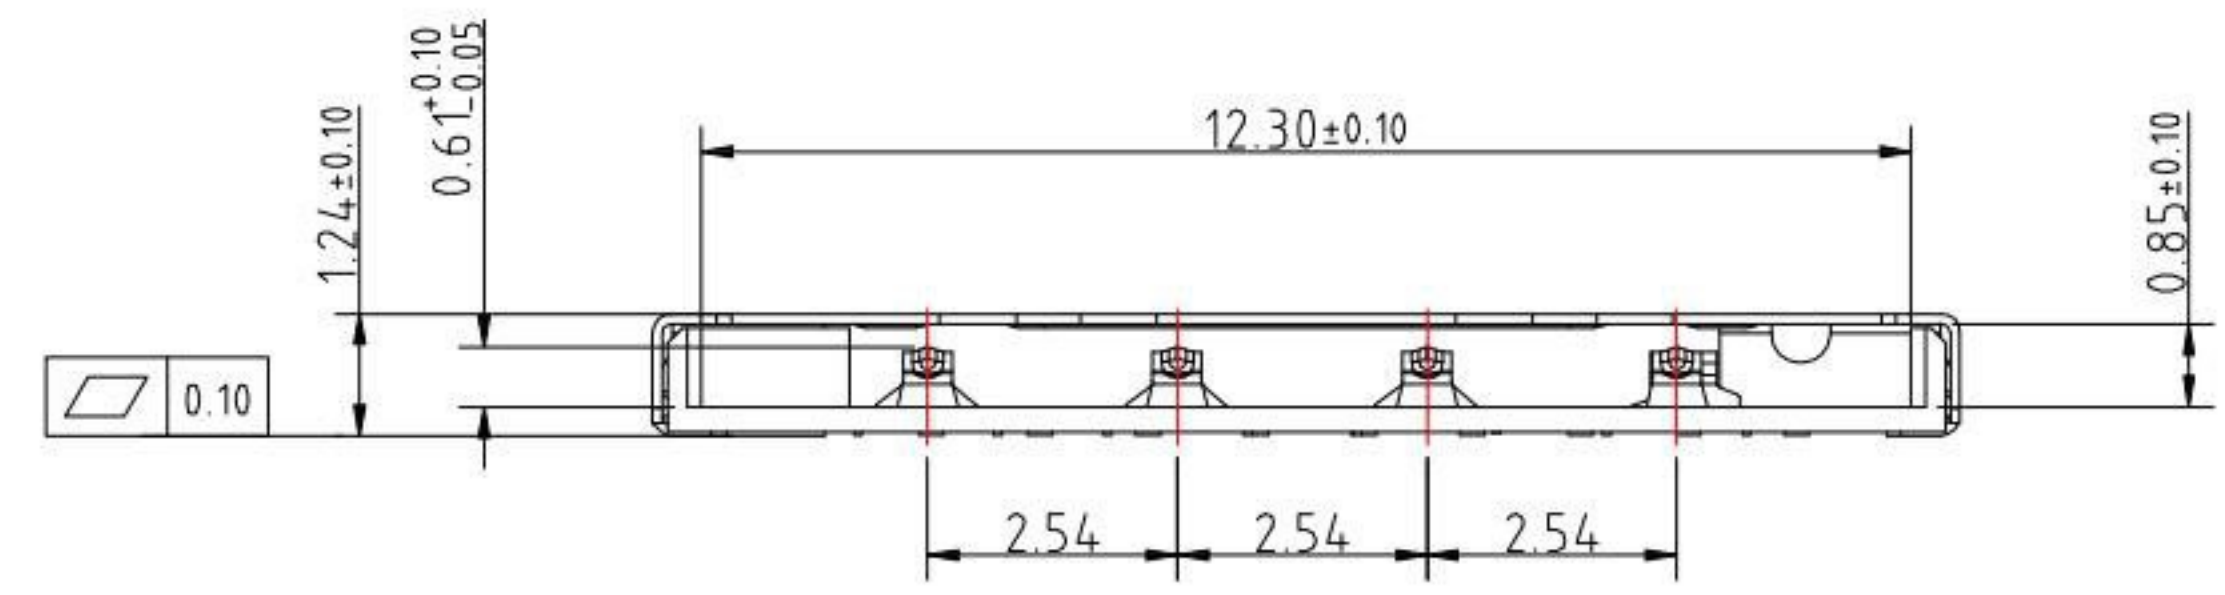

Pin Assignments

PIN	Name
C1	Vcc
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	Vpp
C7	I/O
C8	Reserved

SPECIFICATION

Electrical :
 1.Current Rating: 1.0A
 2.Contact Resistance: 100 mΩ Max.
 4.Insulation Resistance: 1000 MΩ Min.

Environmental:
 1.Operating Temperature: -25°C ~ +85°C.

Material:

1.Housing: LCP
 2.Contact: Copper Alloy
 3.Shell: Stainless Steel

Finish:
 1.Contact: Plated Gold in Mating Area ;
 Tin Plated on Solder Balls ;
 Nickel under plated overall
 2.Shell: Nickel under Plated surface layer

KSD 科斯达电子科技有限公司
 SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD
 全球 互联零组件制造企业

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2	3RD. ANGEL'S	UNITS	MM
	Above 5 ~ 15 ±0.3			
	Above 15 ~ 30 ±0.4			
	Above 30 ~ 50 ±0.5			
	Angle ±0.3			

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	09/17/18		MODLE	MICRO SIM H1.24
CHECKED BY:	DATE	FINISH	DWG NO.	MSIM-0124-S267
Jacky Chen	09/17/18		PART NO.	MSIM-0124-S267
APPROVED BY:	DATE	SCALE	1 : 1	
Tony Kao	09/17/18	SHEET NO.	1 of 1	

ITEM NO.	DESCRIPTION	DRAWN	DATE

SIZE	A4
VER	R