
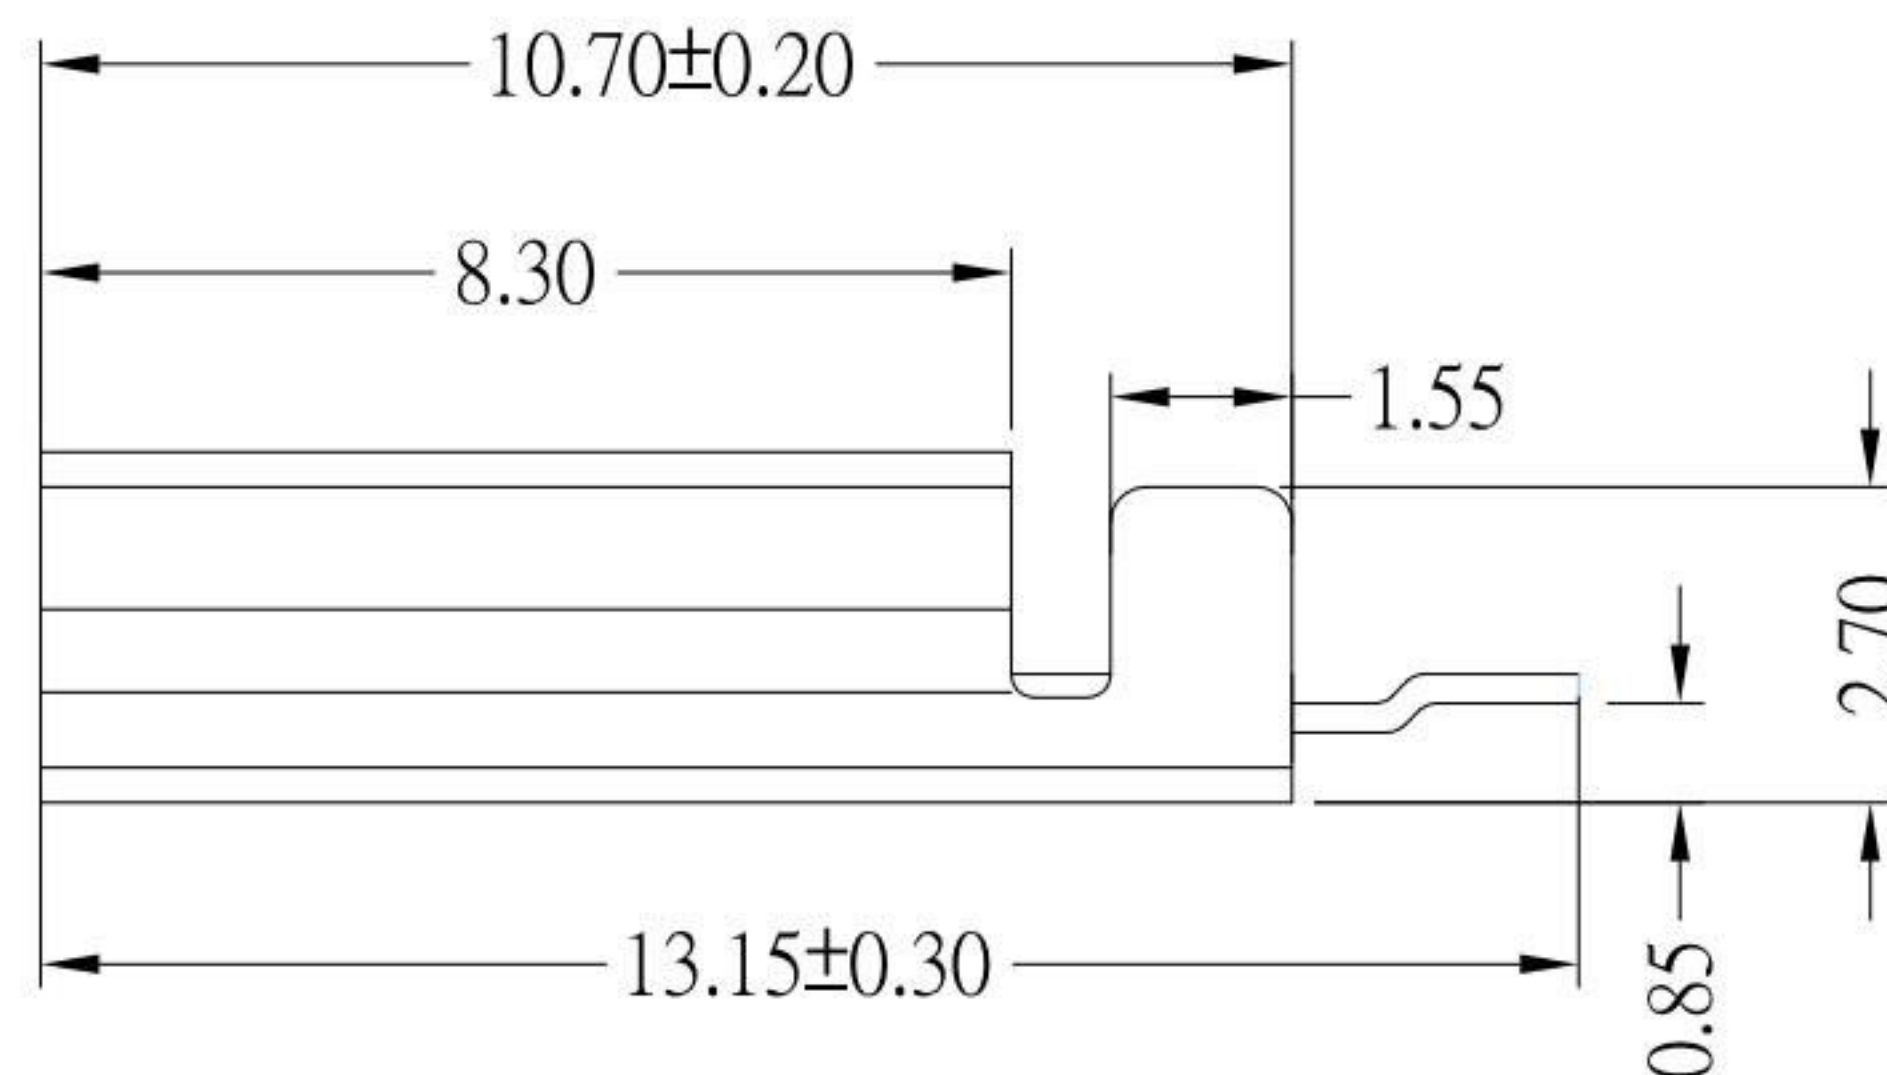


RECOMMENDED P.C.B LAYOUT

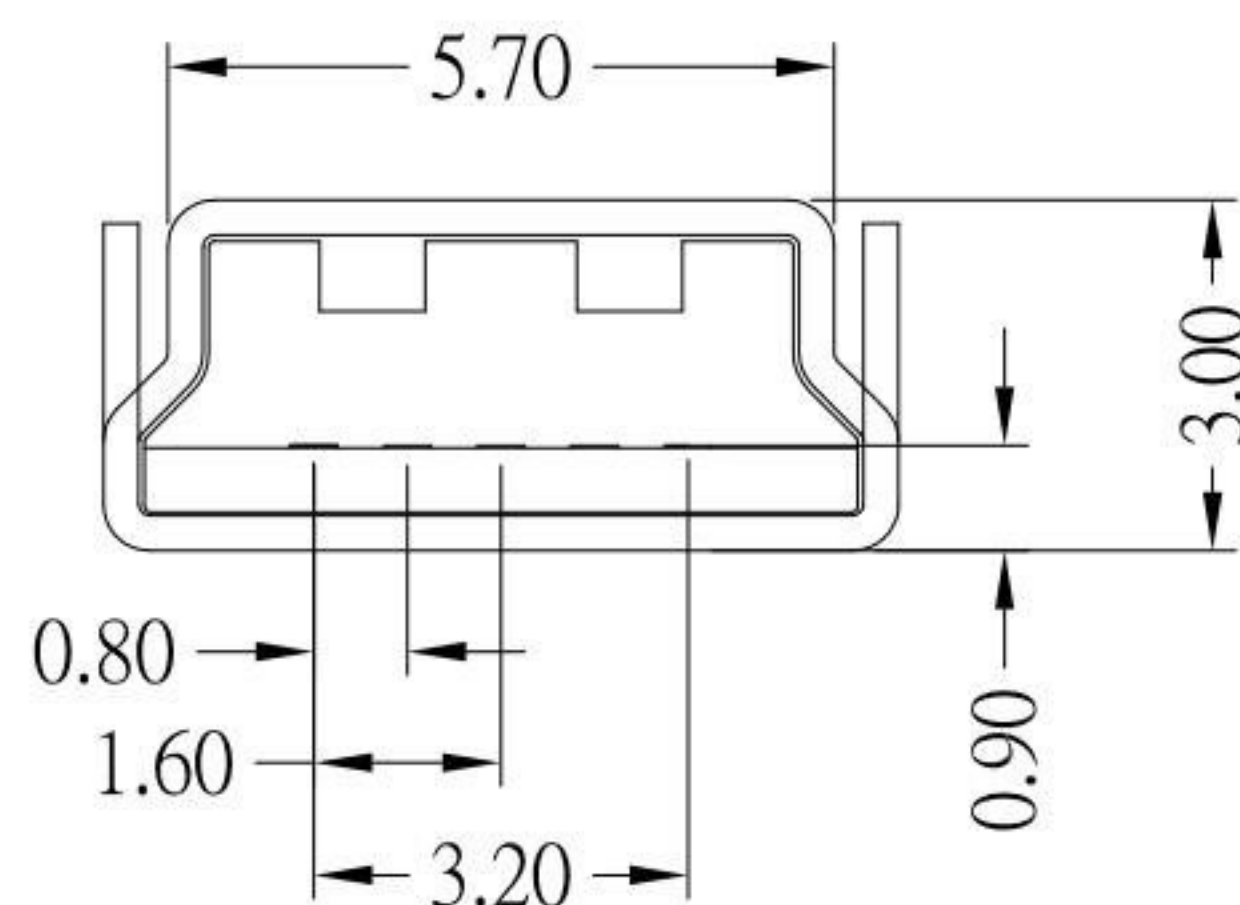

SPECIFICATIONS

Material:

- 1.Housing: LCP
- 2.Contact: Brass
- 3.Shell: Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

Electrical Characteristics:

- 1.rating: 30V AC , 1.5 A
- 2.Contact resistance: 30 mΩ Max
- 3.Insulation resistance: 1,000 MΩ Min
- 4.Dielectric withstanding voltage: 500V AC

KSD 科斯达电子科技有限公司
SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD
全球 互联零组件制造企业

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 30 ±0.3
Above 30 ~ 50 ±0.4
Above 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S



UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	03/02/23			
CHECKED BY:	DATE	FINISH	MODLE	MINI USB 5P Male 板端 SMT帶柱
Jacky Chen	03/02/23			
APPROVED BY:	DATE	SCALE	DWG NO.	MUSB-5BPLM1-S236
Tony Kao	03/02/23	1 : 1	PART NO.	MUSB-5BPLM1-S236
		SHEET NO.	1 of 1	

2	更新圖面	Jack	030223
1	新增尺寸	Jack	061121
ITEM NO.	DESCRIPTION	DRAWN	DATE