
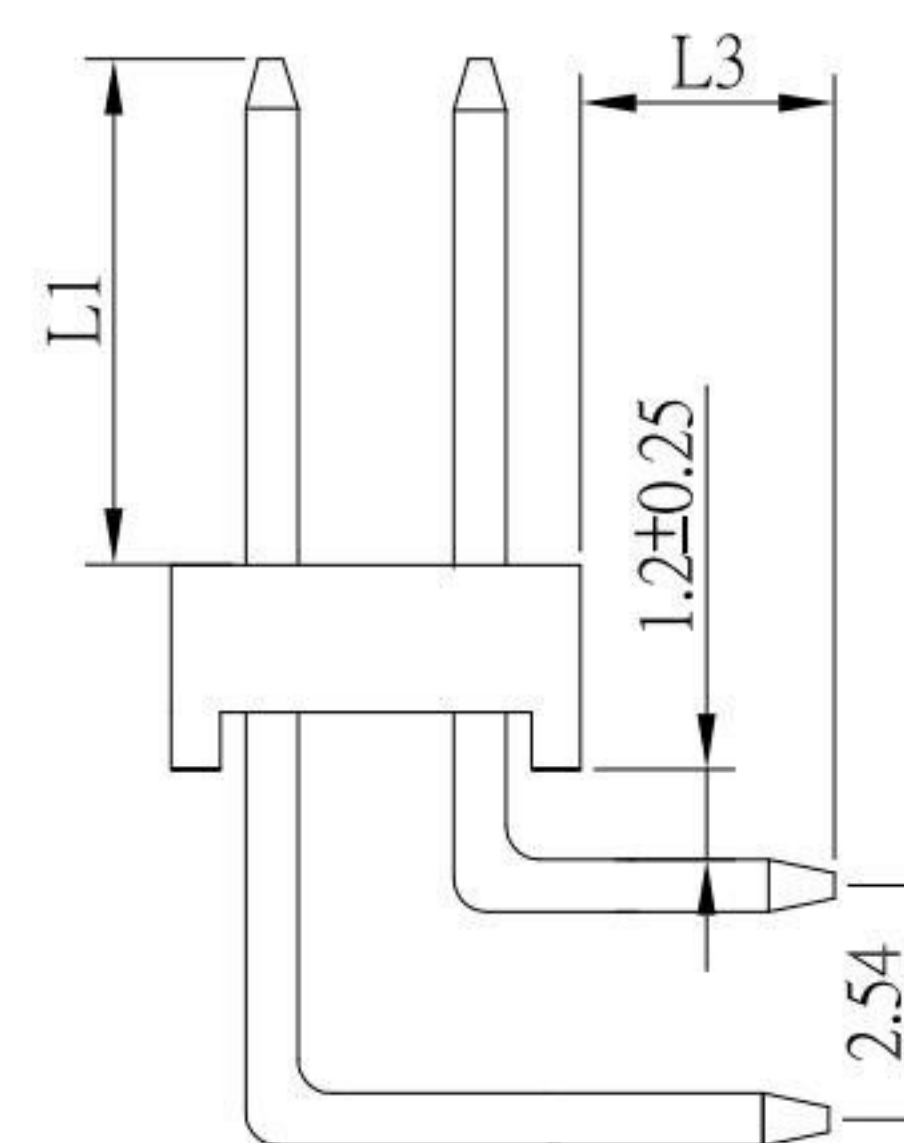


Recommended P.C.B Layout

PH-A12-32xxx-S304

PIN數

	L1	L2	L3
A	6.0	2.54	3.0
B	6.0	1.50	3.0

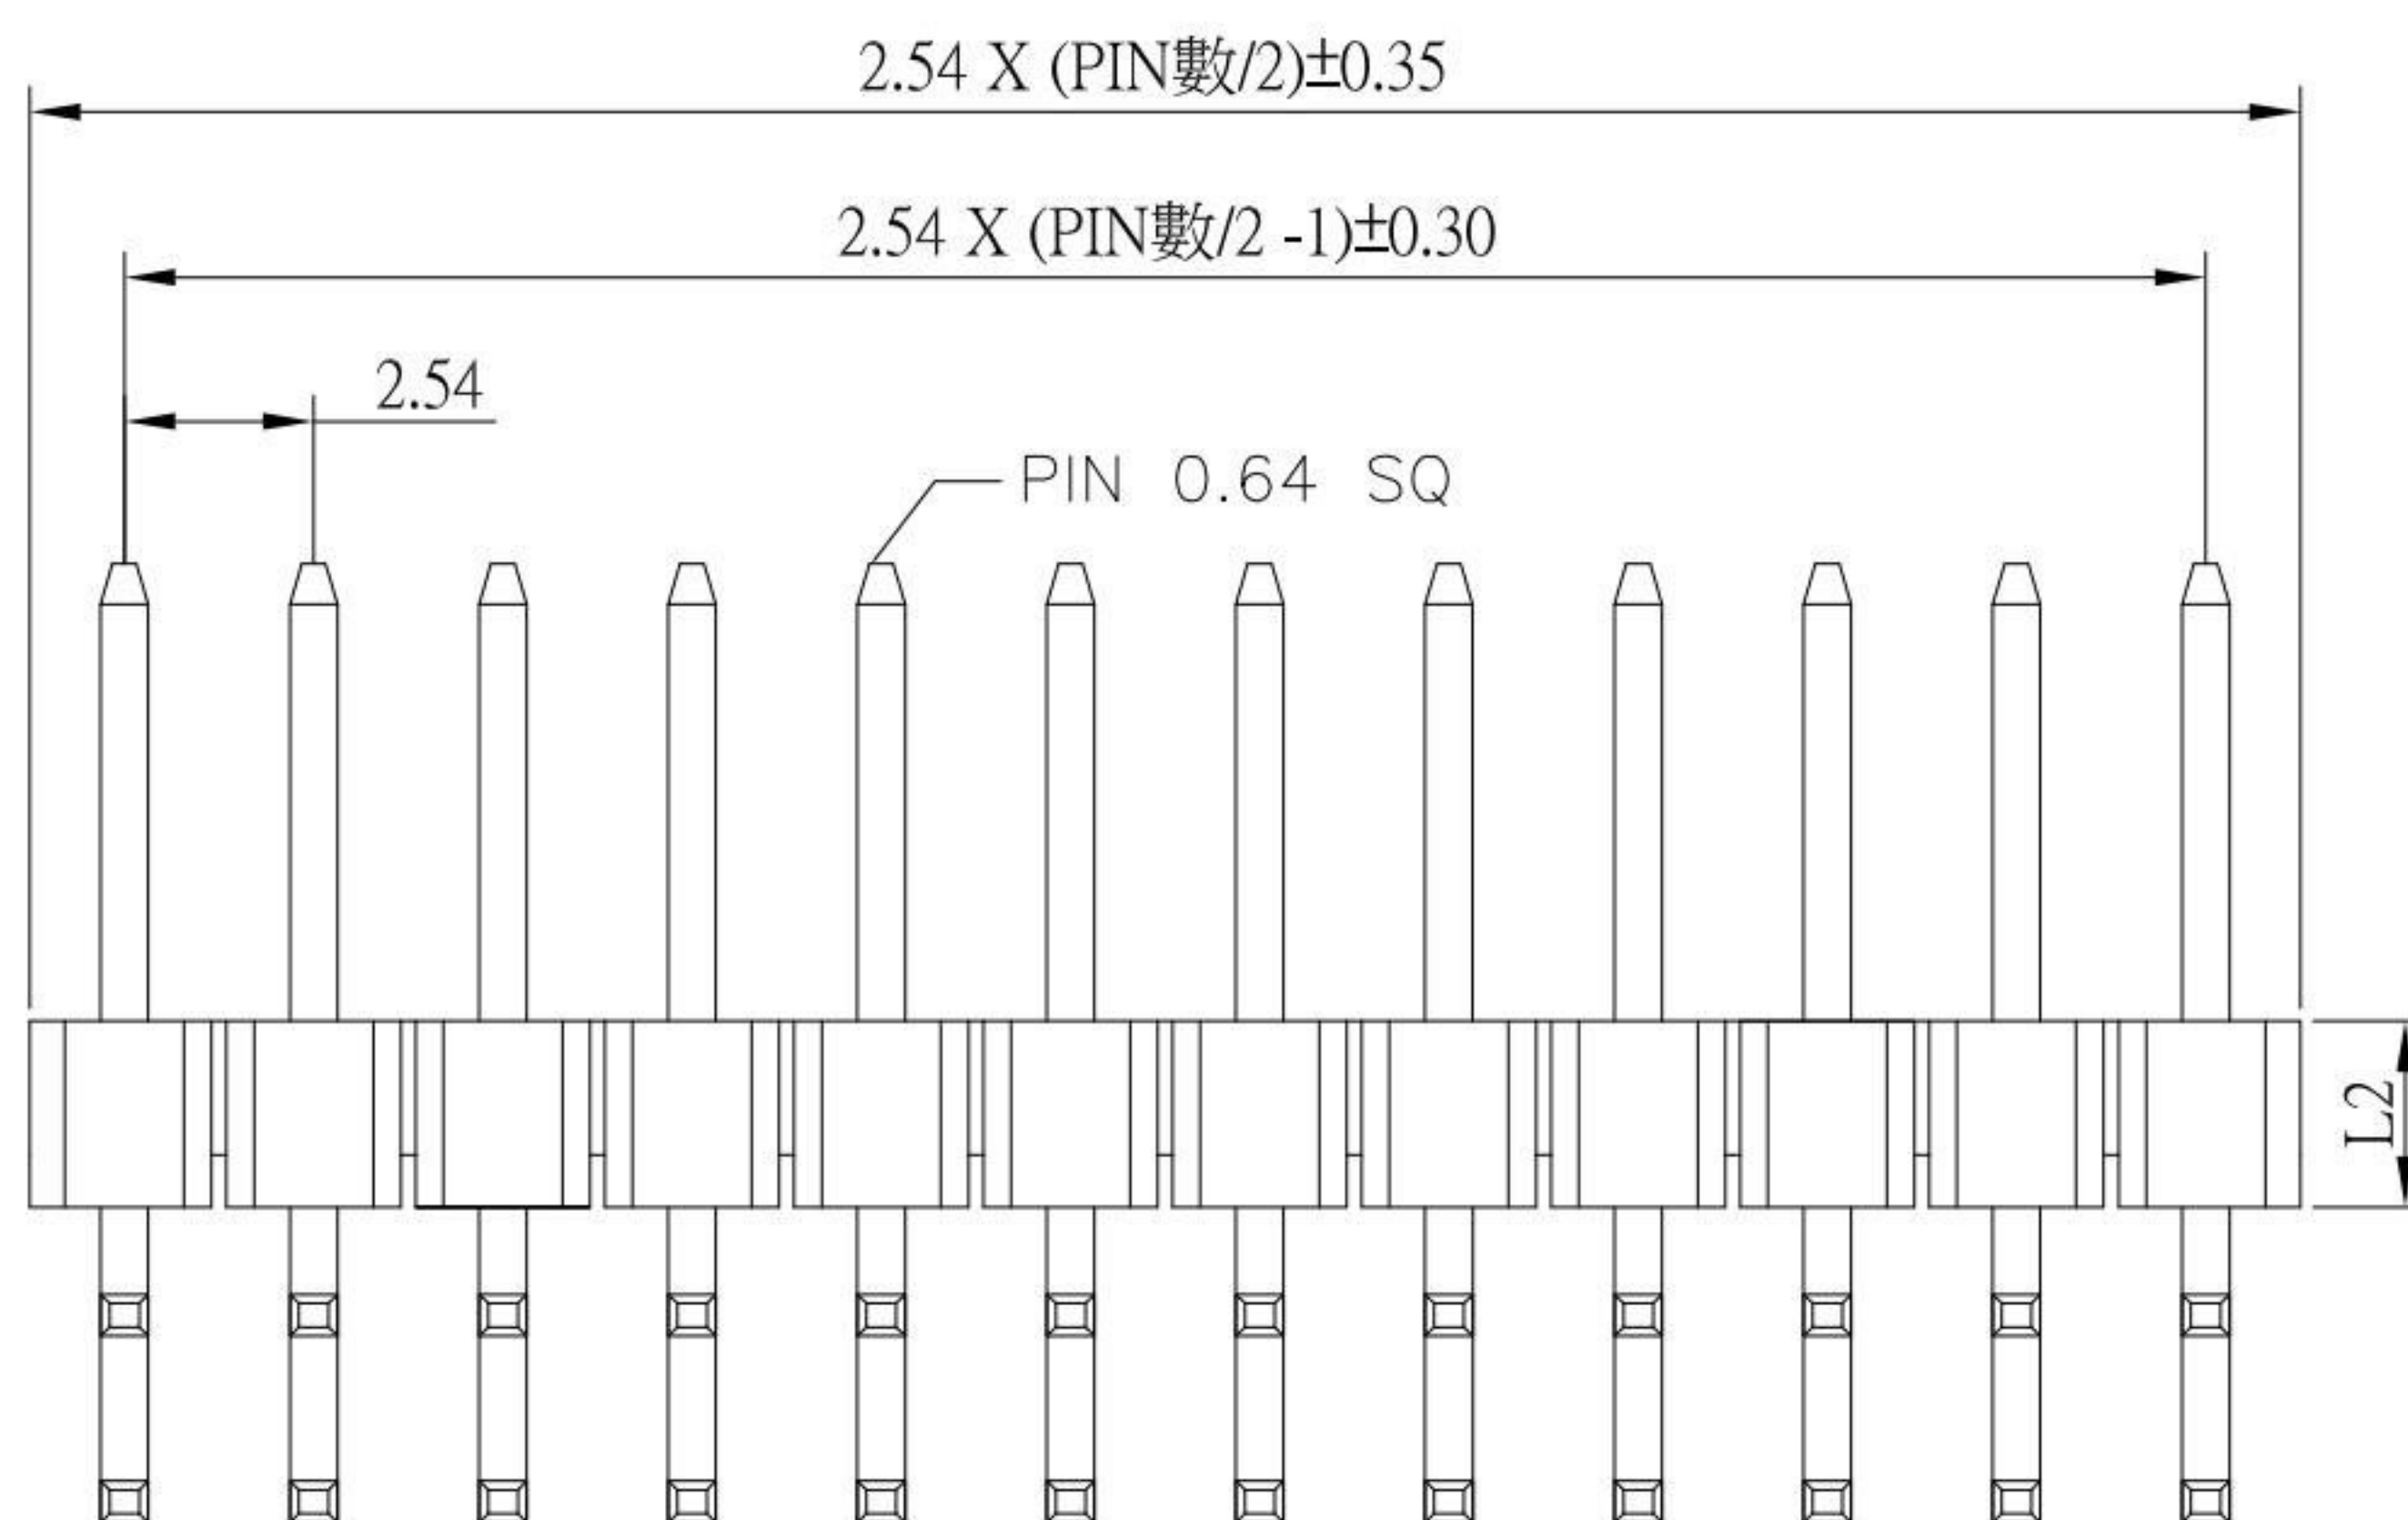

Specifications

Current Rating : 3.0 Amp

Contact Resistance : 20 mΩ Max.

Insulator Resistance : 1000 MΩ Min.

Dielectric Withstanding : AC 1000 V

Operating Temperature : -40°C ~ +105°C

Contact Material : Brass ,Gold Plated

Insulator Material : PA6T,UL 94V-0

KSD 科斯达电子科技有限公司
 SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD
 全球 互联零组件制造企业

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2	3RD. ANGEL'S	UNITS	MM
	Above 5 ~ 15 ±0.3			
	Above 15 ~ 30 ±0.4			
	Above 30 ~ 50 ±0.5			
	Angle ±0.3°			

DRAWN BY:	DATE	MAT'L	TITLE	Pin Header
Jack Lu	05/17/19			
CHECKED BY:	DATE	FINISH	MODLE	2.54mm Pin Header H:2.54 90° 2*X PIN數
Jacky Chen	05/17/19			
APPROVED BY:	DATE	SCALE	DWG NO.	PH-A12-32xxx-S304
Tony Kao	05/17/19	1 : 1		
		SHEET NO.	PART NO.	PH-A12-32xxx-S304
		1 of 1		
				SIZE A4
				VER R1

1	新增選項	Jack	051719
ITEM NO.	DESCRIPTION	DRAWN	DATE