



PH-B21-31xxx-S304

PIN數





	L1	L2	L3
A	6.0	4.0	3.0
B	6.0	4.5	3.0
C	2.0	4.5	2.0
D	1.5	4.3	1.5
E	4.0	4.2	2.8
F	4.0	8.2	2.8

Specifications

- 1.Current Rating : 1.5 Amp
- 2.Insulator Resistance : 1000 MΩ Min.
- 3.Contact Resistance : 20 mΩ Max.
- 4.Dielectric Withstanding : AC 500 V
- 5.Operating Temperature : -40°C ~ +105°C

Materials:

- 1.Contact Material : Phosphor Bronze, Au over Ni
- 2.Insulator Material :PA6T

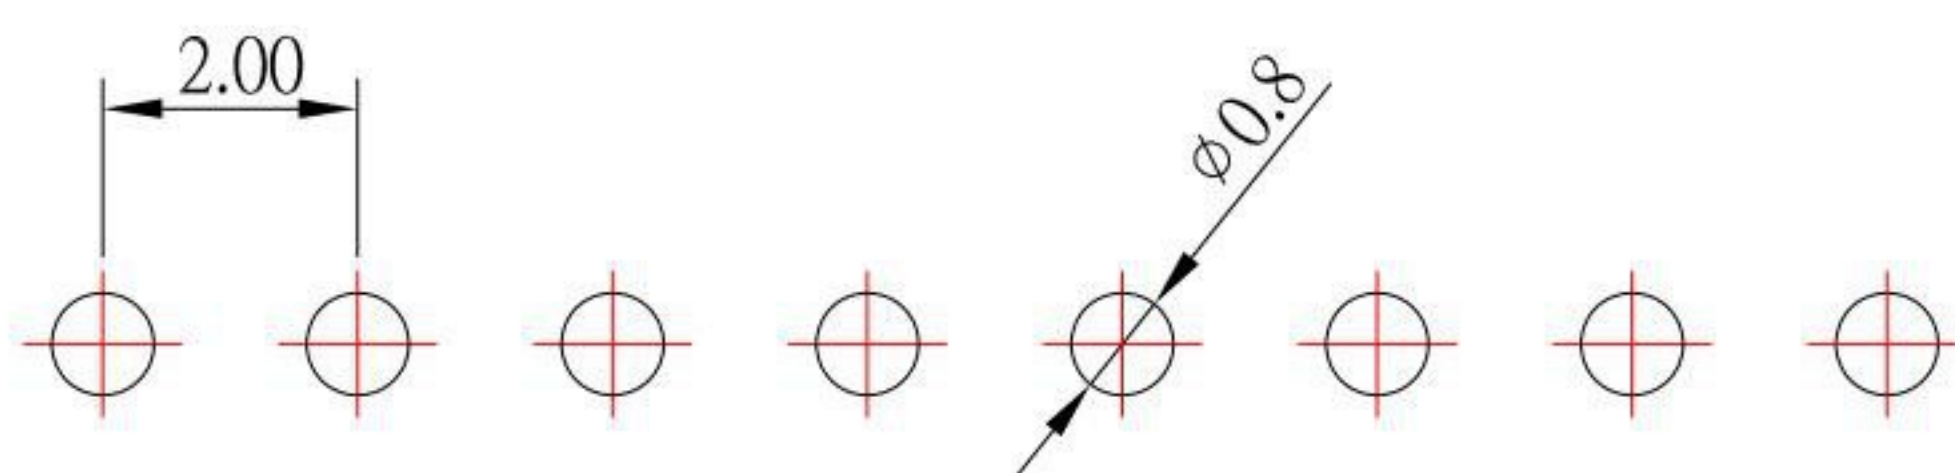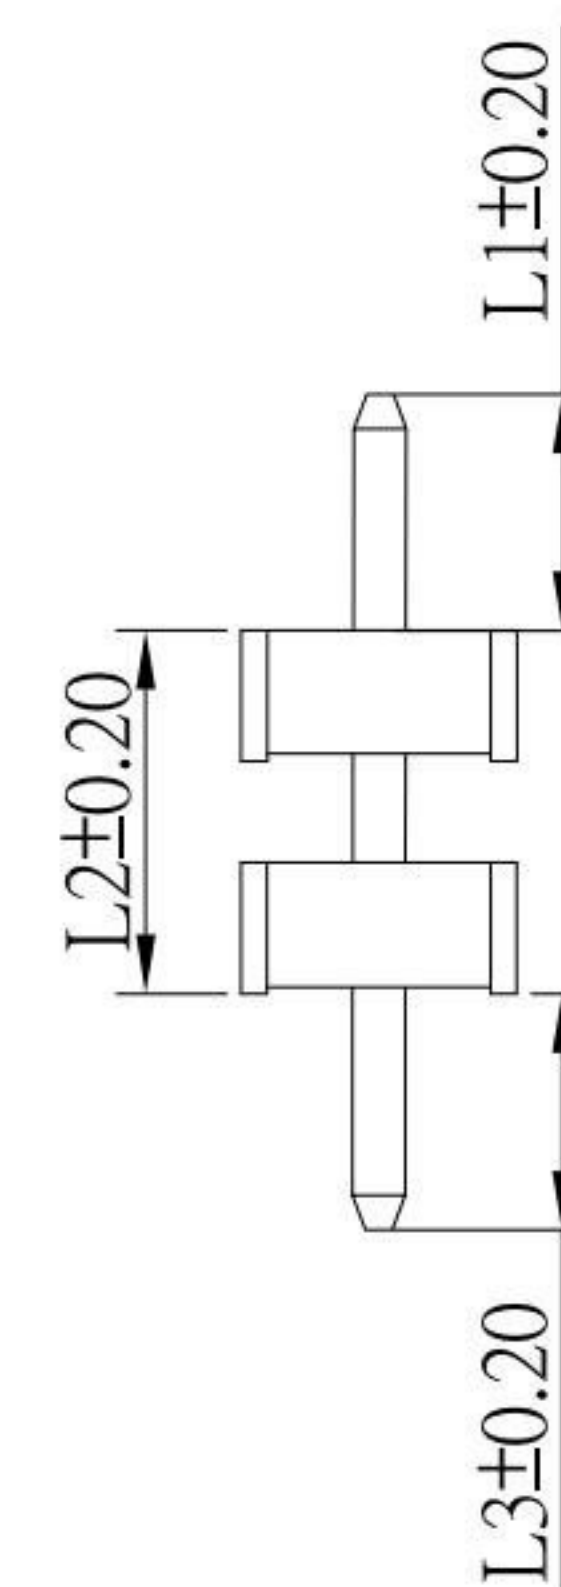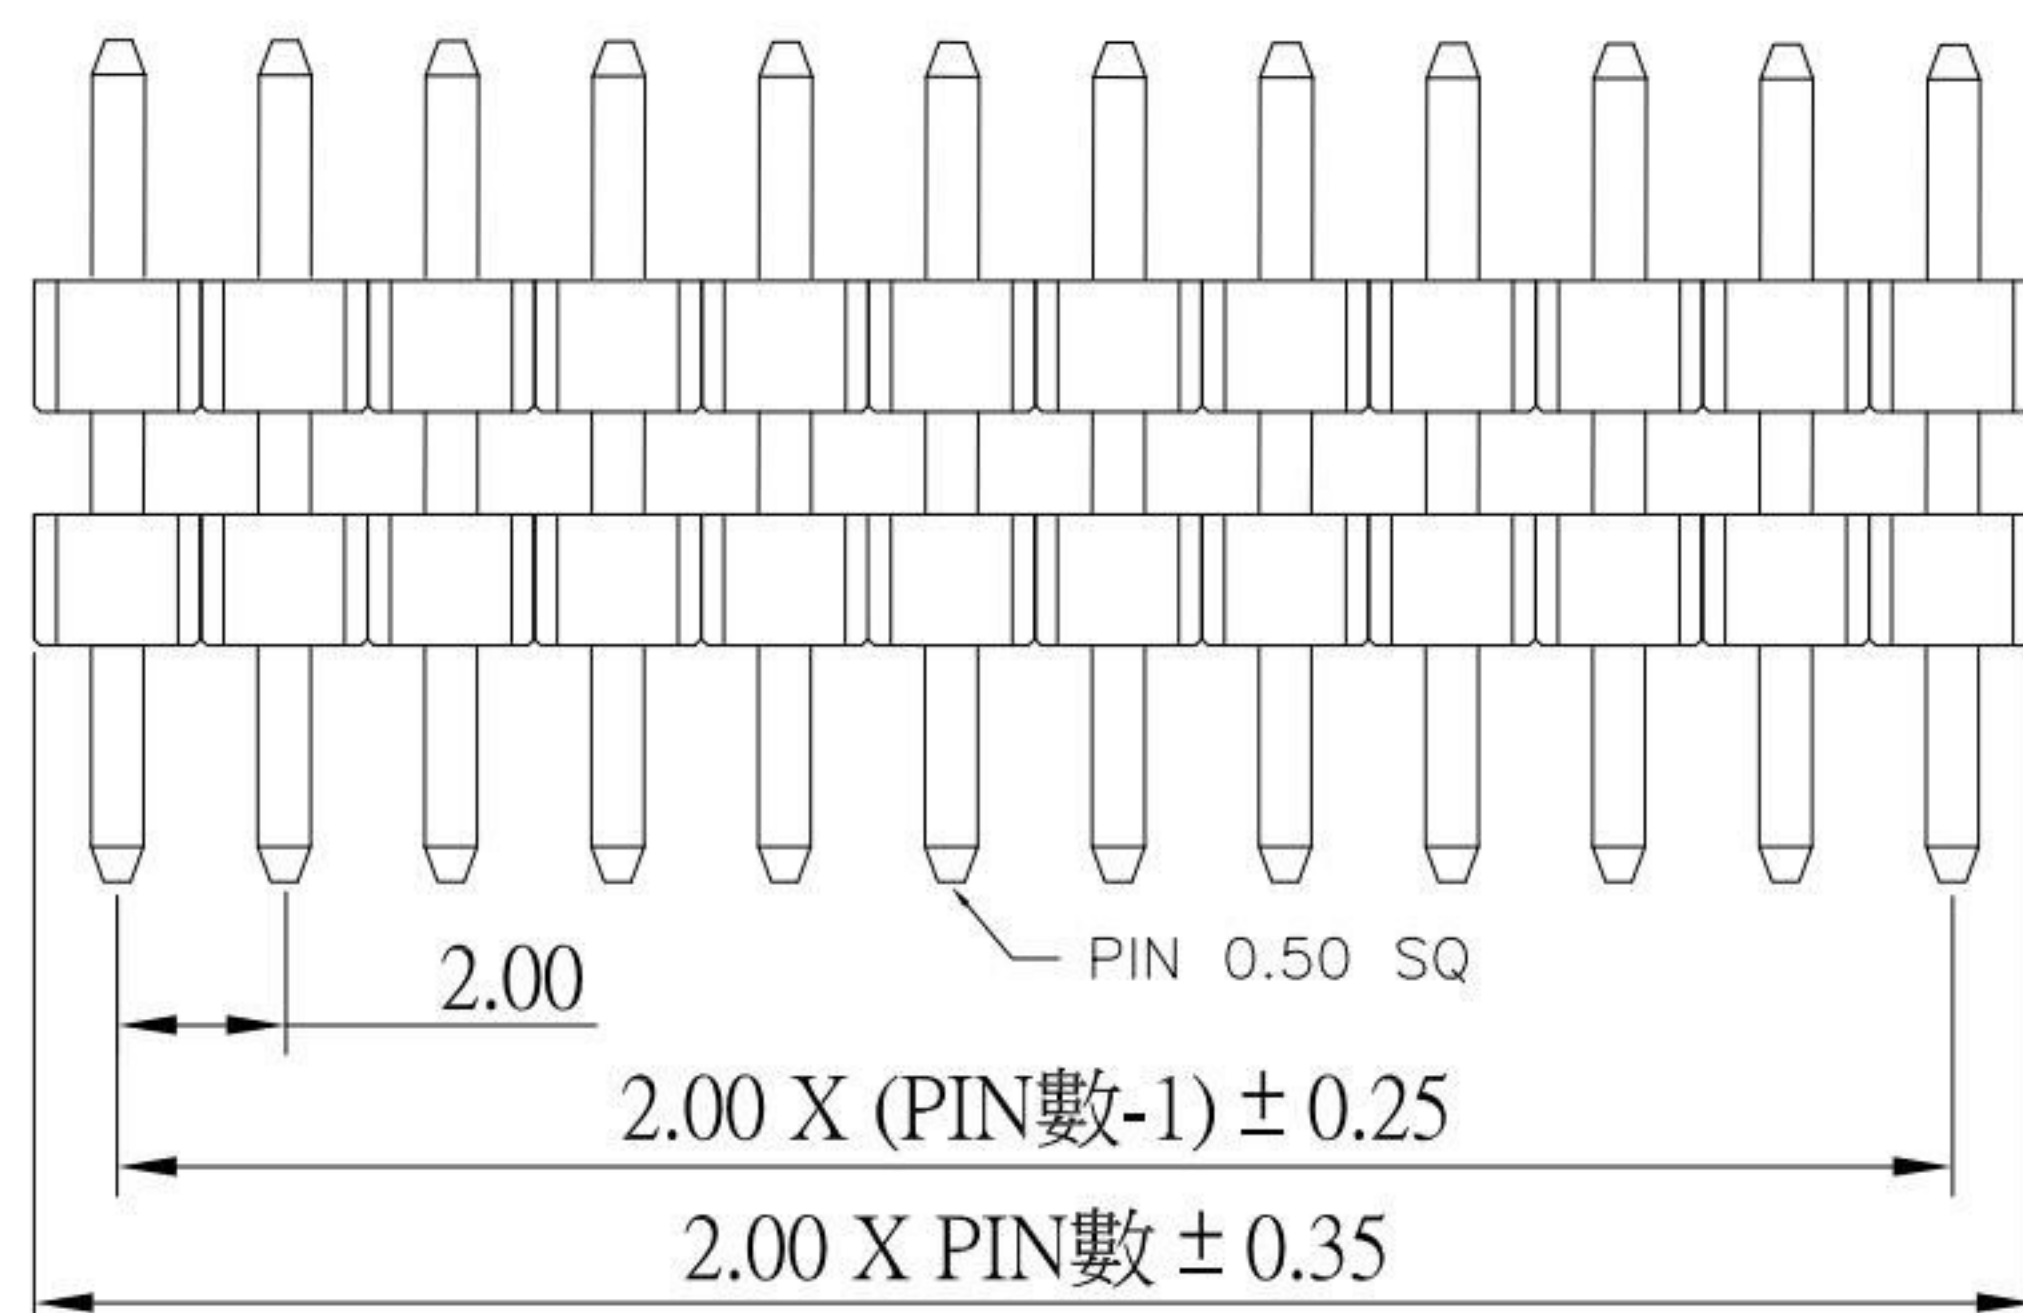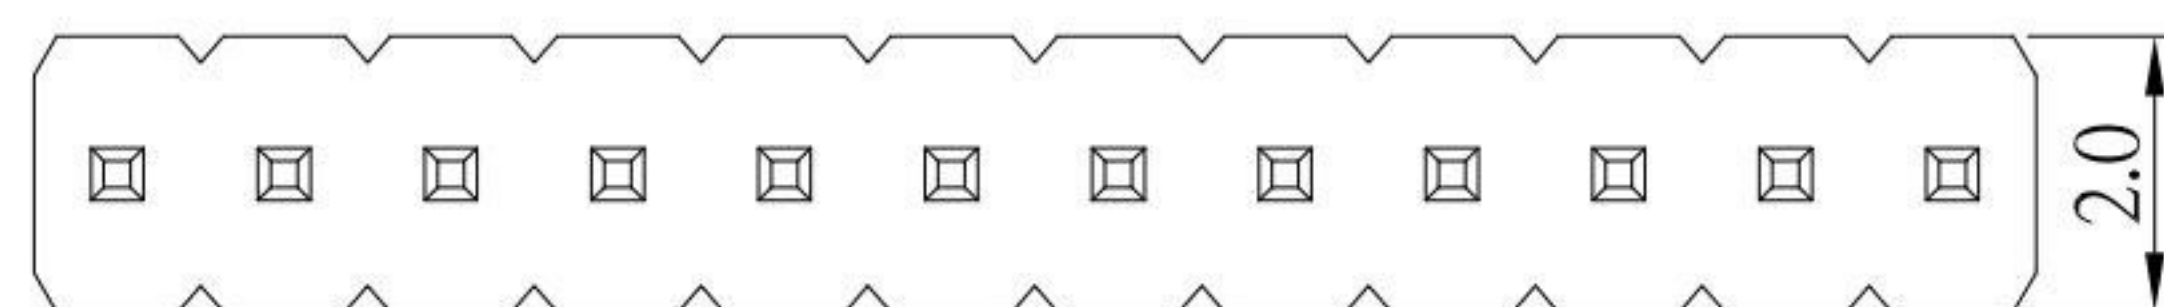

PCB LAYOUT

				科斯达电子科技有限公司 SWITCH CONNECTOR 全球 互联零组件制造企业 KSD ELECTRONIC TECHNOLOGY Co., LTD	DRAWN BY: Jack Lu		DATE: 07/18/19	MATL	TITLE: Pin Header		
					CHECKED BY: Jacky Chen		DATE: 07/18/19	FINISH	MODLE: 2.0排針 雙塑單排 180度		
				APPROVED BY: Tony Kao		DATE: 07/18/19	SCALE: 1:1	DWG NO.	PH-B21-31xxx-S304	SIZE: A4	
ITEM NO.	DESCRIPTION	DRAWN	DATE	TOLERANCE UNLESS OTHERWISE STATED:		3RD. ANGEL'S	UNITS	MM	PART NO.	PH-B21-31xxx-S304	VER: R4
				Up to 5	±0.2						
				Above 5 ~ 15	±0.3						
				Above 15 ~ 30	±0.4						
				Above 30 ~ 50	±0.5						
				Angle	±0.3°						