

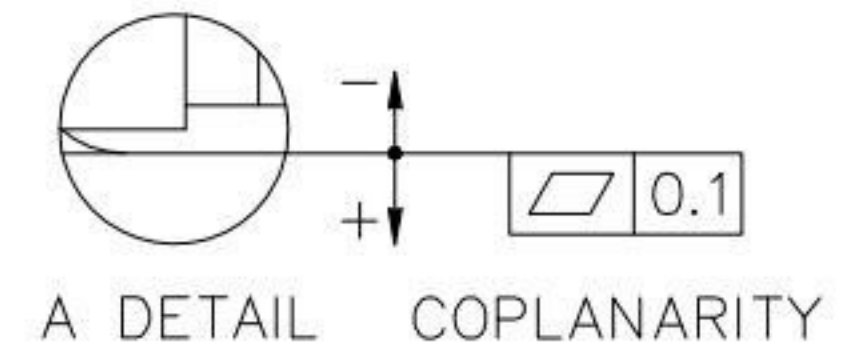


MODEL NO.	PJ-2966DT1	PJ-2965ADT1	PJ-2965BDT1	PJ-2964DT1
SCHEMATIC				

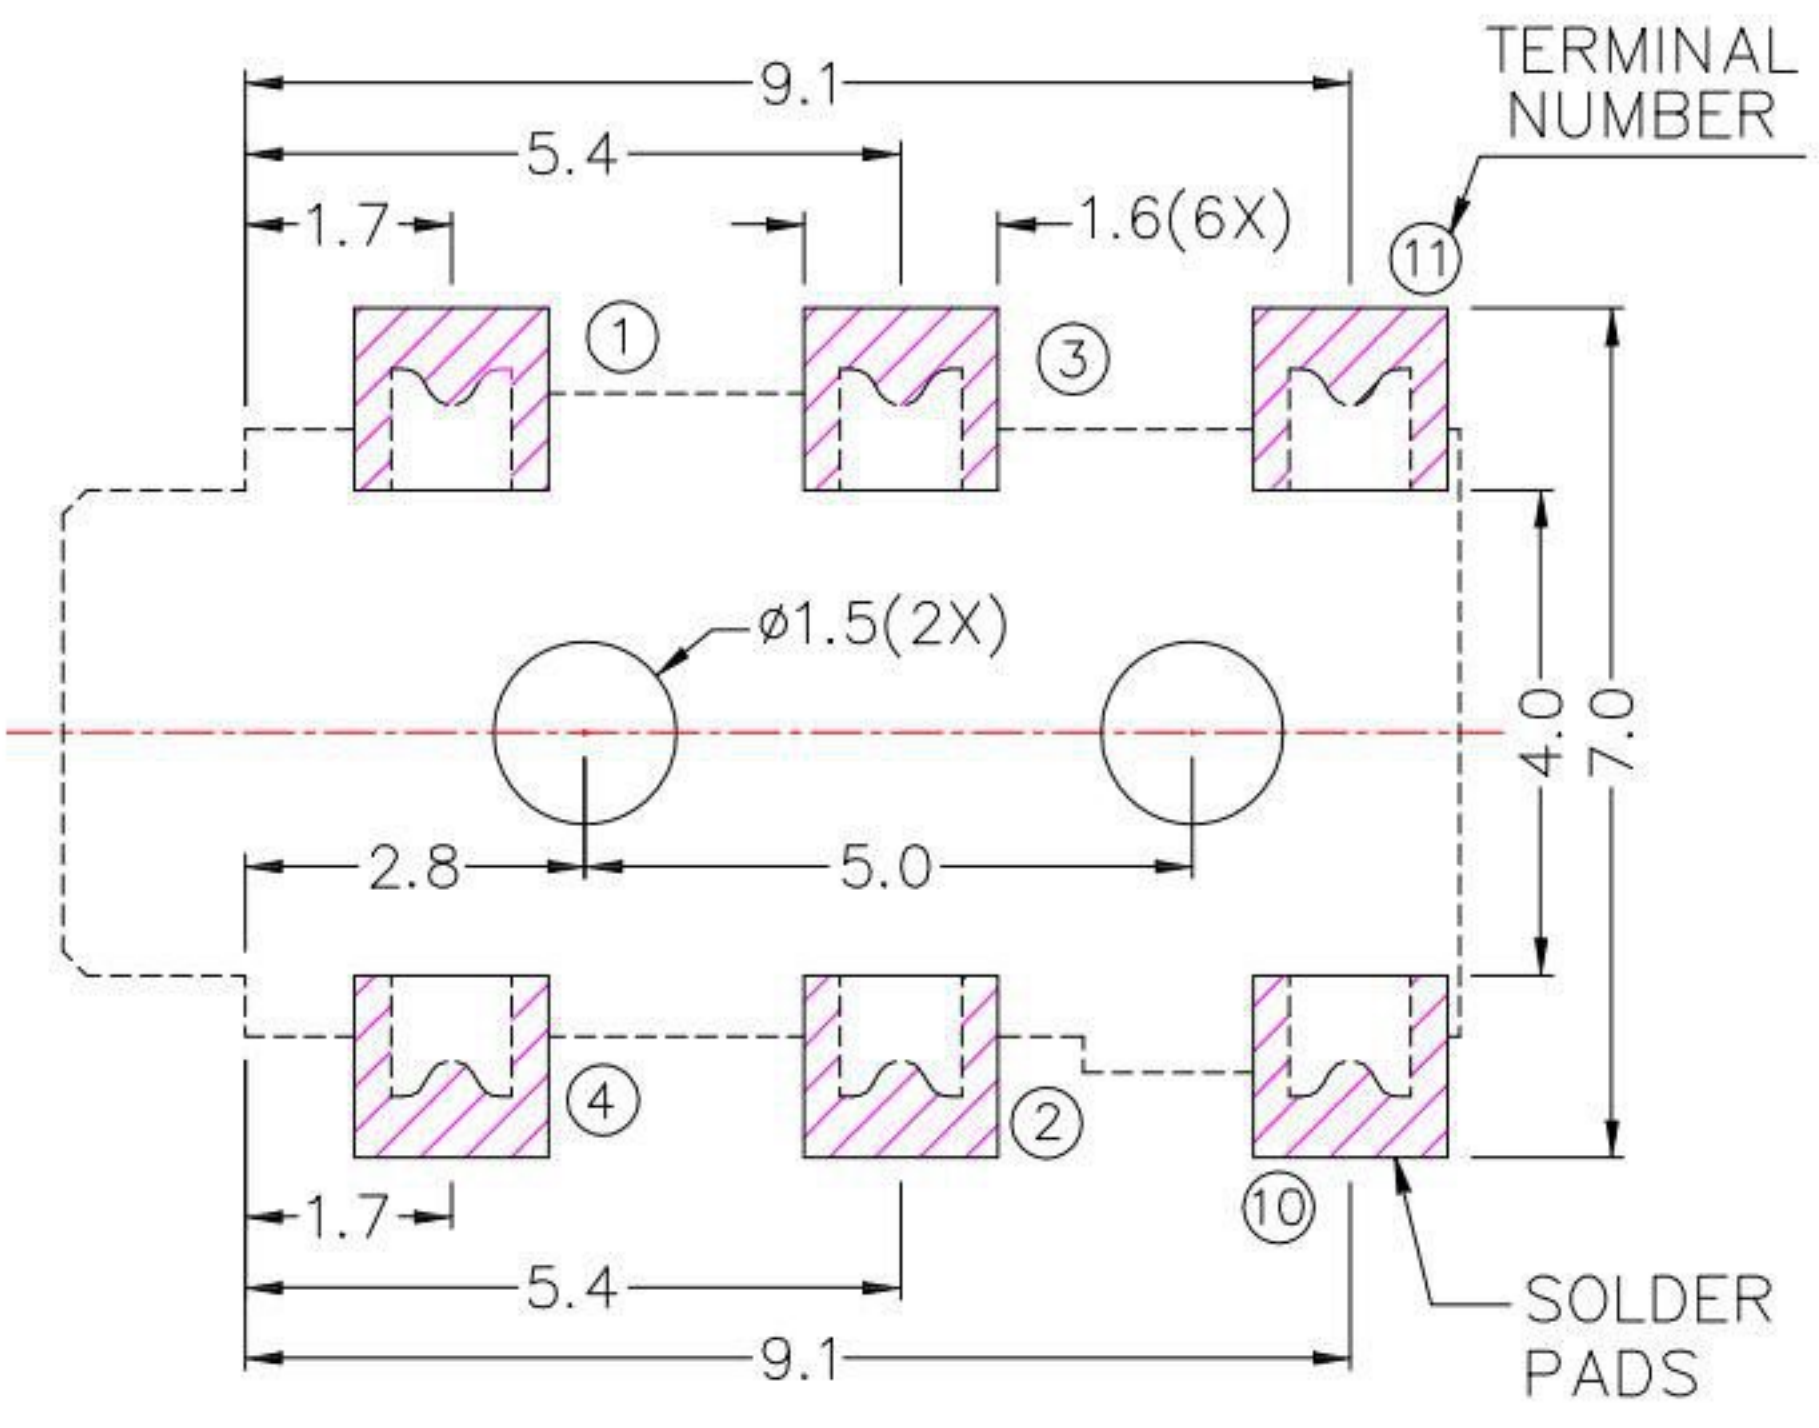

*** MATERIAL**

- TERMINAL 1 : PHOSPHOR BRONZE
- TERMINAL 2 : PHOSPHOR BRONZE
- TERMINAL 3 : PHOSPHOR BRONZE
- TERMINAL 4 : PHOSPHOR BRONZE
- TERMINAL 10 : PHOSPHOR BRONZE
- TERMINAL 11 : PHOSPHOR BRONZE
- HOUSING : PA6T
- TAPE : POLYIMIDE

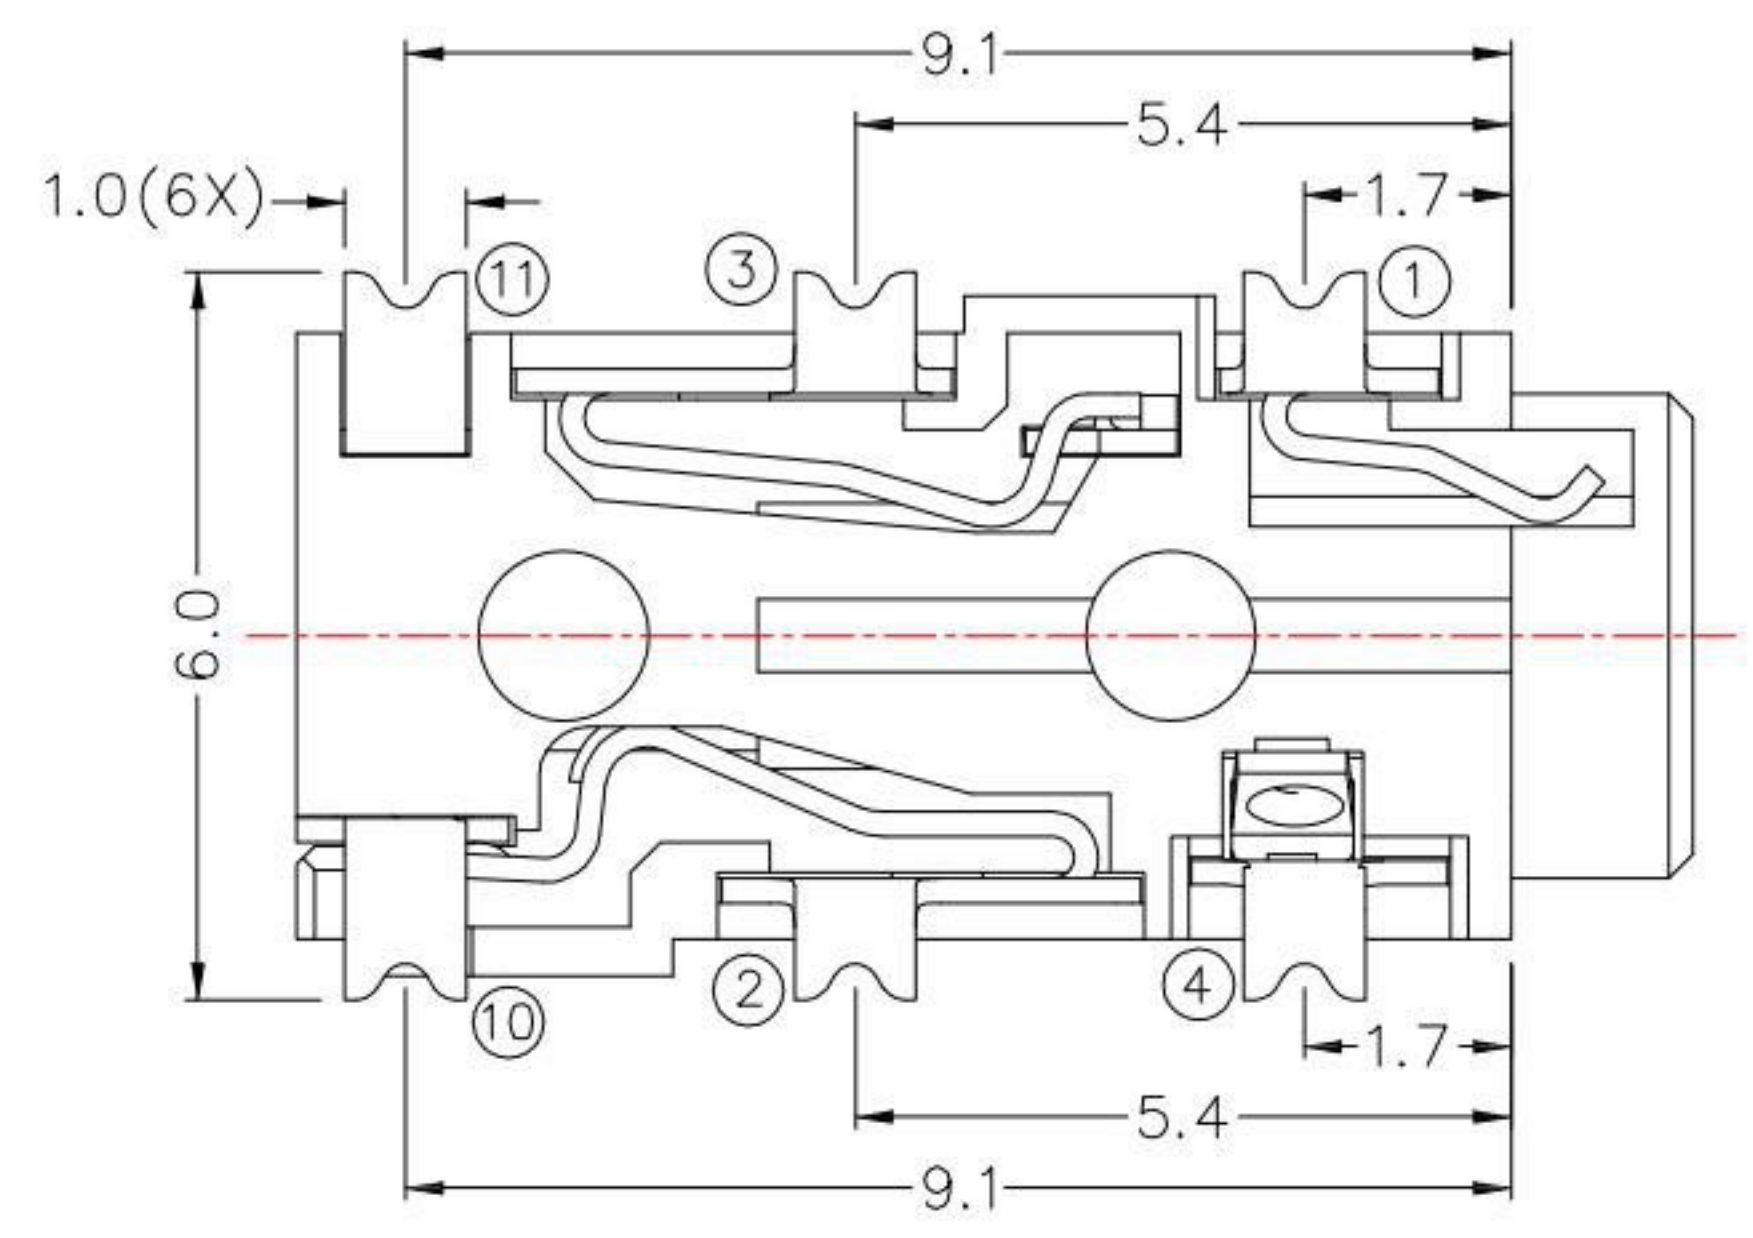

SPECIFICATION

1. Rating : DC 12V 1.0A
2. Contact resistance : $\leq 50m\Omega$
3. Insulation resistance : $\geq 100M\Omega$ (DC500V)
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. life test : 5,000 cycles

KSD 科斯达电子科技有限公司
 SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD
 全球 互联网 零组件 制造企业

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2	3RD. ANGEL'S	UNITS	MM
	Above 5 ~ 15 ±0.3			
	Above 15 ~ 30 ±0.4			
	Above 30 ~ 50 ±0.5			
	Angle ±0.3			

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	11/05/14			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	11/05/14			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-296xDT1
Tony Kao	11/05/14	1:1		
		SHEET NO.	PART NO.	PJ-296xDT1
		1 of 1		

1	更新為A0版	Jack	110514
ITEM NO.	DESCRIPTION	DRAWN	DATE