


SCHEMATIC

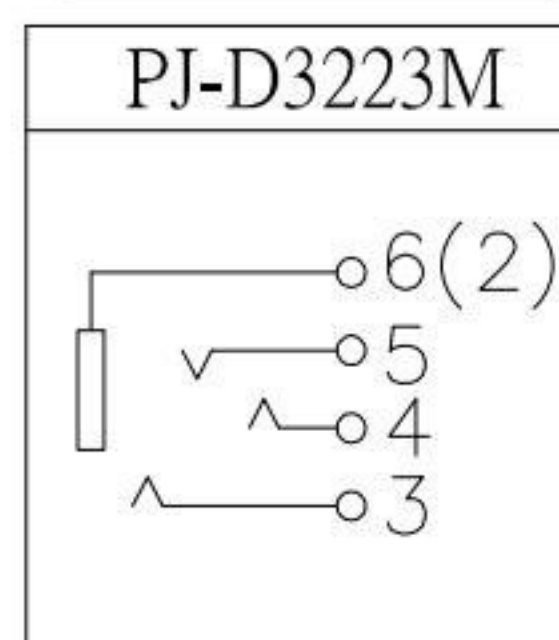

SPECIFICATION

1. Rating : DC 30V , 1.0A
2. Contact resistance : $\leq 30m\Omega$
3. Insulation resistance : $\geq 100M\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 5-30N
6. life test : 5,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
⑥	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
⑤	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
④	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
③	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
②	AXIS SUPPORT	1	BRASS	Ni-Plating
①	HOUSING	1	PBT	

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	更新尺寸	Jack	102121
1	更新材質	Jack	102021

KSD 科斯达电子科技有限公司
 SWITCH CONNECTOR 全球 互聯零組件製造企業
 KSD ELECTRONIC TECHNOLOGY Co., LTD

TOLERANCE UNLESS OTHERWISE STATED :
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	10/21/21		MODLE	3.5 PHONE JACK 4 pole 攻牙 焊線式
CHECKED BY:	DATE	FINISH	DWG NO.	PJ-D3223M-S124
Jacky Chen	10/21/21		PART NO.	PJ-D3223M-S124
APPROVED BY:	DATE	SCALE	SHEET NO.	1 of 1
Tony Kao	10/21/21	1 : 1		