


P.C.B LAYOUT MOUNTING PATTERN

SCHEMATIC (NON-SHORTING)

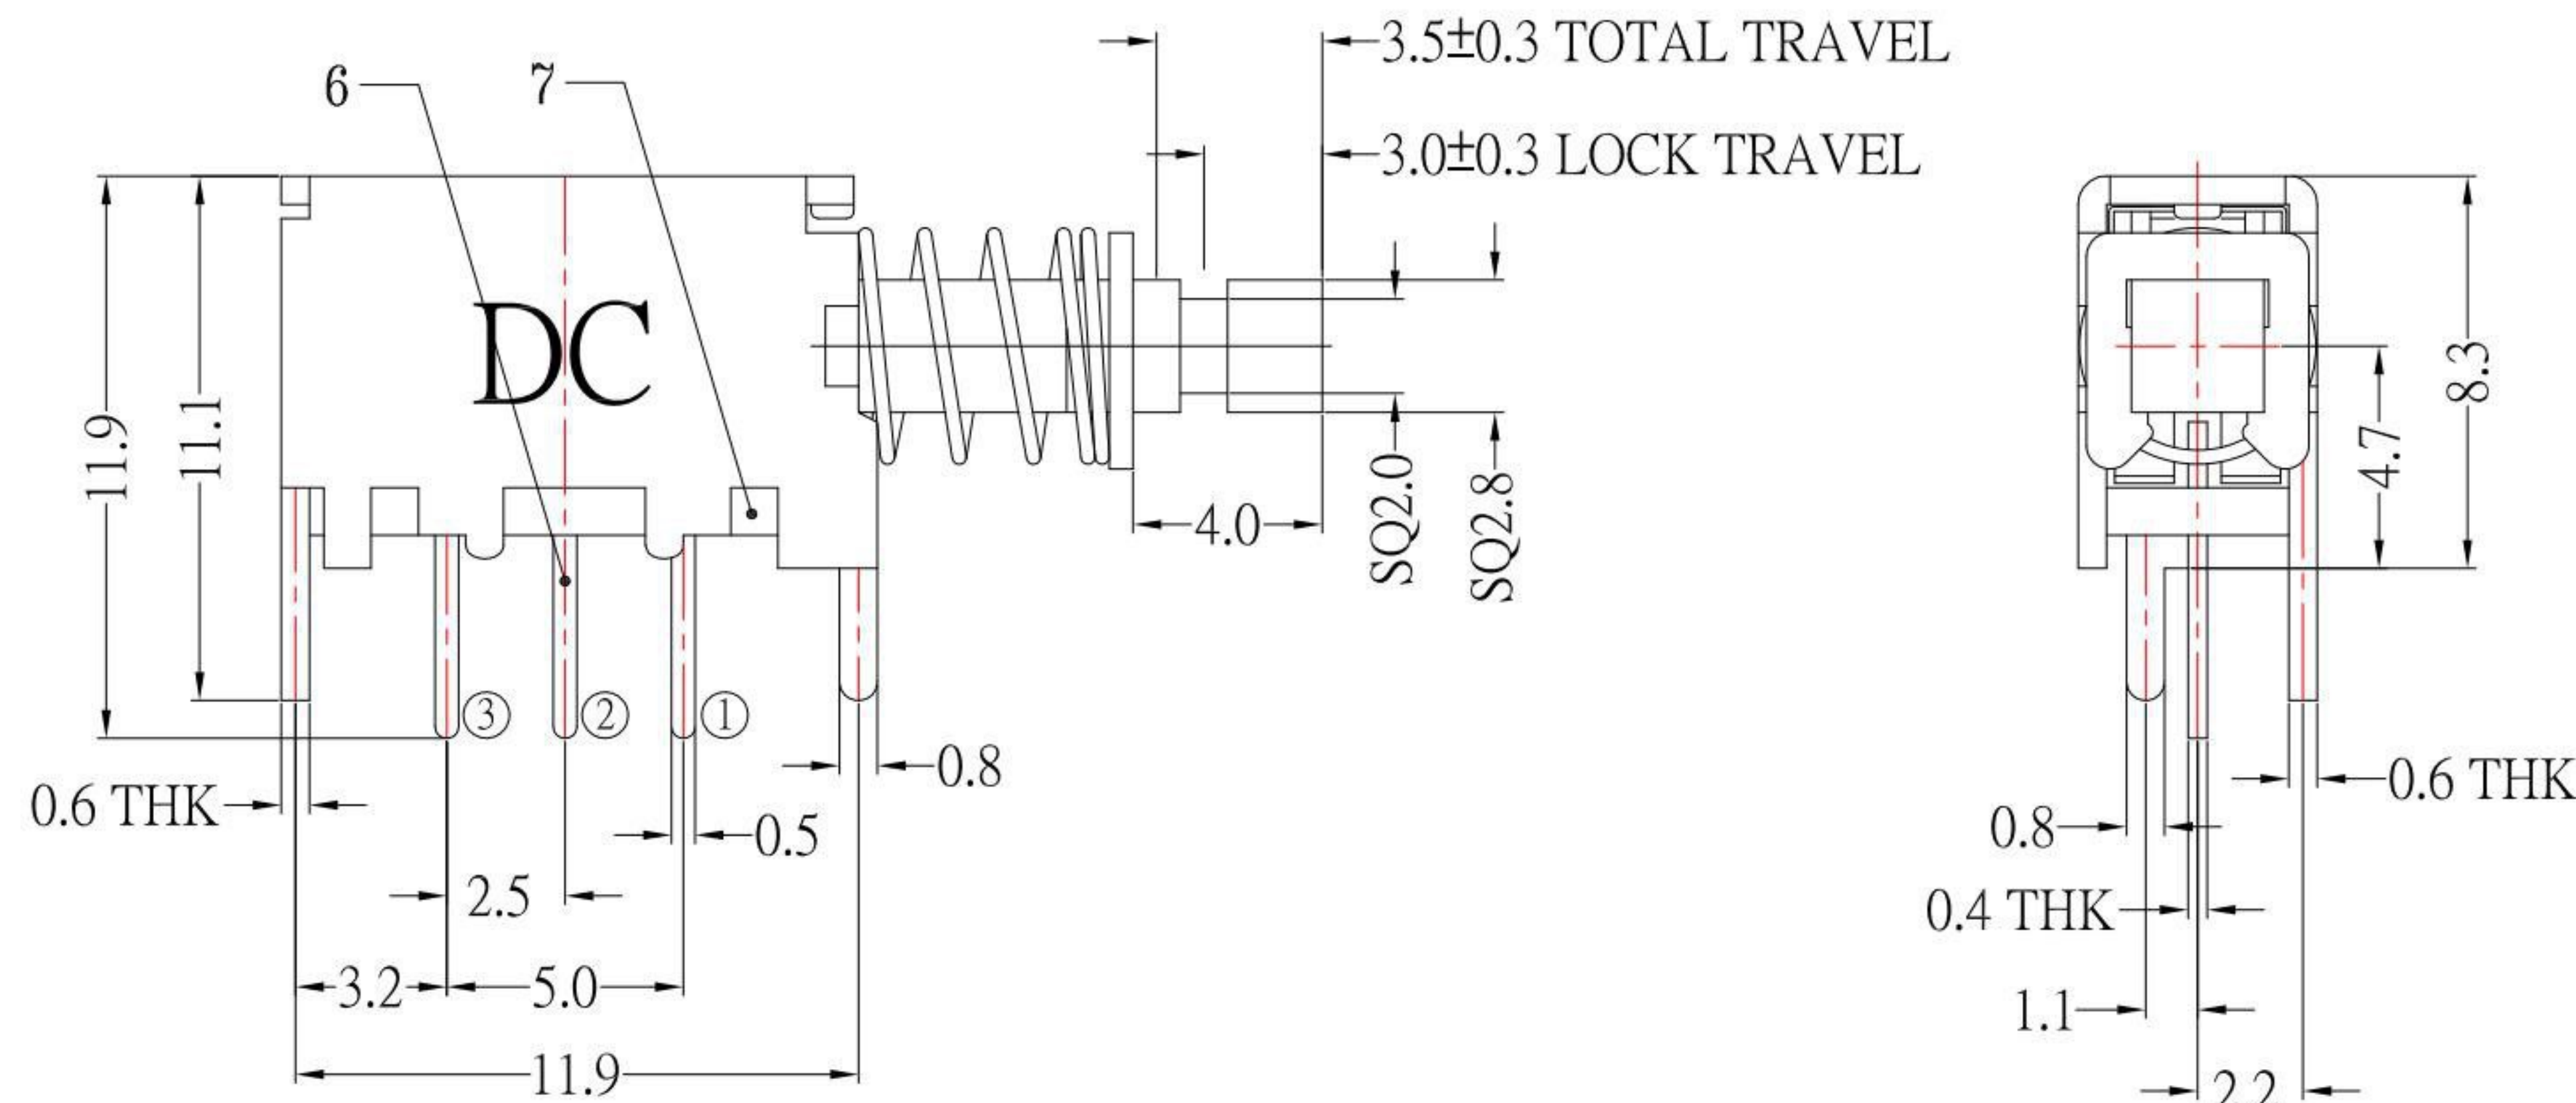

SPECIFICATIONS

- 1. Rating : DC50V 0.3A
- 2. Circuit : 1P2T
- 3. Timing : Non-Shorting
- 4. Operating force : 250 ± 100gf
- 5. Life test : 10,000 cycles
- 6. Operating Mode : Self-Lock

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
9	Contact Clip	1	Phosphor Bronze	Ag-Plating
8	Spring Plate	1	PBS	Natural
7	Base	1	Phenolic Resin	Natural
6	Terminal	1	Brass	Ag-Plating
5	Knob	1	PA66	Blue
4	Block	1	Stainless Steel	Ni-Plating
3	Spring	1	Steel Wire	Ni-Plating
2	Cam Strick	1	PBS Wire	Natural
1	Frame	1	Spcc	Ni-Plating

ITEM NO.	DESCRIPTION	DRAWN	DATE
6	標示pin編號	Jack	063015
5	更新P.C.B LAYOUT	Jack	061515
4	更新材質	Jack	052915
3	新增SPEC	Jack	052515
2	新增Operating Mode	Jack	072514
1	新增"DC"圖樣	Jack	081513

KSD 科斯达电子科技有限公司
 SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD
 全球 互聯零組件 制造企业

TOLERANCE UNLESS OTHERWISE STATED:
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE
Jack Lu	06/30/15
CHECKED BY:	DATE
Jacky Chen	06/30/15
APPROVED BY:	DATE
Tony Kao	06/30/15

MAT'L	TITLE	SWITCH
FINISH	MODLE	PUSH SWITCH 藍柄 自鎖式
SCALE 1:1	DWG NO.	PS-12E05-S191
SHEET NO. 1 of 1	PART NO.	PS-12E05-S191

SIZE A4
VER R6