






DIMENSIONS

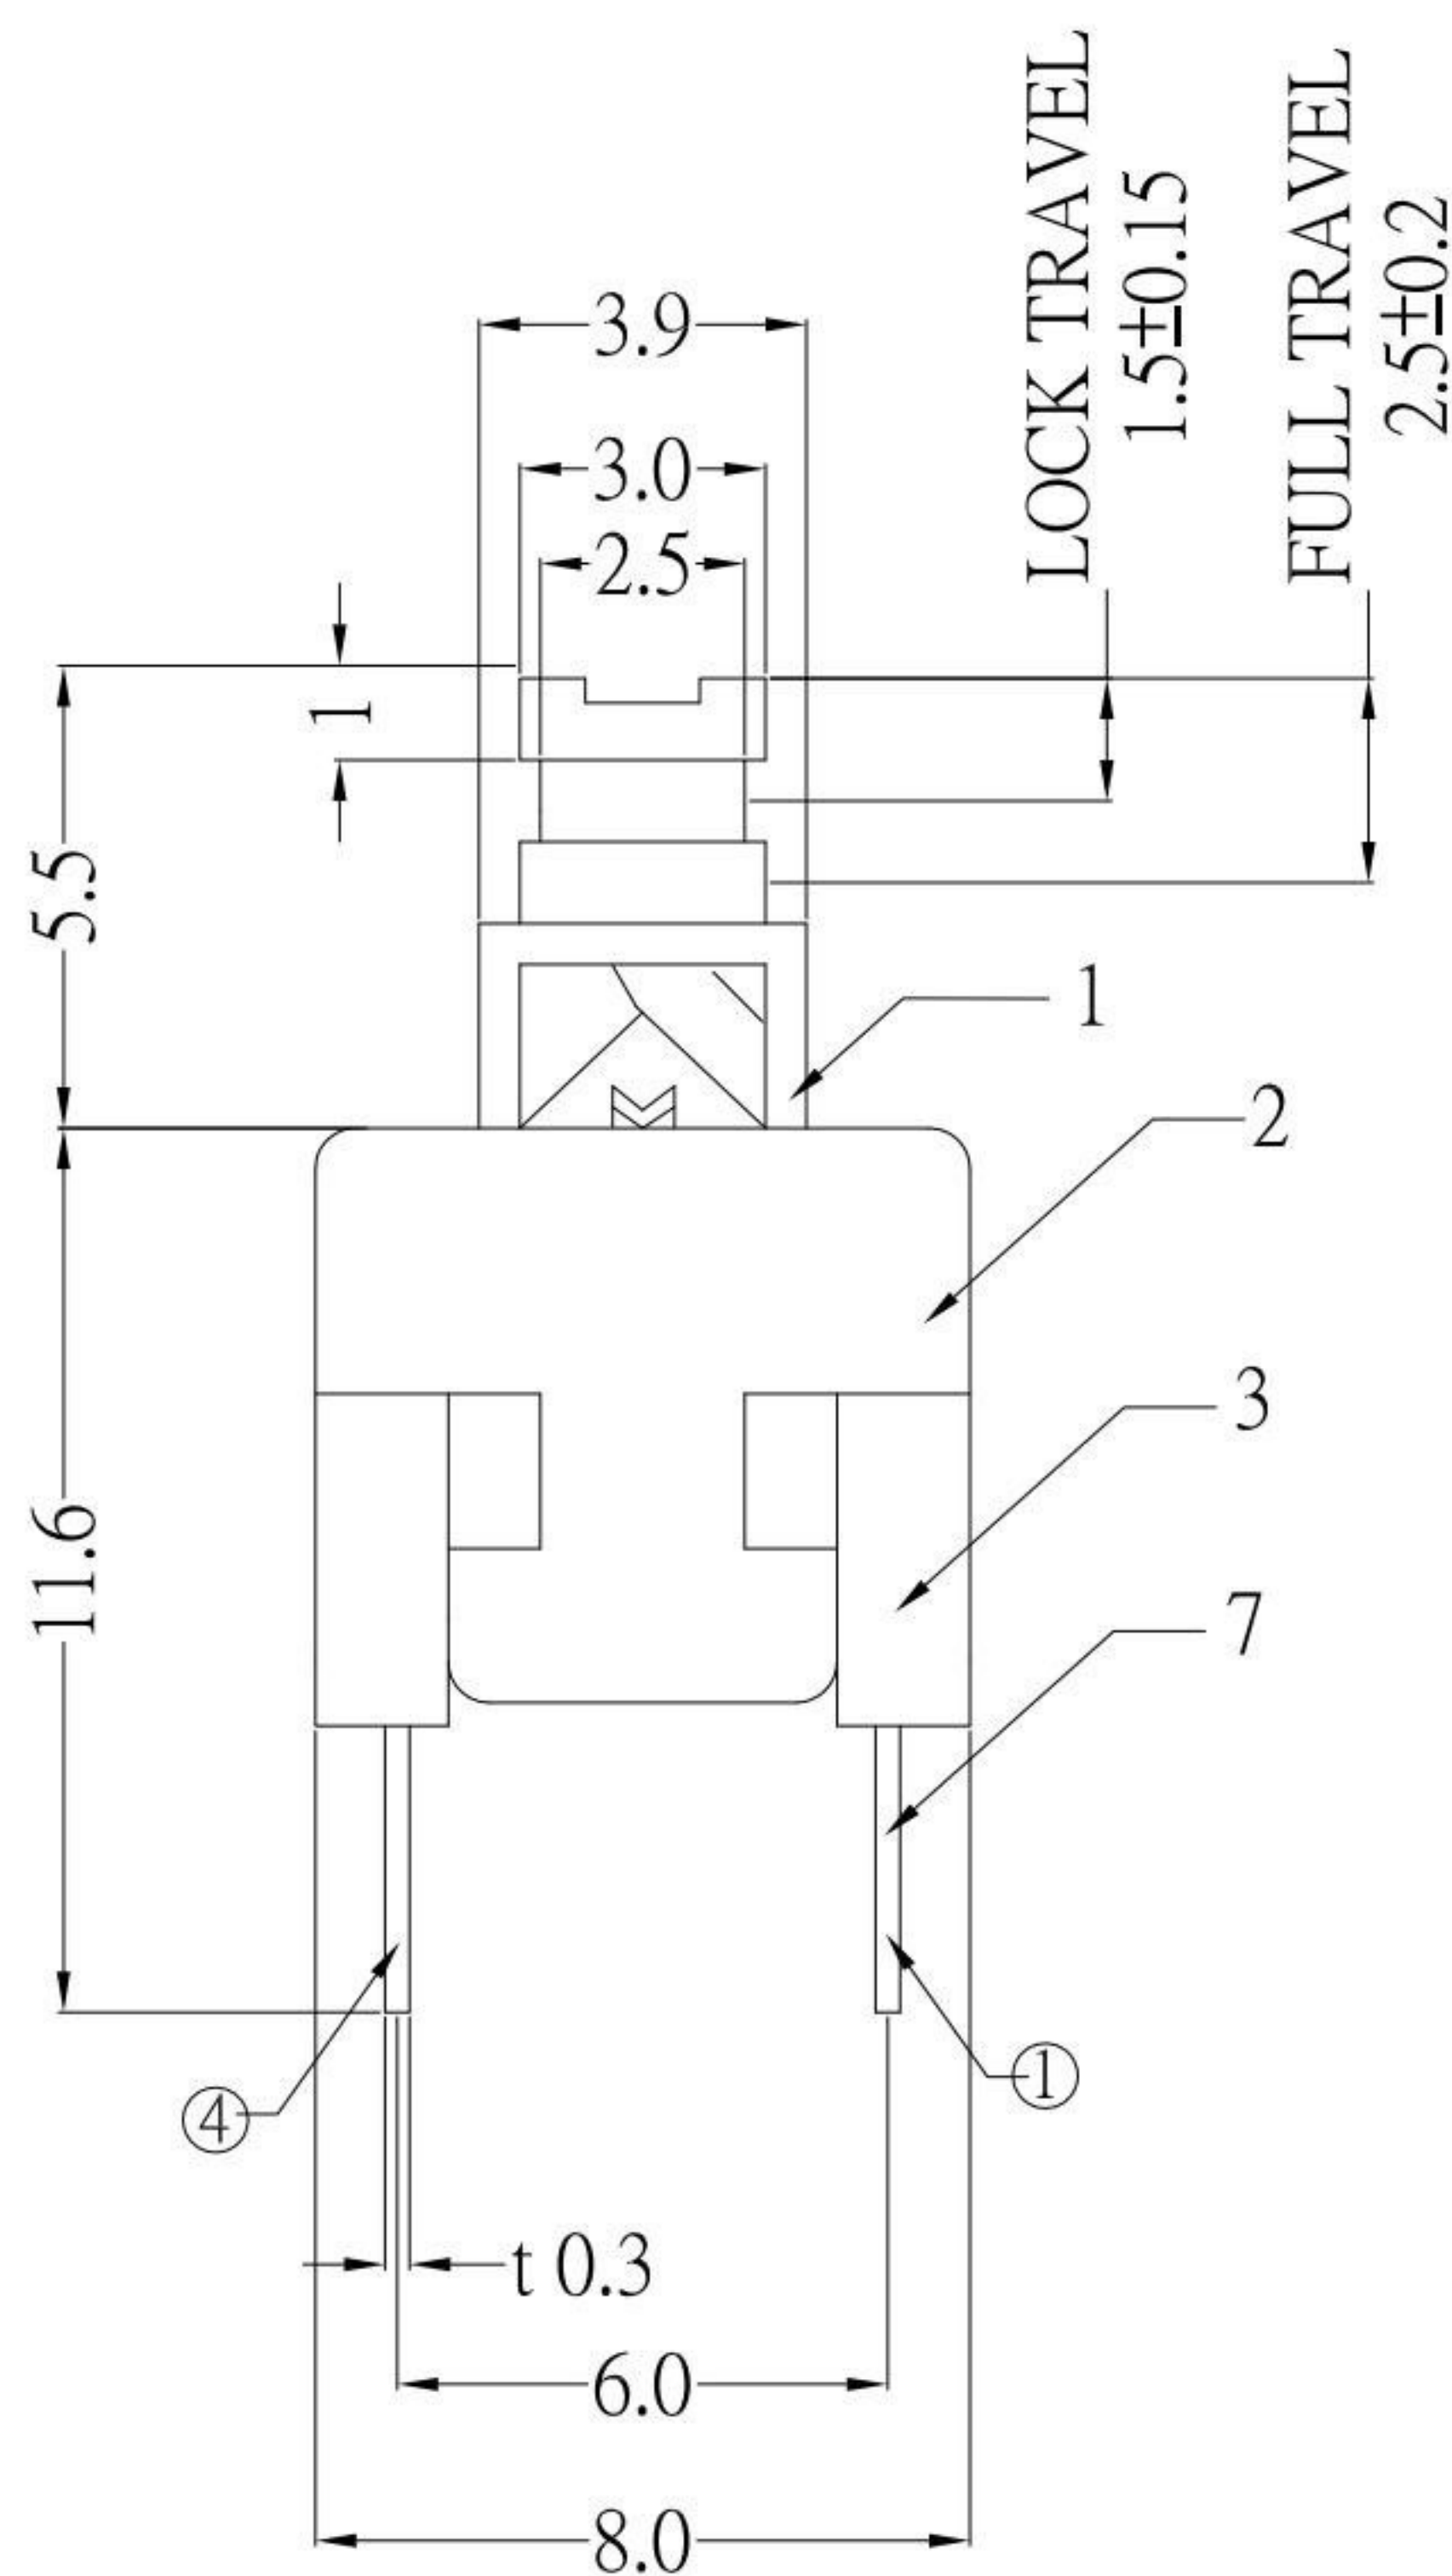


NOTE:

- 1. PS-D15L-S191: SELF- LOCK ;
- 2. PS-D15NL-S191:NON-LOCK

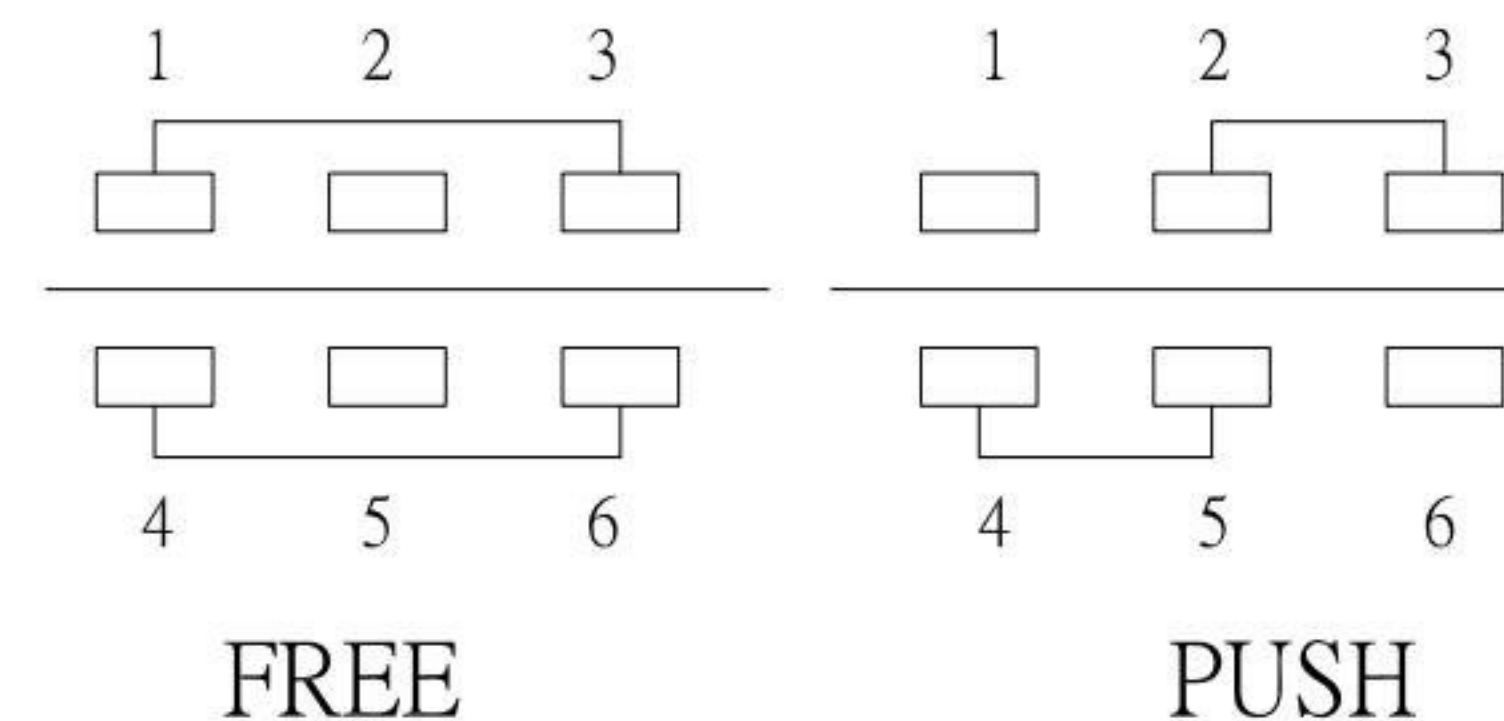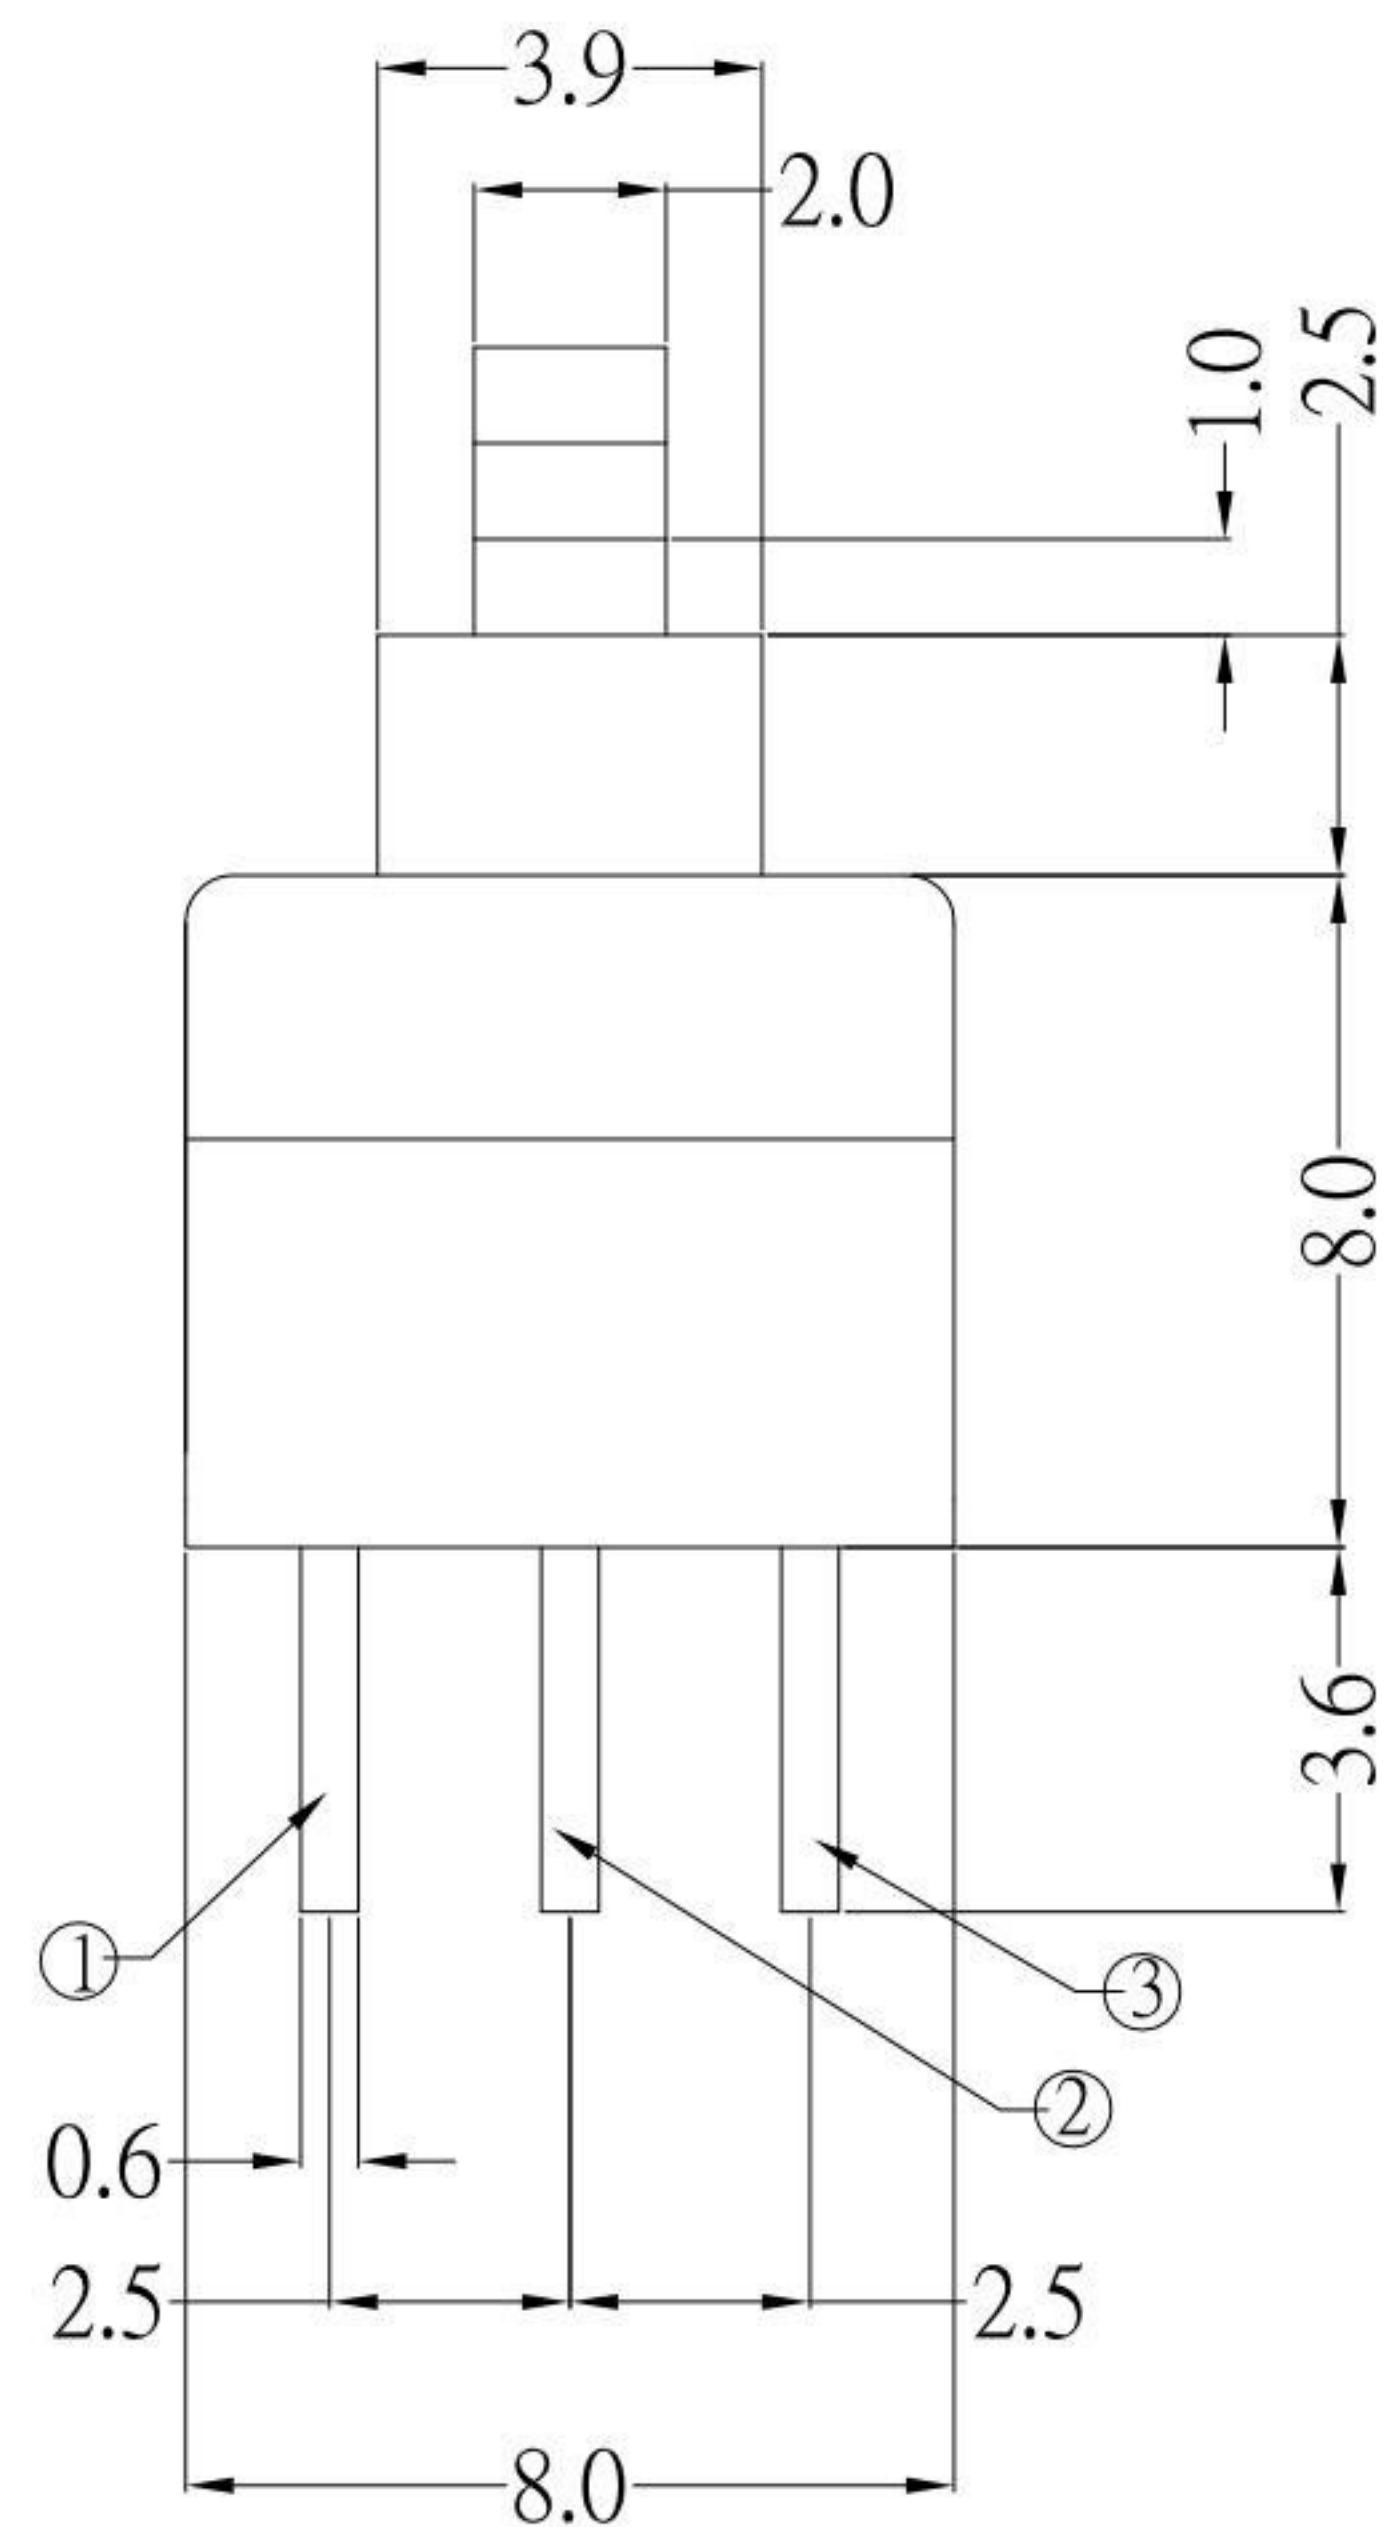

SCHEMATIC

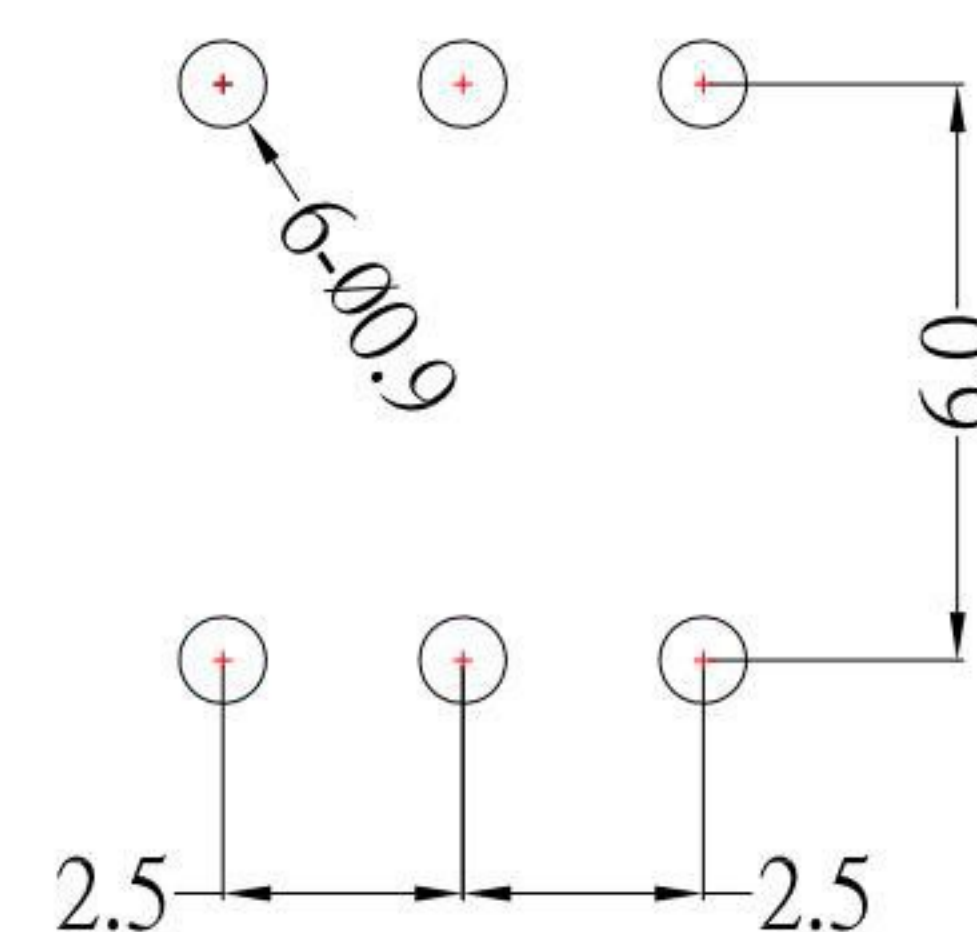

SPECIFICATIONS

- 1.Rating : DC 30V 0.2A
- 2.Circuit : 2P2T
- 3.Timing : Non-Shorting
- 4.Operating force : 180 ± 50gf
- 5.Life test : 10,000 cycles

P.C.B MOUNTING PATTERN

NO.	DESCRIPTION	QTY	MATERIAL	REMARK
7	TERMINAL	6	BRASS	Ag-Plated
6	CONTACT	1	PHOSPHOR BRONZE	Ag-Plated
5	SPRING	1	SUS	NATURAL
4	CAM STICK	1	SUS WIRE	NATURAL
3	CASE	1	PBT	BLACK
2	COVER	1	POM	WHITE
1	KNOB	1	POM	BLUE

6	新增SPEC	Jack	102315
5	更新SCHEMATIC	Jack	040814
4	更新PIN編號	Jack	083013
3	尺寸更新	Jack	061313
2	新增尺寸	Jack	060713
1	更新材質	Jack	052813
ITEM NO.	DESCRIPTION	DRAWN	DATE

KSD 科斯达电子科技有限公司
 SWITCH CONNECTOR 全球 互聯零組件製造企業
 KSD ELECTRONIC TECHNOLOGY Co., LTD

TOLERANCE UNLESS OTHERWISE STATED :
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	10/23/15		MODLE	PUSH SWITCH
CHECKED BY:	DATE	FINISH	DWG NO.	PS-D15x-S191
Jacky Chen	10/23/15		PART NO.	PS-D15x-S191
APPROVED BY:	DATE	SCALE	1 : 1	
Tony Kao	10/23/15	SHEET NO.	1 of 1	

SIZE A4
VER A3