


P.C.B LAYOUT

PS-D16Sx-S313

L	SelfLock
NL	Nonlock

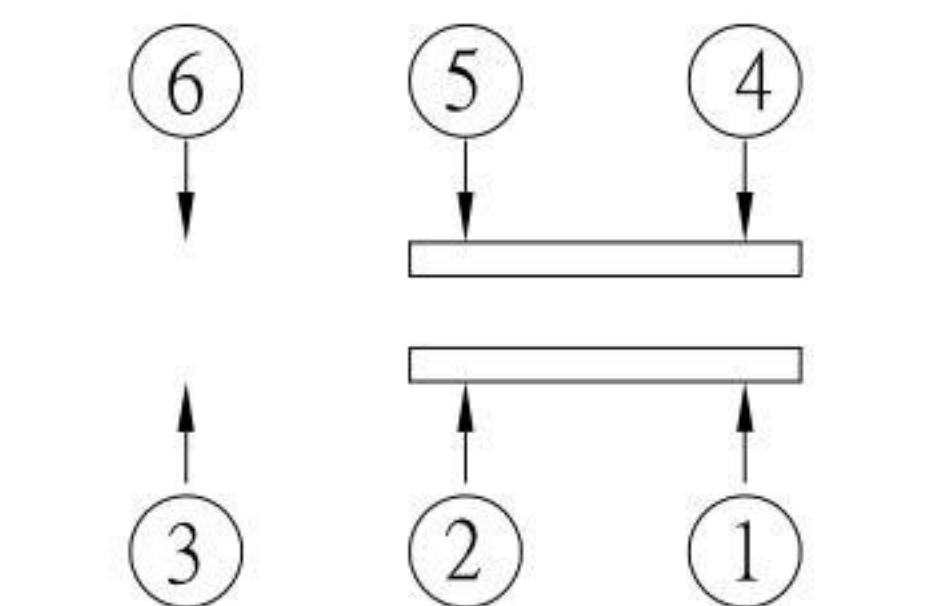

CIRCUIT DIAGRAM

SPECIFICATIONS:

- 1.RATING: 12V DC / 0.2A
- 2.CIRCUIT: 2C-2P
- 3.TIMING: NON-SHORTING
- 4.OPERATING FORCE: 250±100 gf

NO.	PARTS	MATERIALS	QTY	FINISH
7	CONTACT	PHOSPHOR BRONZE	1	NATURAL
6	SPRING	SUS	1	NATURAL
5	LOCK PIN	SUS	1	Ni PLATED
4	TERMINAL	BRASS	1	Ag PLATED OVER Ni
3	COVER	PPA	1	BLACK
2	CASE	PPA	1	BLACK
1	KNOB	PA6T	1	WHITE

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	新增尺寸和接腳編號及更新材質	Jack	111120
1	更新材質	Jack	111516

KSD 科斯达电子科技有限公司
 SWITCH CONNECTOR 全球 互聯零組件 制造企业
 KSD ELECTRONIC TECHNOLOGY Co., LTD

TOLERANCE UNLESS OTHERWISE STATED:
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	11/11/20		MODLE	PUSH SWITCH
CHECKED BY:	DATE	FINISH	DWG NO.	PS-D16Sx-S313
Jacky Chen	11/11/20		PART NO.	PS-D16Sx-S313
APPROVED BY:	DATE	SCALE	1 of 1	
Tony Kao	11/11/20	SHEET NO.		

SIZE A4
VER R2