


PCB LAYOUT MOUNTING PATTERN

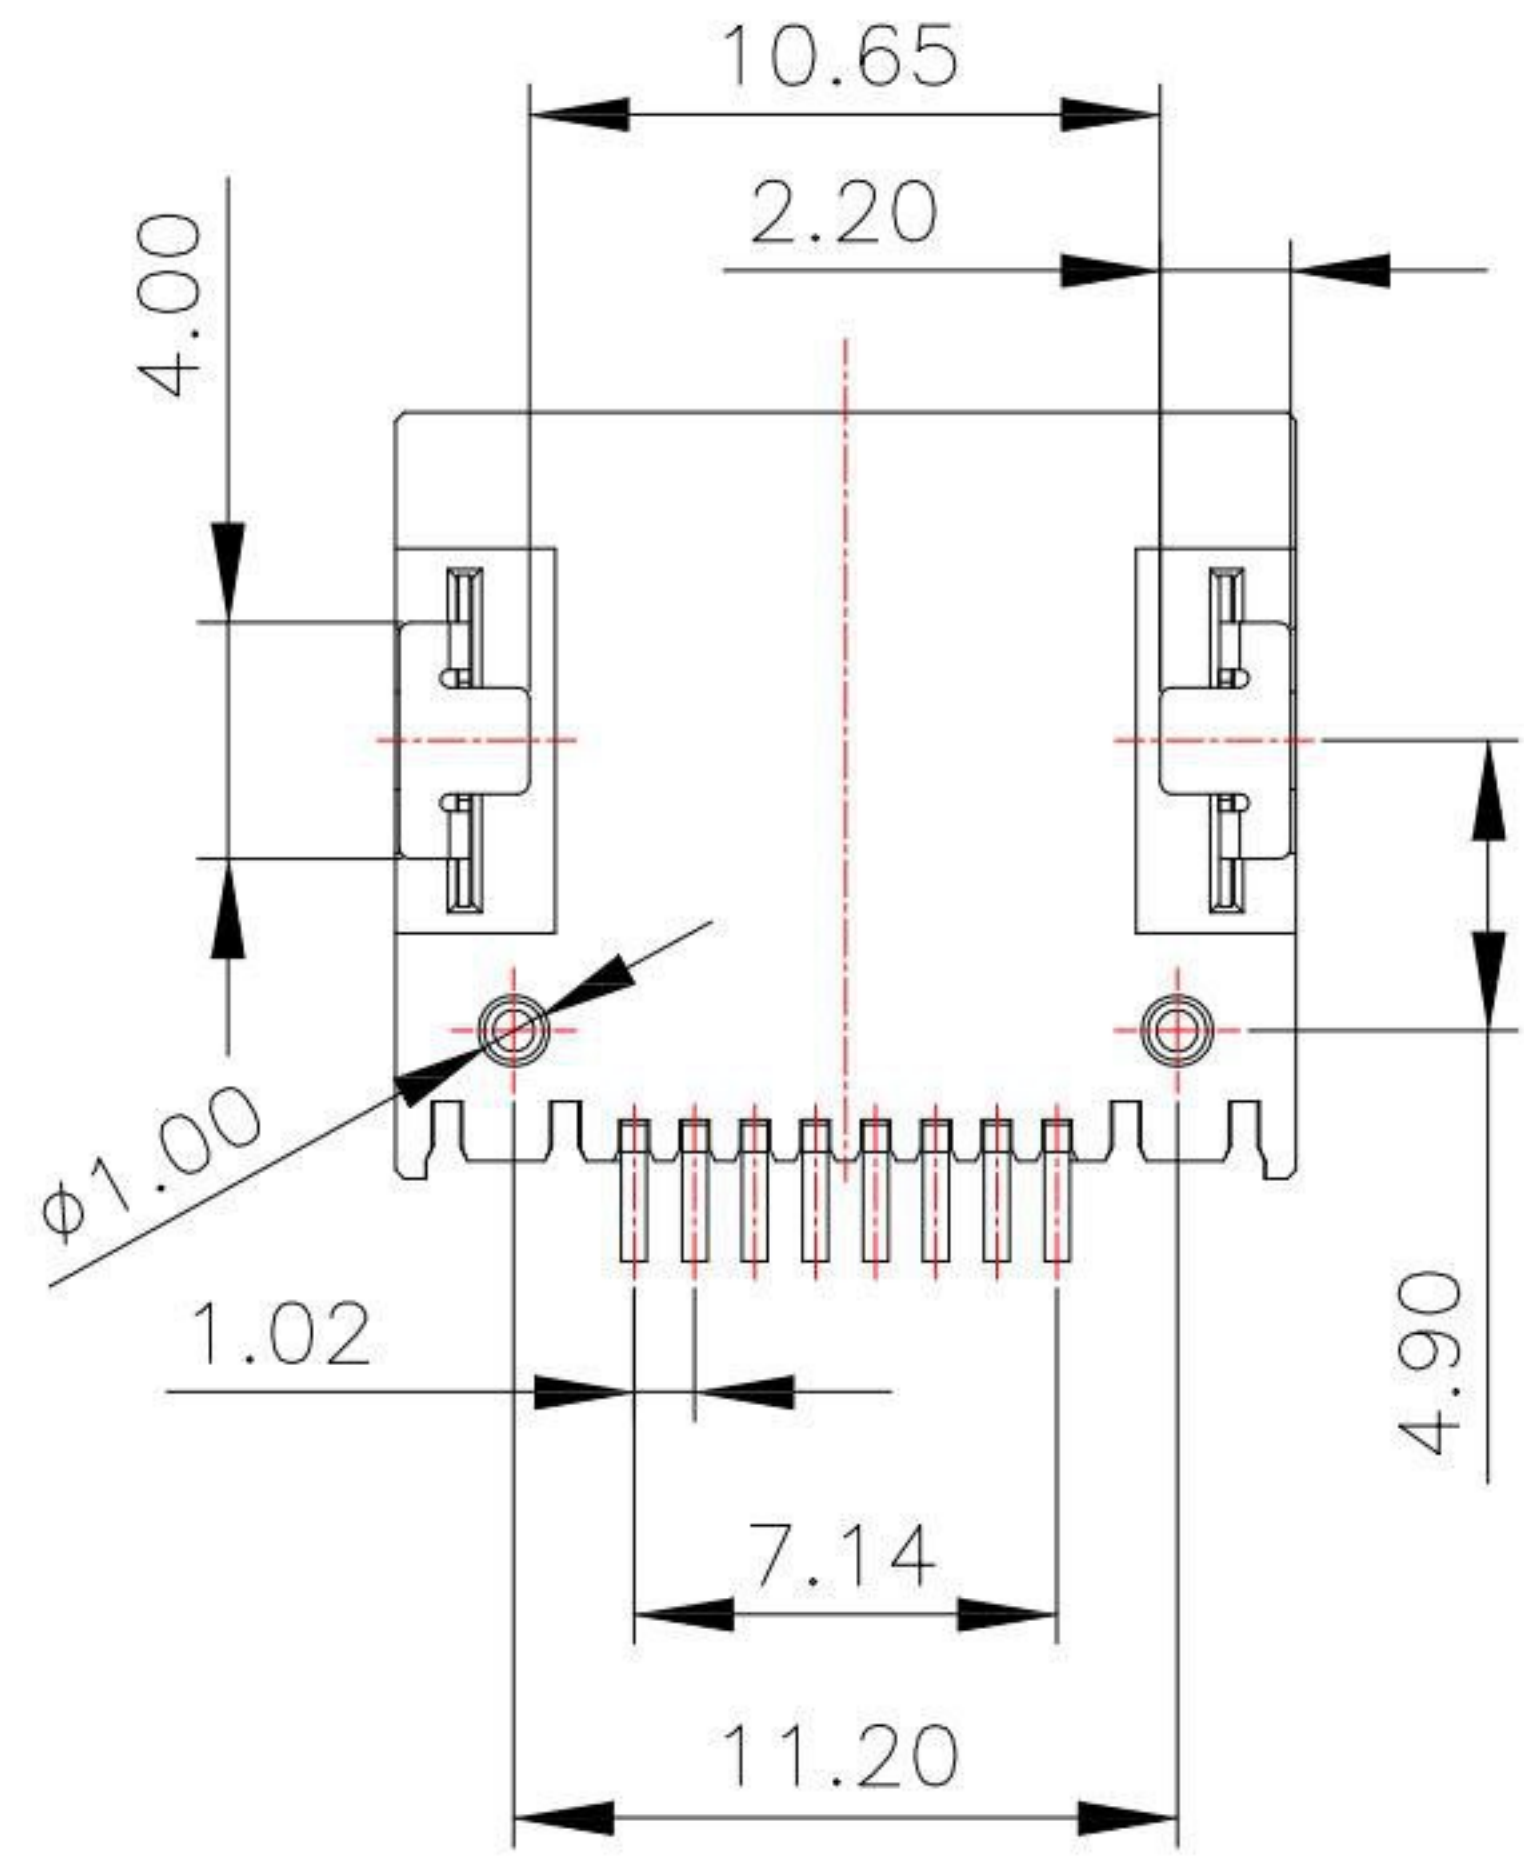

RJ45-4183M051-x-S118

鍍層厚度 :

Blank	: 1u"
2	: 15u"
3	: 30u"

NOTE :

- 1.Housing: PA6T,Black
- 2.Contact: Phosphor Bronze
- 3.Stator: Copper Alloy
- 4.Contact Plating : Plated Gold in Mating Area ;  
Gold Plated on Solder Balls ;  
Nickel under plated overall
- 5.Stator : Nickel under Plated surface layer

Electrical:

- 1.Voltage Rating : 125VAC
- 2.Current Rating : 1.5 A Max
- 3.Insulation Resistance : 1000 MΩ MIN
- 4.Dielectric Strength : 1000 VAC
- 5.Contact Resistance : 20 mΩ MAX

Environmental:

- 1.Operating Temperature : -40°C ~ +85°C

**KSD** 科斯达电子科技有限公司  
SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD  
全球 互聯零組件 制造企业

TOLERANCE UNLESS OTHERWISE STATED :  
Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	RJ45
Jack Lu	02/06/18			
CHECKED BY:	DATE	FINISH	MODLE	RJ45
Jacky Chen	02/06/18			
APPROVED BY:	DATE	SCALE	DWG NO.	RJ45-4183M051-x-S118
Tony Kao	02/06/18	1 : 1		
		SHEET NO.	PART NO.	RJ45-4183M051-x-S118
		1 of 1		

1	新增pcb layout尺寸	Jack	020618
ITEM NO.	DESCRIPTION	DRAWN	DATE

SIZE	A4
VER	R1