


PCB LAYOUT MOUNTING PATTERN

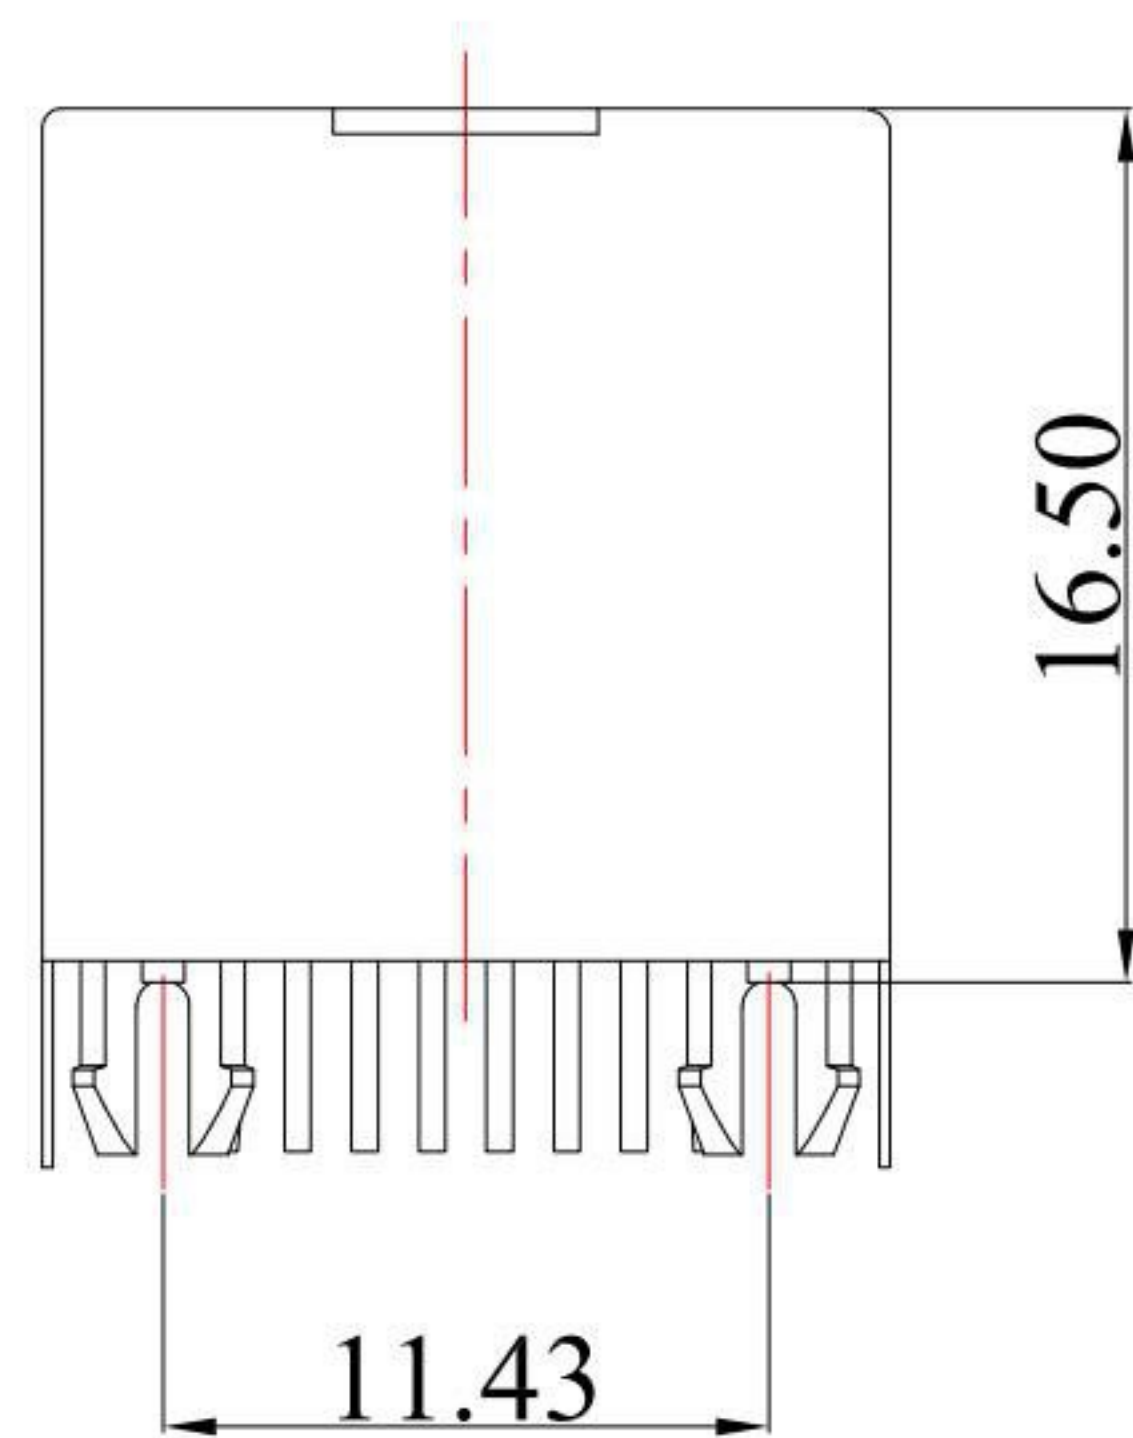

RJ45-52E811E-x-S307

鍍層厚度:

Blank : 1u"
1 : 3u"
2 : 15u"
3 : 30u"
5 : 6u"

SPECIFICATIONS

Electrical:

- 1.Voltage Rating : 125 VAC RMS
- 2.Current Rating : 1.5 AMP
- 3.Contact Resistance : 30 mΩ MAX
- 4.Insulation Resistance : 500 MΩ MIN. @500 VDC
- 5.Dielectric Strength : 1000 VAC

Mechanical:

- 1.Housing : PBT,Black
- 2.Insert : PBT,Black
- 3.Contact : Phosphor Bronze , Gold Plating over Nickel
- 4.Shield : Brass, Nickel Plated

Environmental:

- 1.Operation Temperature : -40°C ~ +85°C
- 2.Storage Temperature : -40°C ~ +85°C

KSD 科斯达电子科技有限公司
 SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD
 全球 互聯零組件 制造企业

TOLERANCE UNLESS OTHERWISE STATED:	Up to 5 ±0.2	Above 5 ~ 15 ±0.3	Above 15 ~ 30 ±0.4	Above 30 ~ 50 ±0.5	Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
------------------------------------	--------------	-------------------	--------------------	--------------------	-------------	--------------	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	RJ45
Jack Lu	08/04/21			
CHECKED BY:	DATE	FINISH	MODLE	RJ45
Jacky Chen	08/04/21			
APPROVED BY:	DATE	SCALE	DWG NO.	RJ45-52E811E-x-S307
Tony Kao	08/04/21	1 : 1		
SHEET NO.	1 of 1	PART NO.	RJ45-52E811E-x-S307	SIZE A4
				VER R