
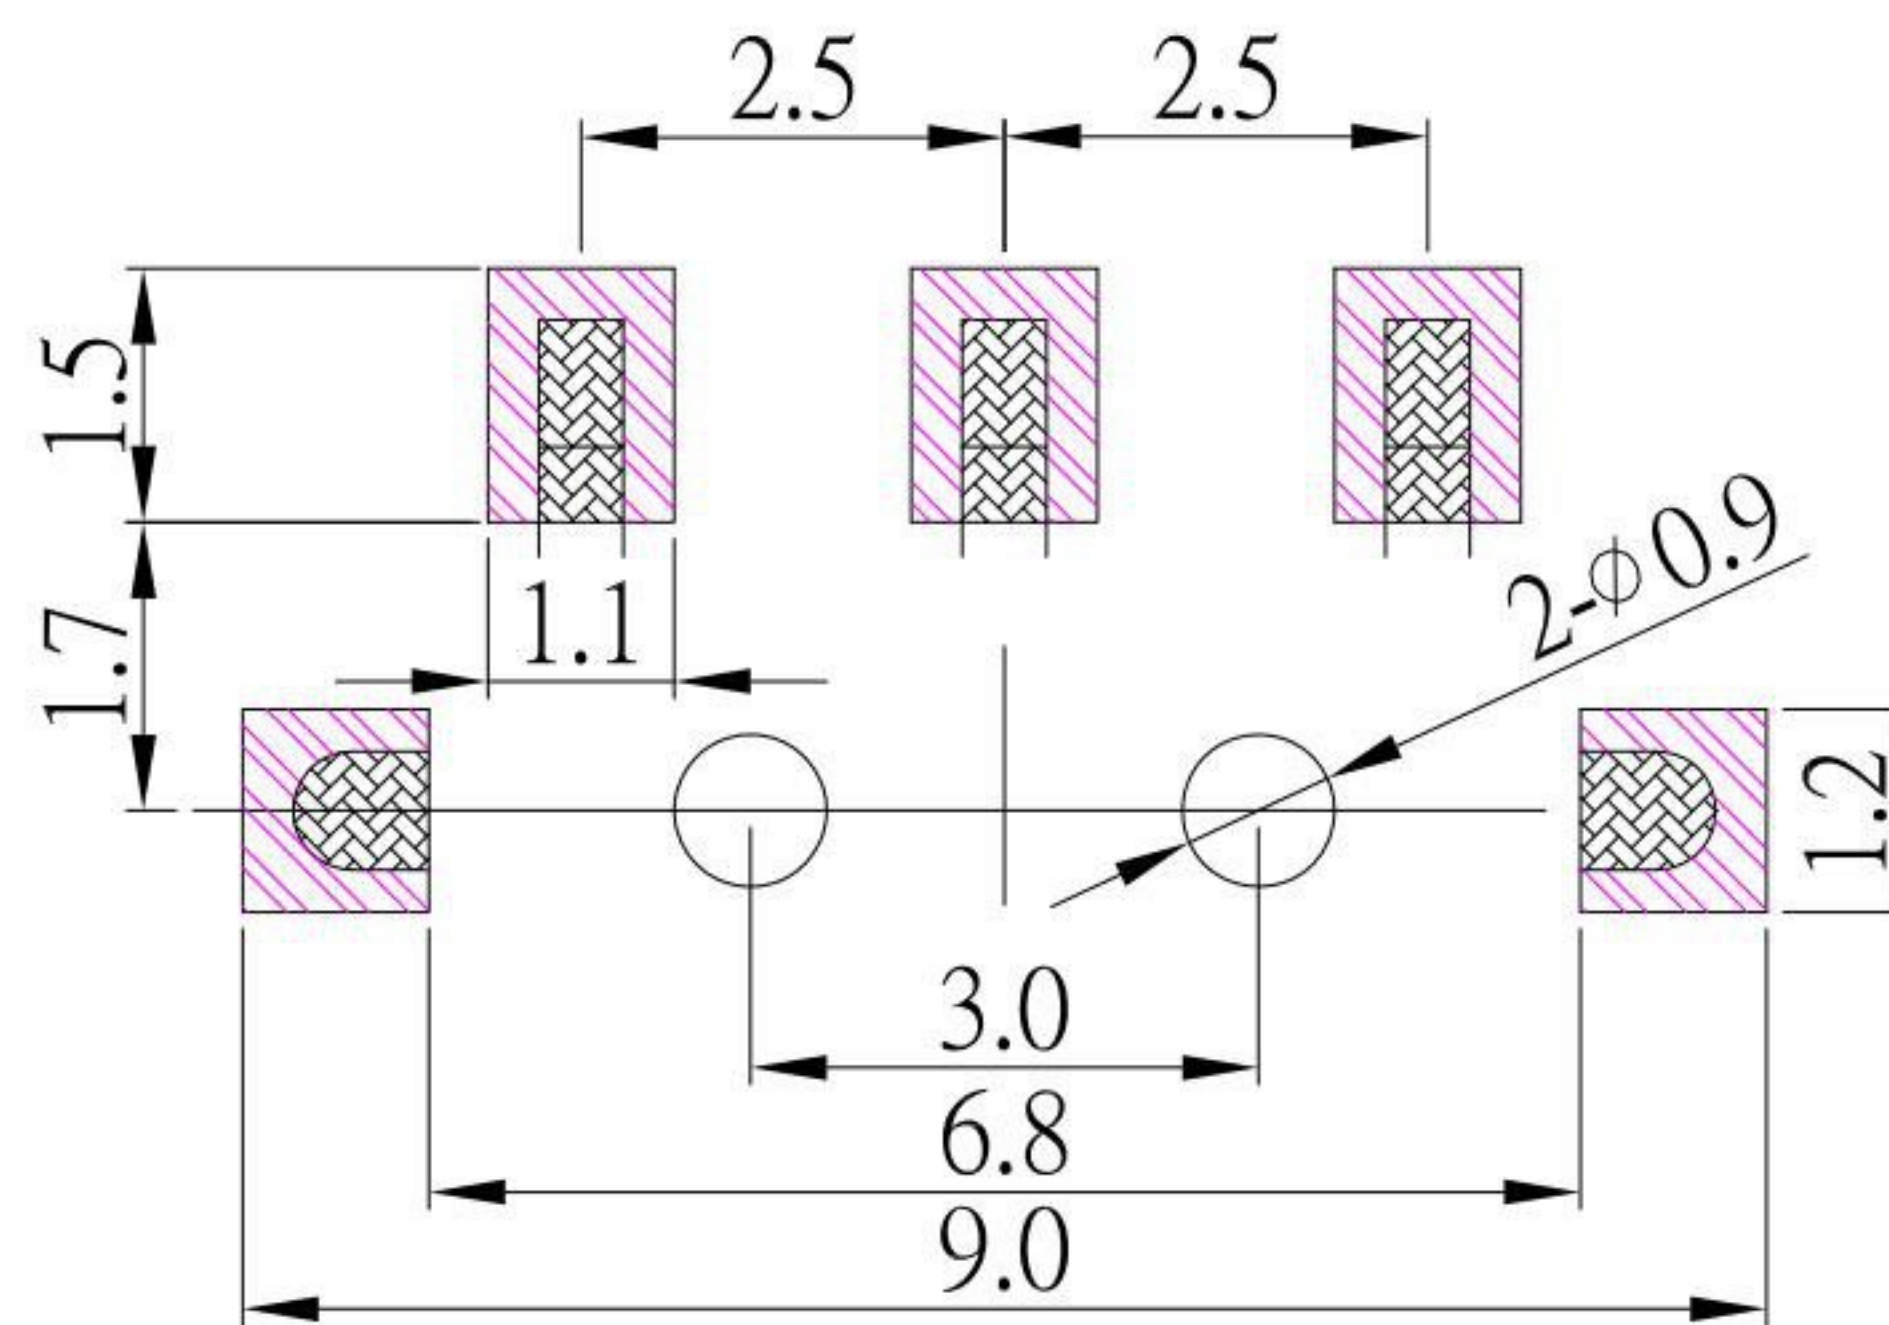


CIRCUIT DIAGRAM

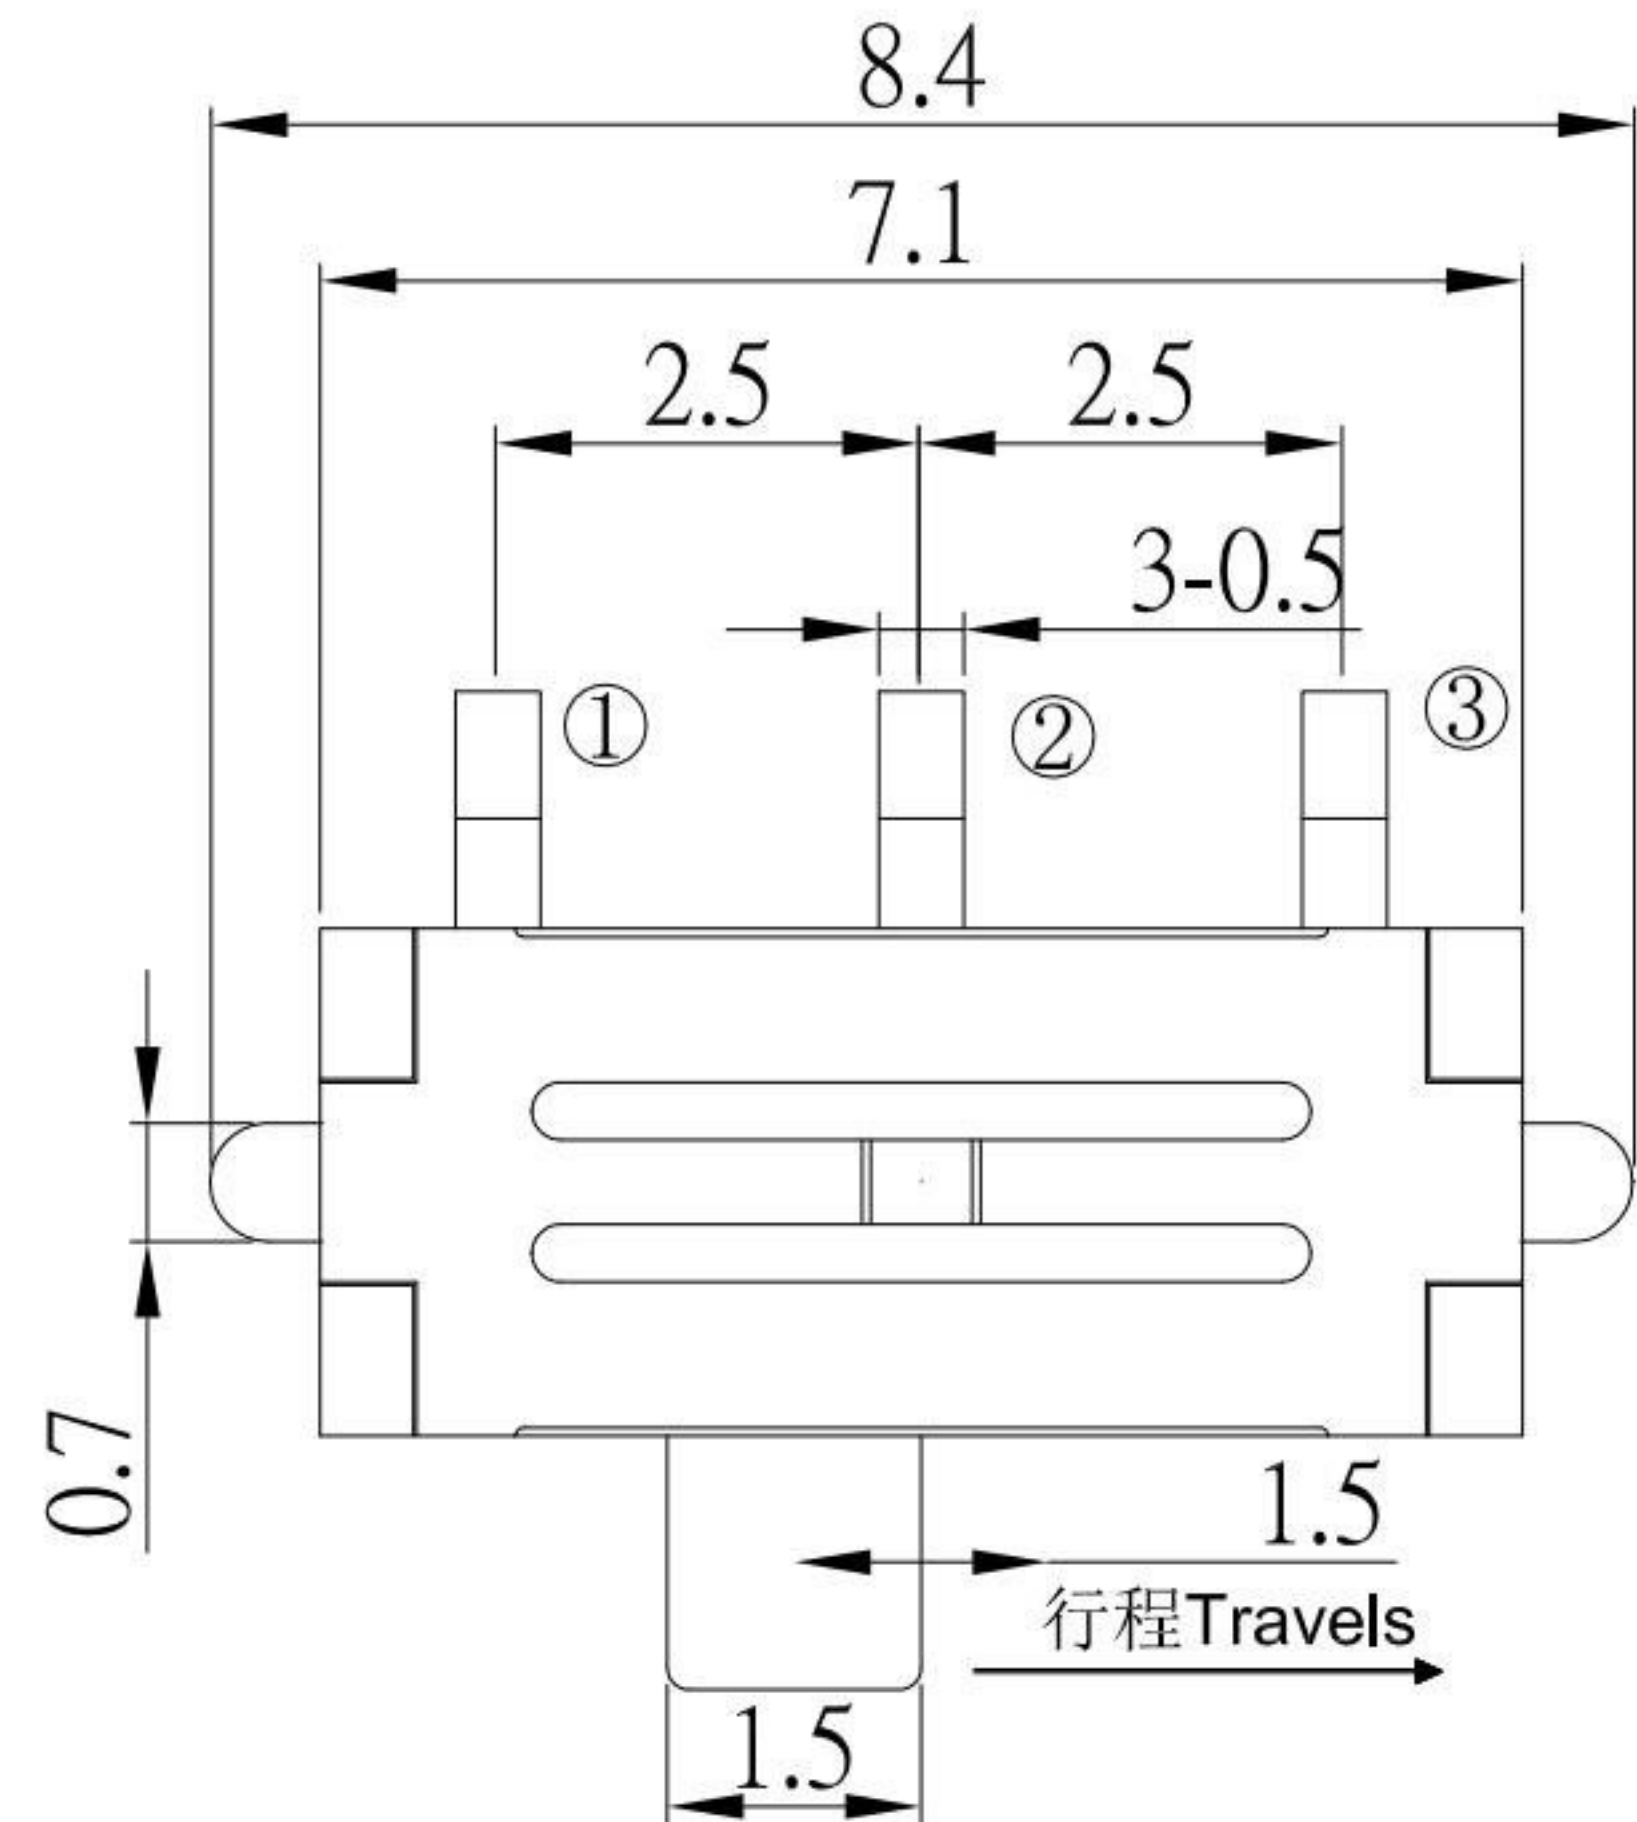

P.C.B LAND PATTERN

SPECIFICATIONS

Rating	DC 12V 0.1A
Contact Resistance	100mΩ Max
Insulation Resistance	100MΩ Min
Operating Force	160 ±50gf
Life	10,000 cycles
Operation temperature range	-40°C~85°C

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated
D	CLIP	1	PHOSPHOR BRONZE	Ag plated
C	COVER	1	SUS	Ag plated
B	CASE	1	LCP	Black
A	SLIDER	1	PA46	Black

ITEM NO.	DESCRIPTION	DRAWN	DATE
5	新增Operation temperature range	Jack	121021
4	更新材質	Jack	091720
3	更新SLIDER的顏色	Jack	091620
2	更新圖面	Jack	060917
1	新增尺寸	Jack	052715

**KSD** 科斯达电子科技有限公司  
 SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD  
 全球 互聯零組件製造企業

TOLERANCE UNLESS OTHERWISE STATED:  
 Up to 5 ±0.2  
 Above 5 ~ 15 ±0.3  
 Above 15 ~ 30 ±0.4  
 Above 30 ~ 50 ±0.5  
 Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	12/10/21		MODLE	SLIDE SWITCH
CHECKED BY:	DATE	SCALE	DWG NO.	SS-B00-S246
Jacky Chen	12/10/21	1 : 1	PART NO.	SS-B00-S246
APPROVED BY:	DATE	SHEET NO.		
Tony Kao	12/10/21	1 of 1		

SIZE	A4
VER	R5