




SS-B80x1-x-S246

Model No.	X (mm)
Blank	2.0
A	4.0



SLIDER COLOR :

Black : B



White : W

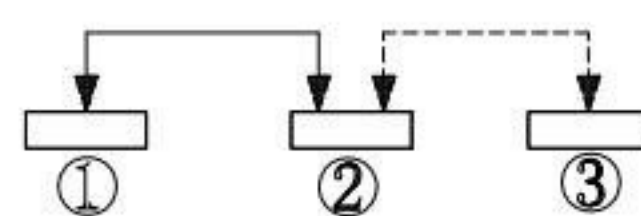

CIRCUIT DIAGRAM

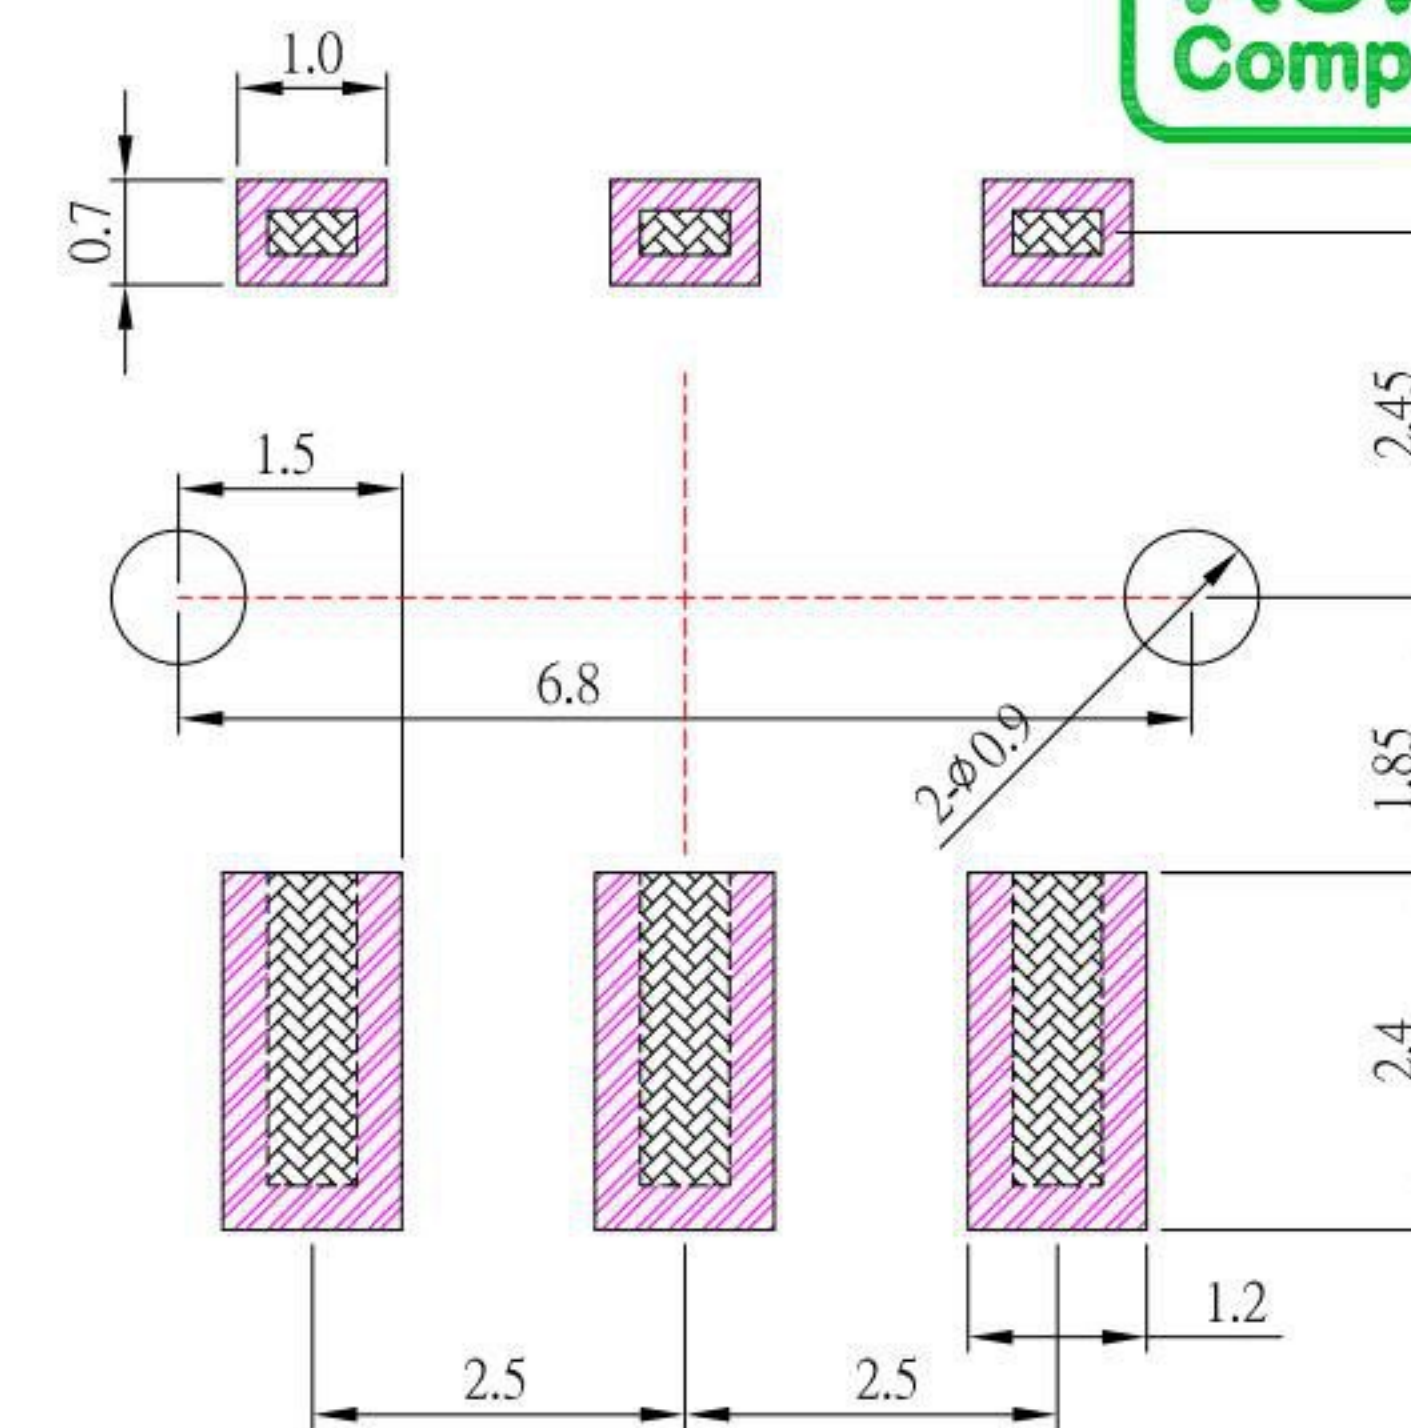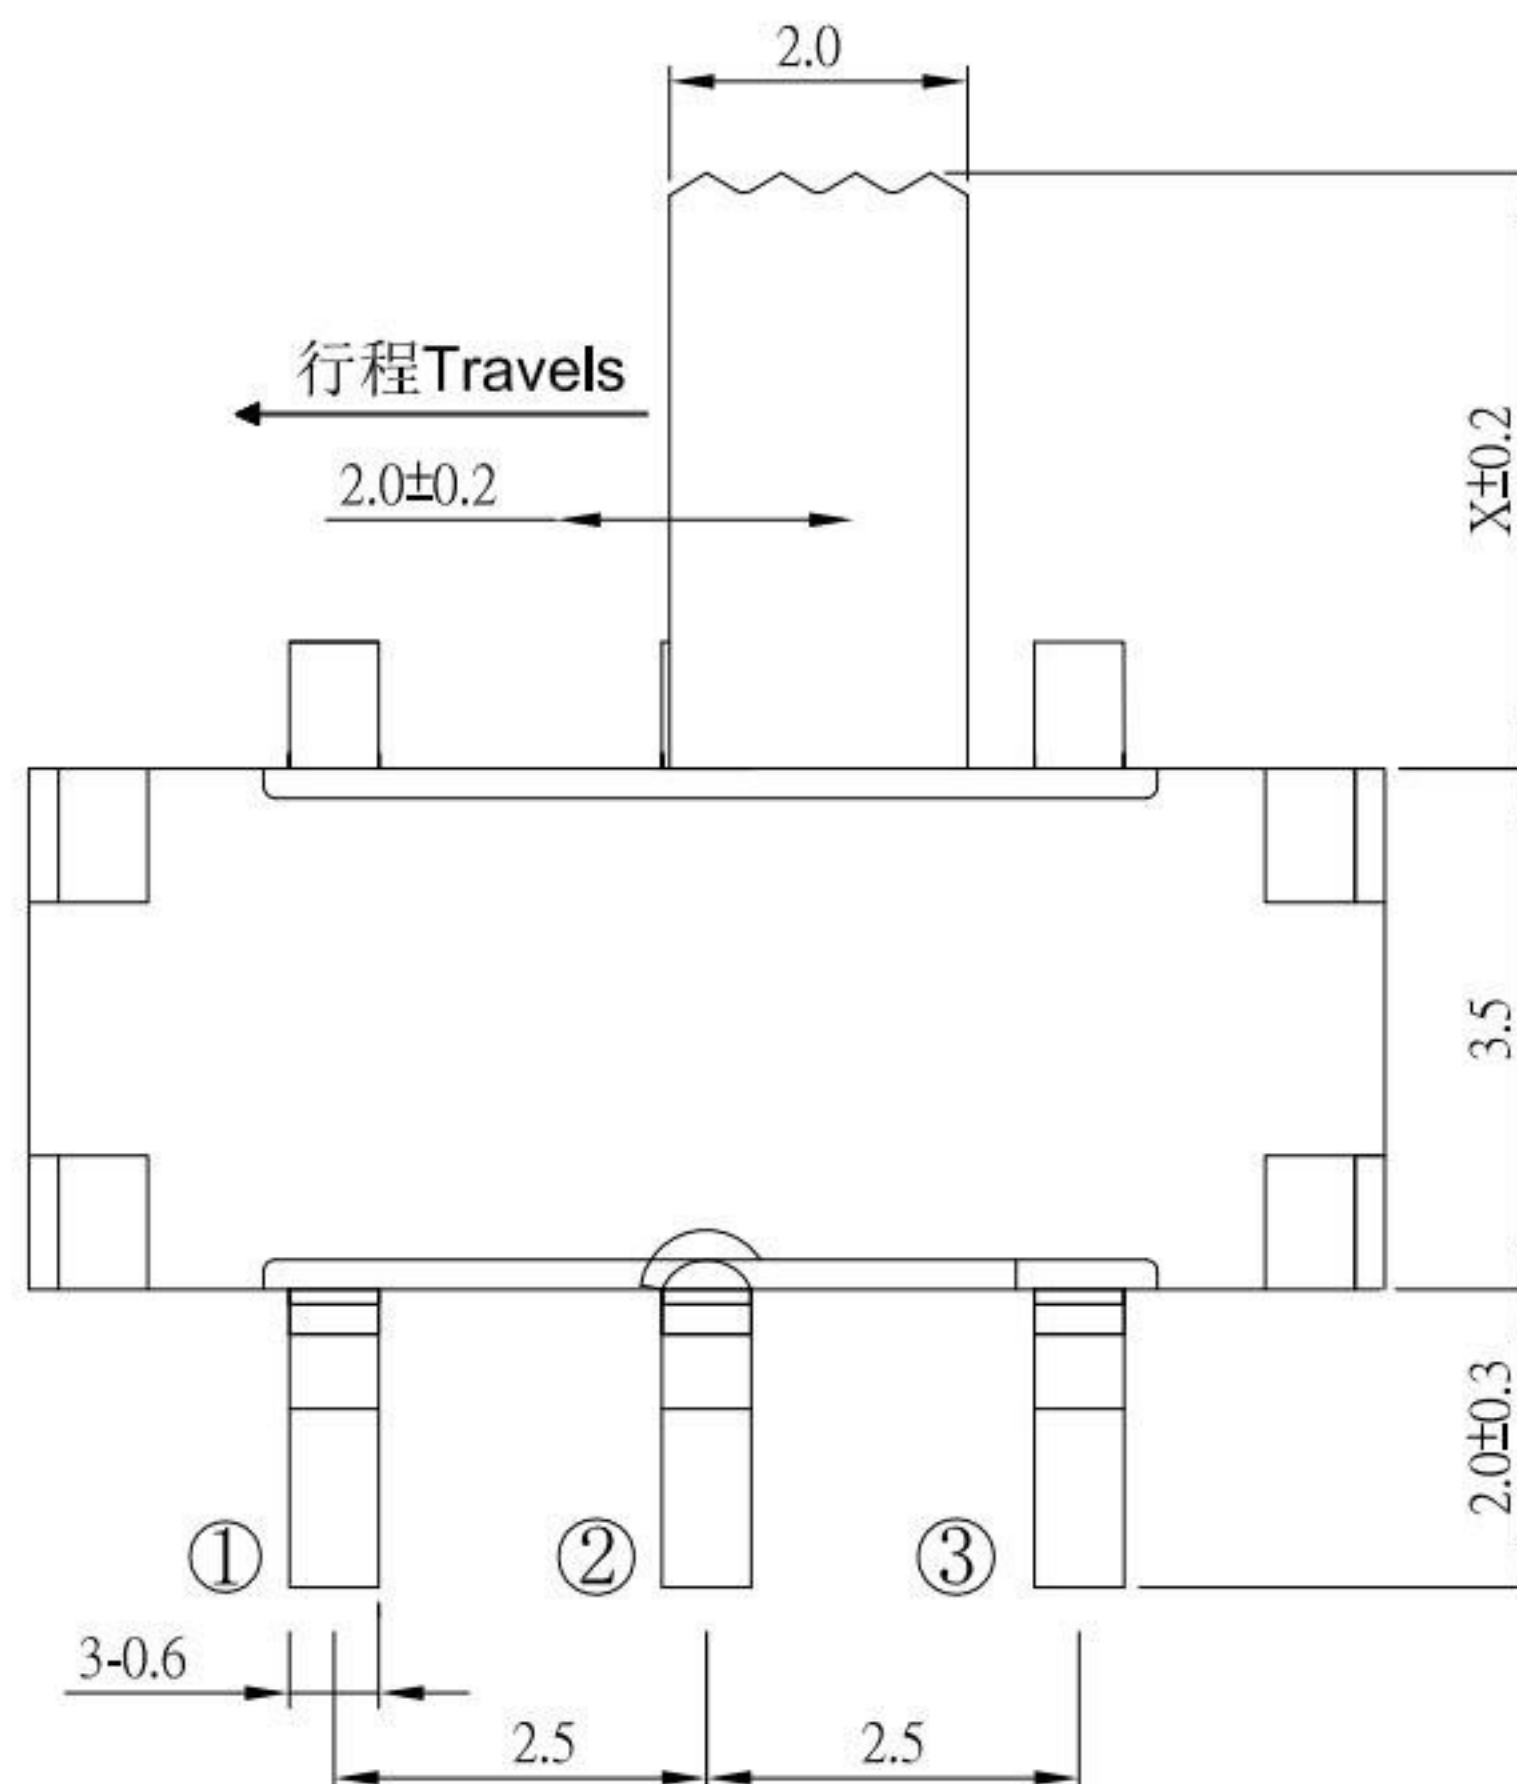

P.C.B LAND PATTERN

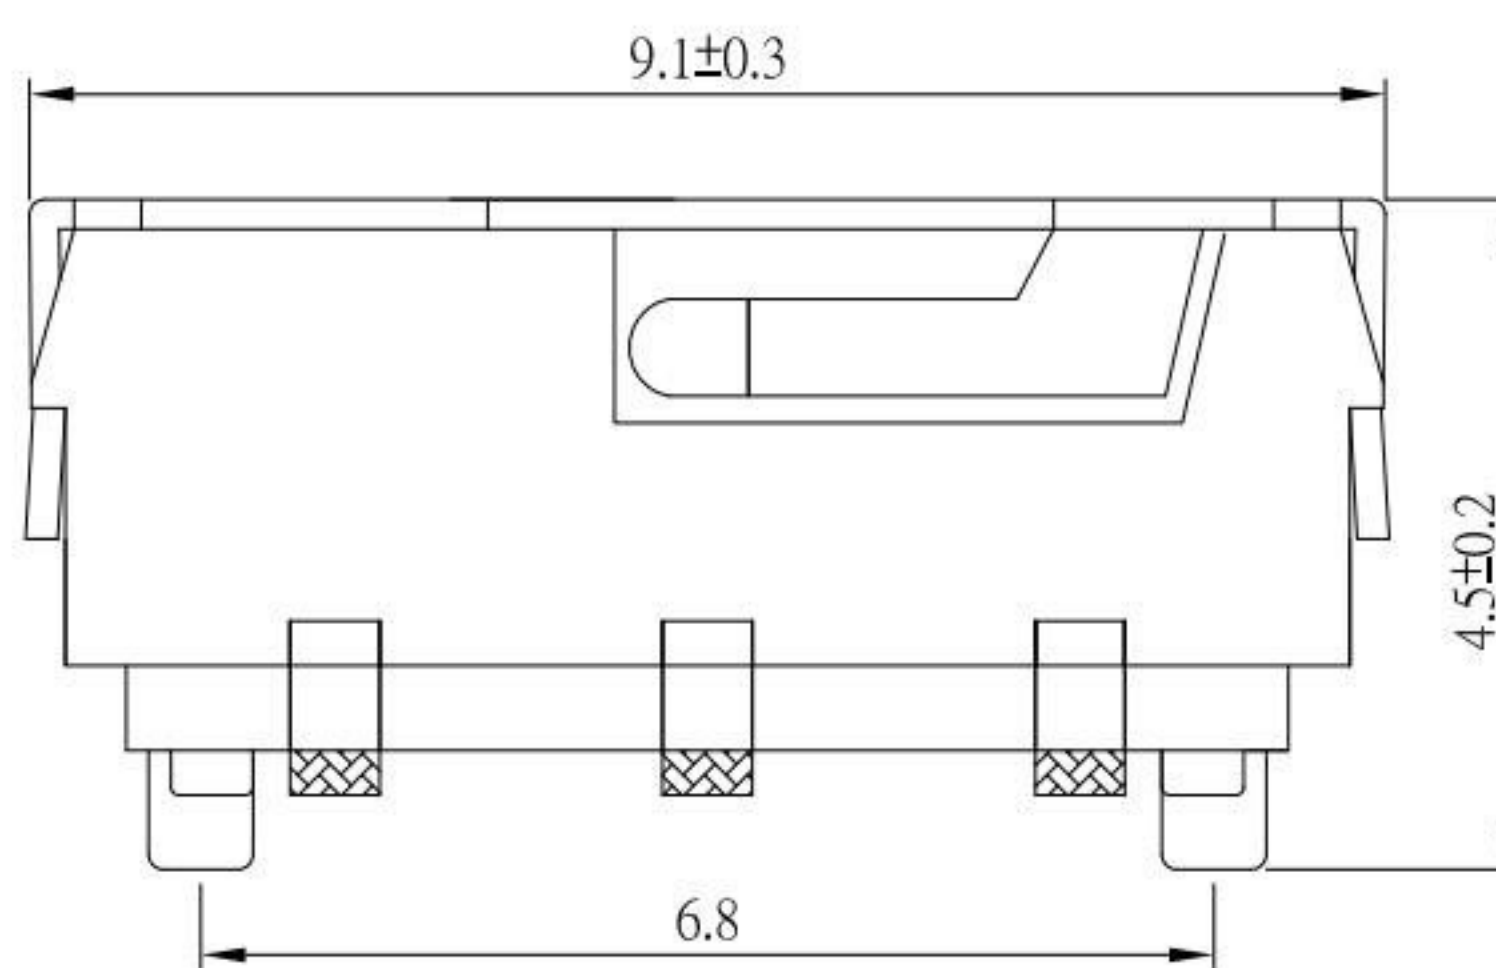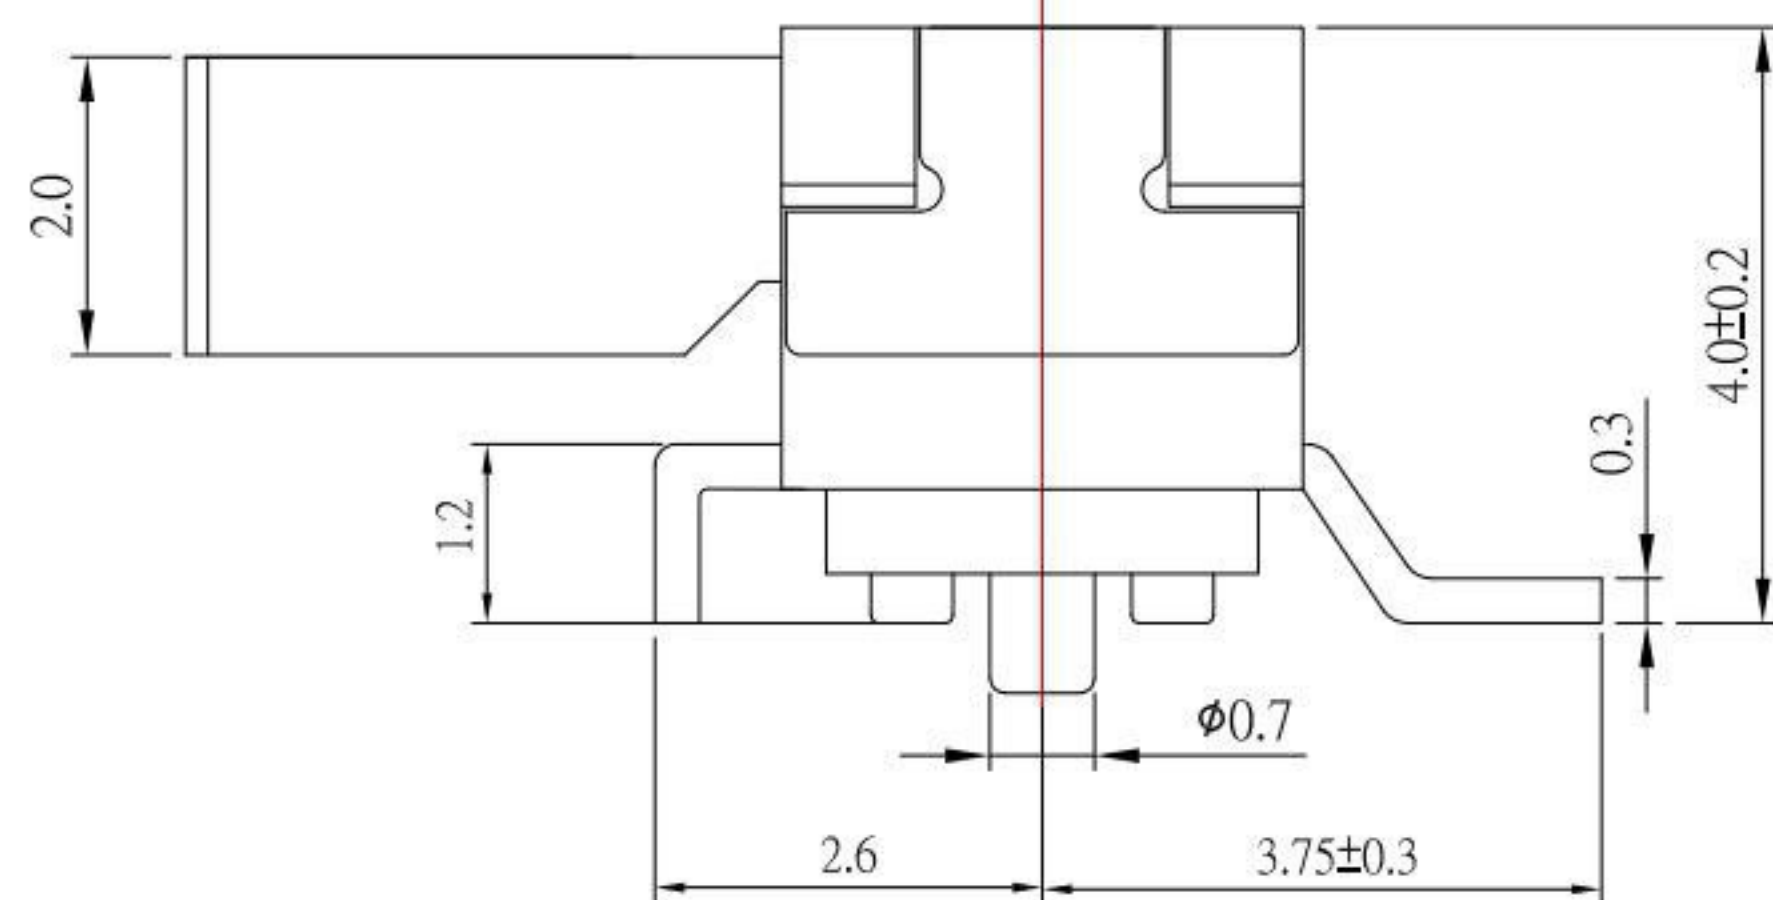

SPECIFICATIONS

Rating	100mA , 12V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	200 ± 50gf
Operating Life	10,000 cycles


NO.	DESCRIPTION	QTY	MATERIAL	PLATING
E	TERMINAL	6	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	PHOSPHOR BRONZE	Ag plated
C	COVER	1	SUS	
B	CASE	1	PA6T	Black
A	SLIDER	1	PA46	Black

ITEM NO.	DESCRIPTION	DRAWN	DATE
5	更新材質	Jack	011623
4	新增柄長選項	Jack	112522
3	更新圖面	Jack	092319
2	更新圖面	Jack	122618
1	新增尺寸	Jack	112217

KSD 科斯达电子科技有限公司
 SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD
 全球 互聯零組件 制造企业

TOLERANCE UNLESS OTHERWISE STATED :
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3

3RD. ANGEL'S



UNITS MM

DRAWN BY: Jack Lu DATE: 01/16/23
 CHECKED BY: Jacky Chen DATE: 01/16/23
 APPROVED BY: Tony Kao DATE: 01/16/23

MAT'L TITLE SWITCH
 FINISH MODLE SMT SLIDE SWICTH 撥柄鋸齒狀
 SCALE 1 : 1 DWG NO. SS-B80x1-x-S246
 SHEET NO. 1 of 1 PART NO. SS-B80x1-x-S246

SIZE A4
 VER R5