
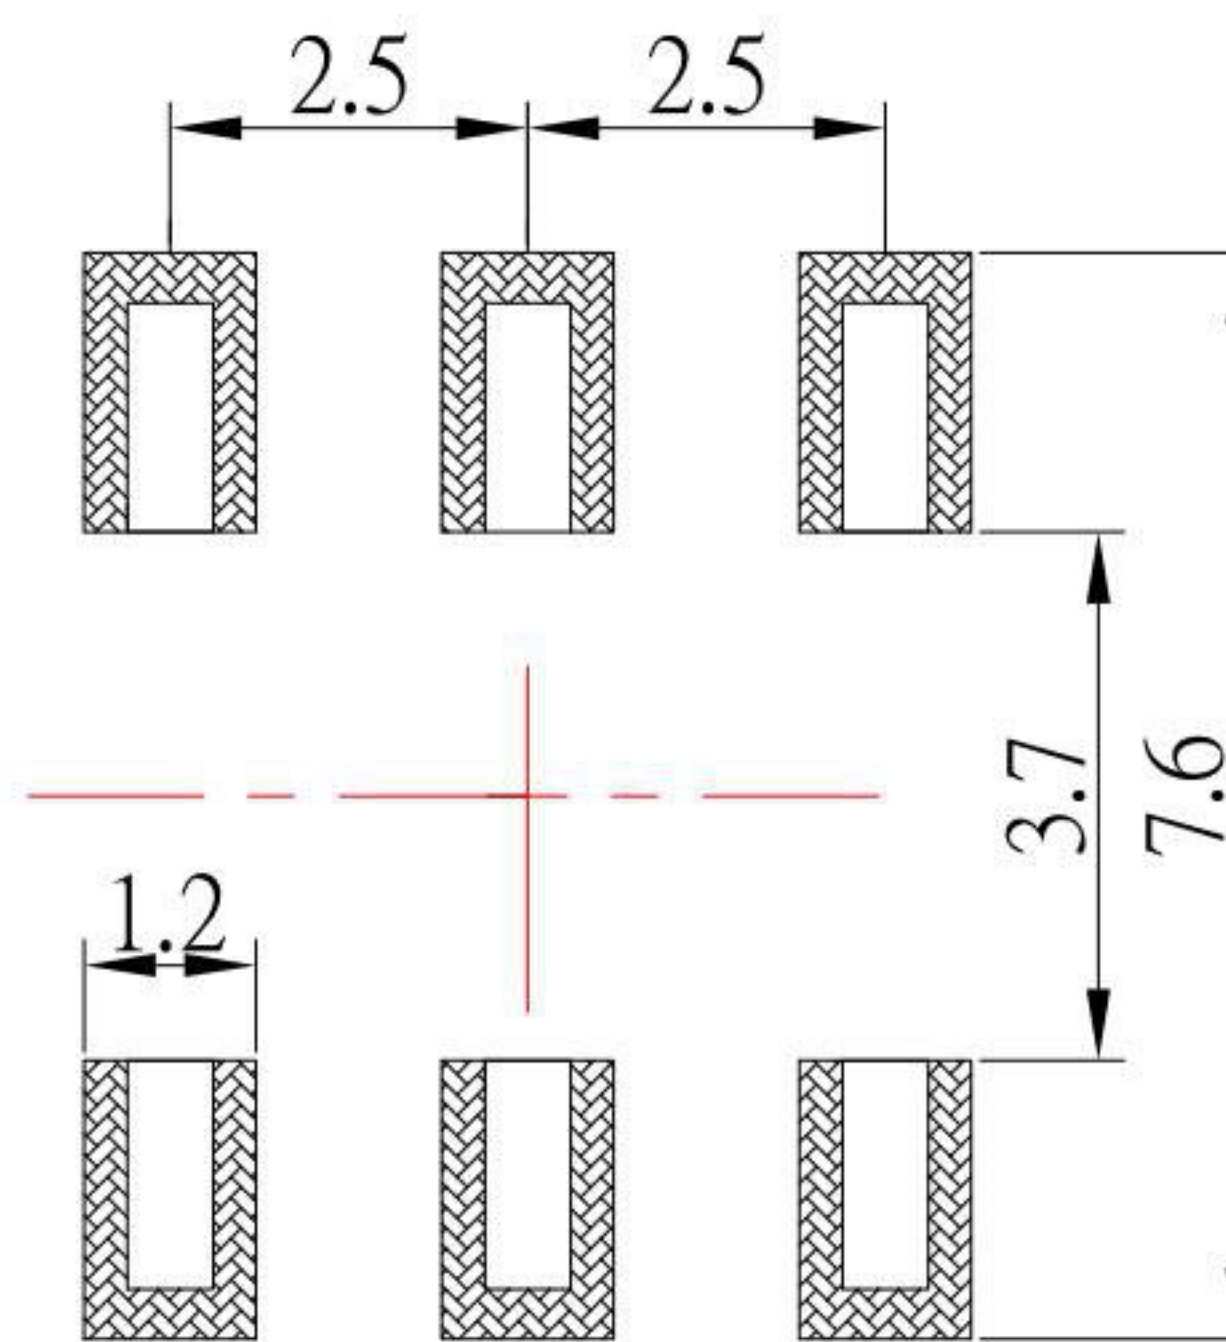


CIRCUIT DIAGRAM

| NO | MODEL | KNOB(X) |
|----|----------|---------|
| 1 | SS-D35S | 2.0 mm |
| 2 | SS-D35SA | 3.0 mm |
| 3 | SS-D35SB | 4.0 mm |

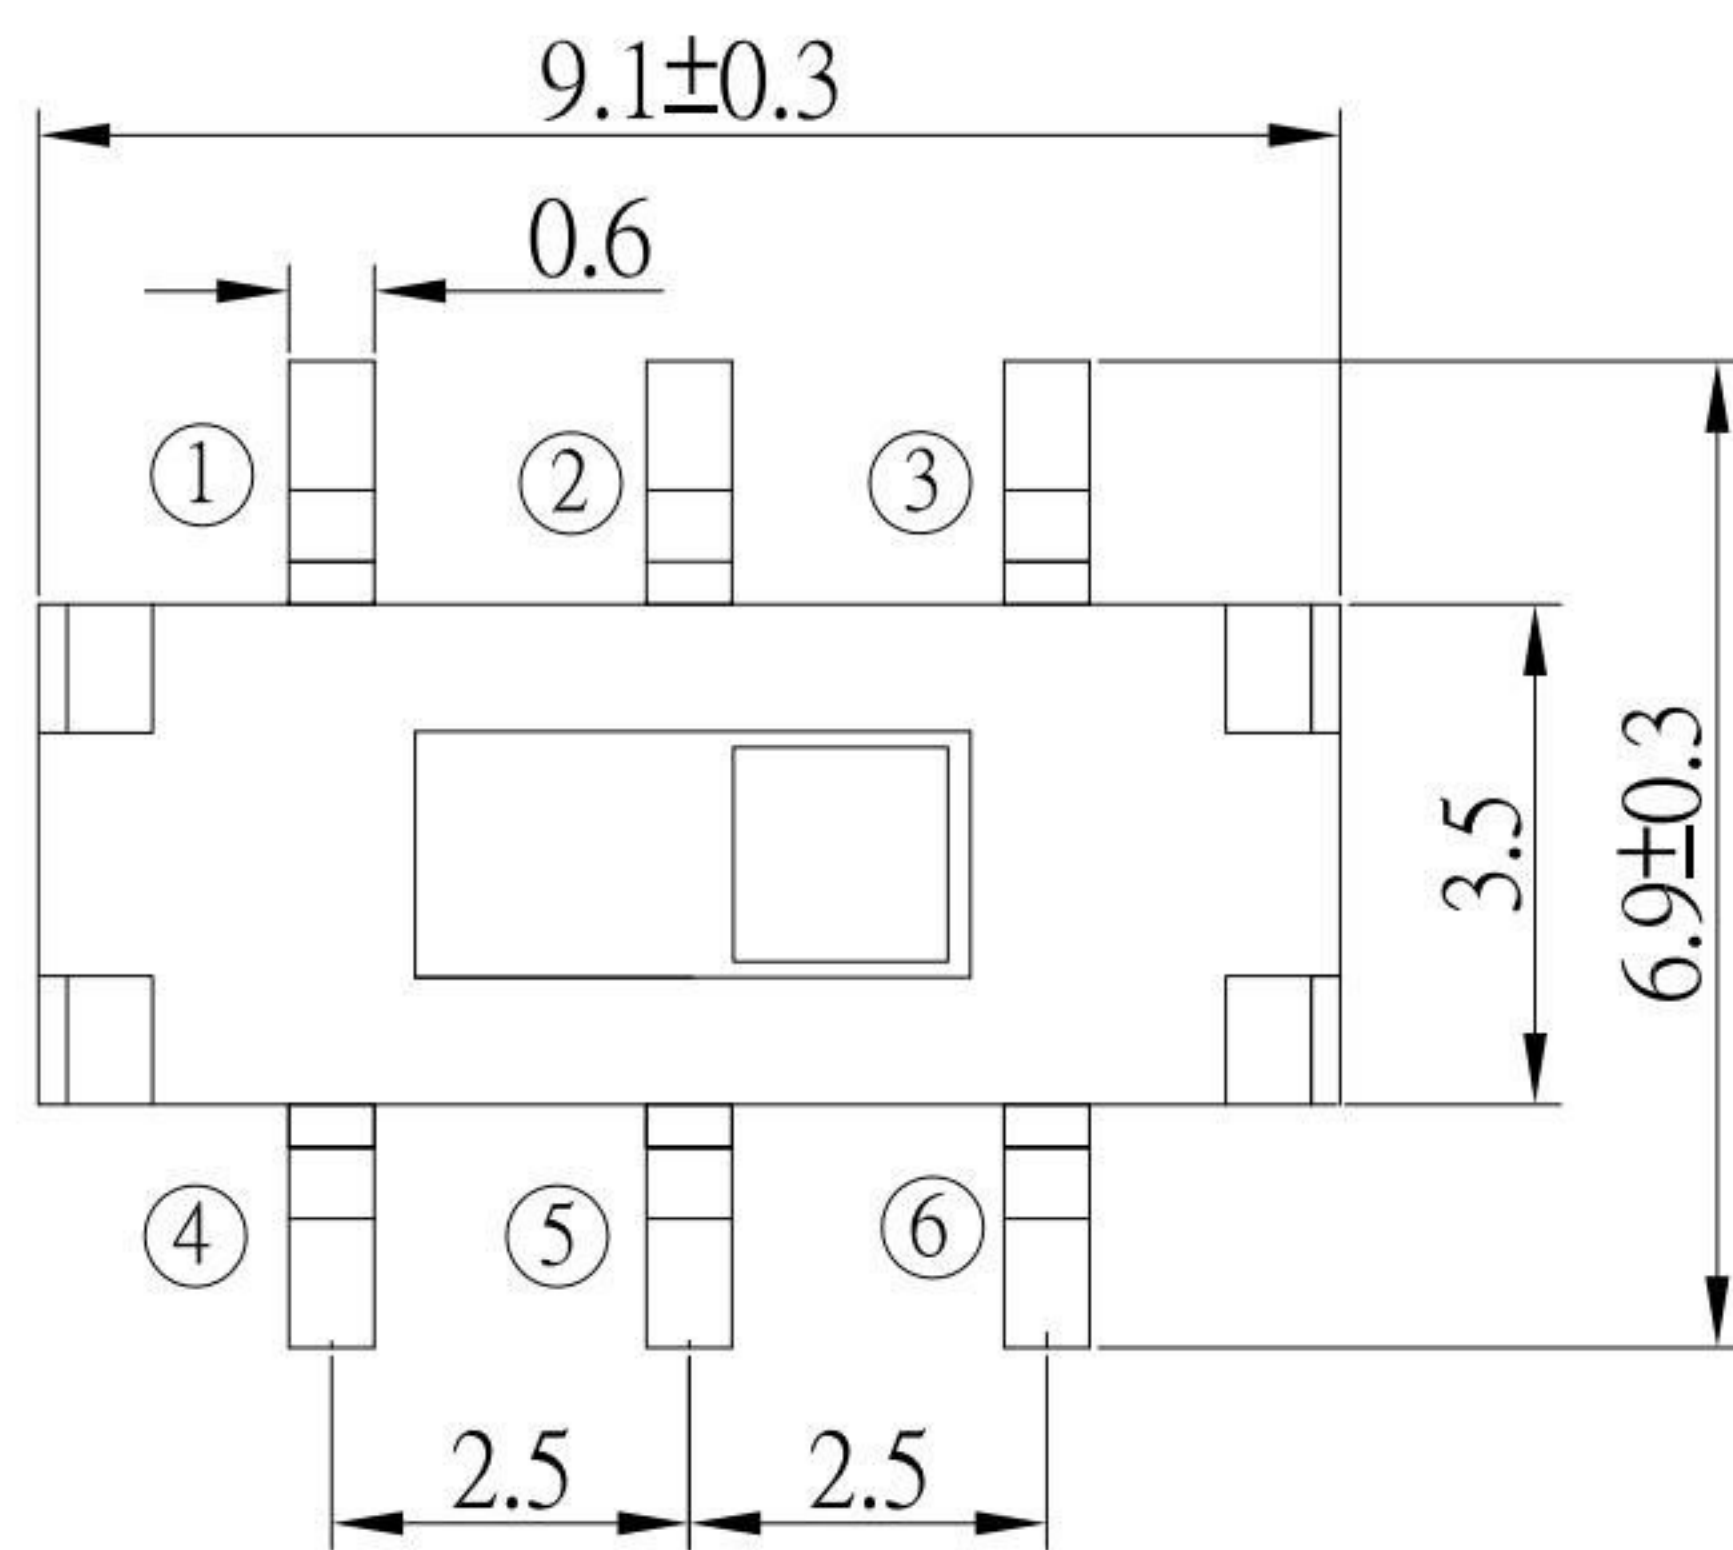

P.C.B LAND PATTERN

SPECIFICATIONS

| | |
|---------------------------------|--------------------|
| Rating | 0.3A 6V DC |
| Insulation Resistance | 50MΩ Min. |
| Dielectric Withstanding Voltage | AC 250 V(50Hz)1min |
| Contact Resistance | 100mΩ Max. |
| Operating Force | 200 ± 50gf |
| Operating Life | 10,000 cycles |

| NO. | DESCRIPTION | QTY | MATERIAL | PLATING |
|-----|-------------|-----|-----------------|-----------|
| E | TERMINAL | 6 | PHOSPHOR BRONZE | Ag plated |
| D | CLIP | 2 | BECU | Ag plated |
| C | COVER | 1 | SUS | |
| B | CASE | 1 | PA6T | Black |
| A | SLIDER | 1 | PA46 | Black |

| 10 | 更新撥柄位置 | Jack | 030921 |
|----------|---------------|-------|--------|
| 9 | 新增高度選項 | Jack | 032720 |
| 8 | 更新樣式 | Jack | 032719 |
| 7 | 新增Travel | Jack | 052518 |
| 5 | 更新材質 | Jack | 022316 |
| 4 | 更新SPEC及更新為A0版 | Jack | 021916 |
| 3 | 更新材質 | Jack | 073014 |
| 2 | 新增高度選項及更新料號 | Jack | 040814 |
| 1 | 更新Rating | Jack | 062813 |
| ITEM NO. | DESCRIPTION | DRAWN | DATE |

KSD 科斯达电子科技有限公司
 SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD
 全球 互聯零組件 制造企业

TOLERANCE UNLESS OTHERWISE STATED:
 Up to 5 ±0.2
 Above 5 ~ 30 ±0.3
 Above 30 ~ 50 ±0.4
 Above 50 ±0.5
 Angle ±0.3°

3RD. ANGEL'S
 UNITS MM

| | | | | |
|--------------|----------|-----------|----------|------------------|
| DRAWN BY: | DATE | MAT'L | TITLE | SWITCH |
| Jack Lu | 03/09/21 | | MODLE | SMT SLIDE SWICTH |
| CHECKED BY: | DATE | SCALE | DWG NO. | SS-D35Sx-B-S246 |
| Jacky Chen | 03/09/21 | 1 : 1 | PART NO. | SS-D35Sx-B-S246 |
| APPROVED BY: | DATE | SHEET NO. | 1 of 1 | |
| Tony Kao | 03/09/21 | | | |

SIZE A4
 VER R10