


P.C.B LAYOUT

SPECIFICATIONS

Rating	DC 12V, 0.1A.
Contact Resistance	100mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	40±10 gf
Mechanical Life	50,000 cycles

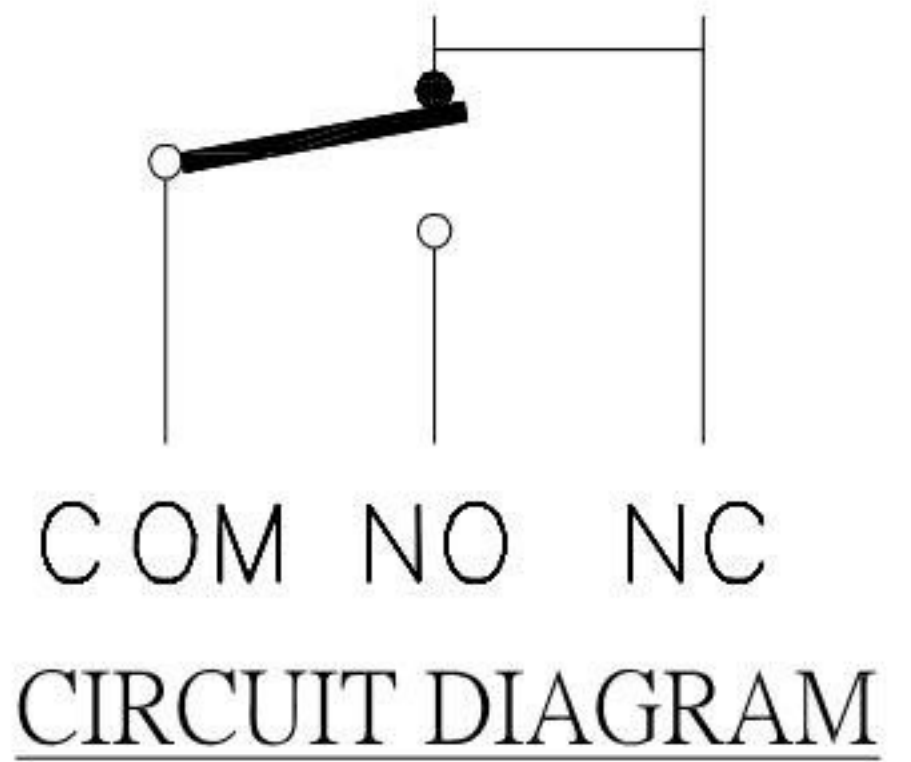

5	TERMINAL	BRASS	3	Ag PLATED
4	COVER	PA66	1	BLACK
3	SPRING	BeCu	1	Ag PLATED
2	KNOB	PA66	1	BLACK
1	BASE	PA66	1	BLACK
NO	NAME	MATERIAL	QTY	FINISHING

**KSD** 科斯达电子科技有限公司  
SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD  
全球 互联零组件制造企业

TOLERANCE UNLESS OTHERWISE STATED:  
 Up to 5 ±0.2  
 Above 5 ~ 15 ±0.3  
 Above 15 ~ 30 ±0.4  
 Above 30 ~ 50 ±0.5  
 Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	06/11/21	FINISH	MODLE	MICRO SWITCH
CHECKED BY:	DATE	SCALE	DWG NO.	SSM-001A-40-S379
Jacky Chen	06/11/21	SHEET NO.	PART NO.	SSM-001A-40-S379
APPROVED BY:	DATE			
Tony Kao	06/11/21			

2	更新圖面	Jack	061121
1	更新料號	Jack	050521
ITEM NO.	DESCRIPTION	DRAWN	DATE

SIZE A4  
VER R3