



Model No.	Switching Position		
	B101	ON	NONE
Term Comm.	2-3	OPEN	2-1

SCHEMATIC

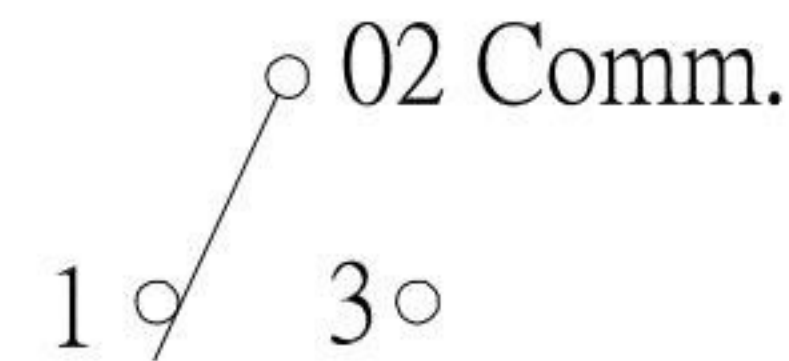

PCB LAYOUT MOUNTING

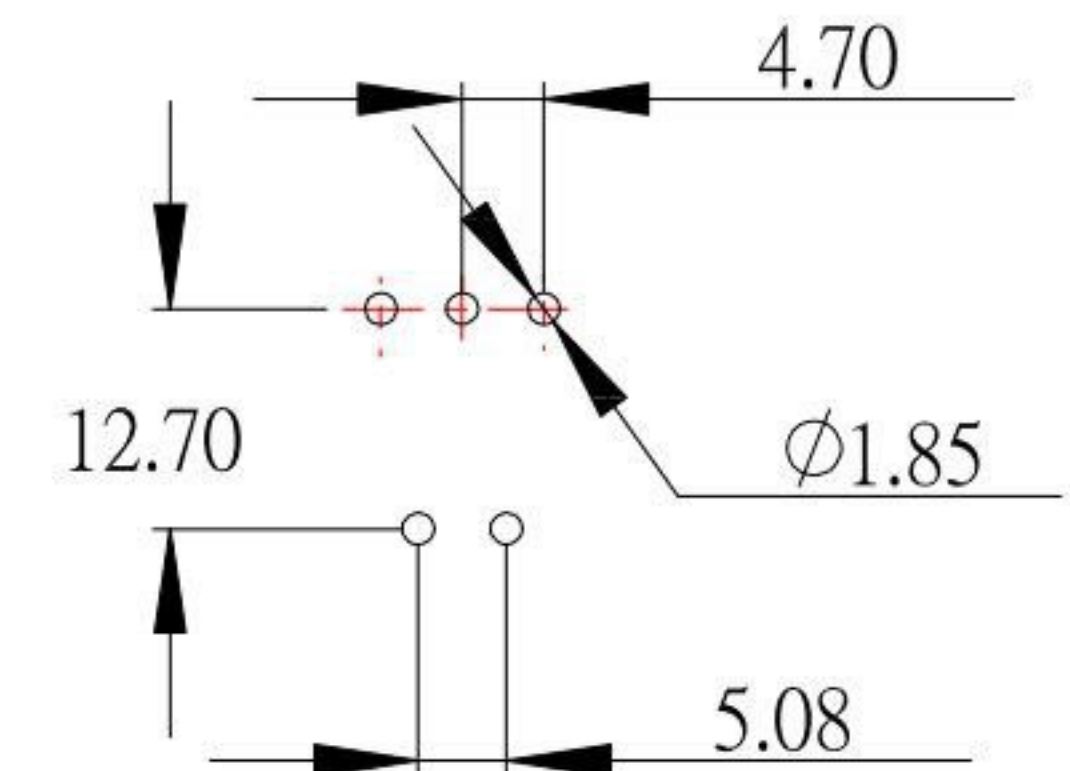

SPECIFICATIONS:

CONTACT RATING : 3 AMPS @120V AC or 28 VDC.
 1 AMPS @250V AC or 0.4VA AMPS @ 20 V AC or DC
 ELECTRICAL LIFE : 6,000 make-and break cycles at full load.
 CONTACT RESISTANCE : 10 mΩ max. initial @ 2-4 VDC.
 100 mA , for both coin silver and gold plated contacts.
 INSULATION RESISTANCE : 1,000 MΩ min.
 DIELETRIC STRENGTH : 1,000 V RMS @ sea level.
 OPERATING TEMPERATURE : -30°C to 130 °C

MATERIALS:

CASE : Diallyl phthalate (DAP)(UL-94V-0).
 PLUNGER : Polybutylene terephthalate (PBT) (UL 94V-0)
 BUSHING : ZINC ALLOY.
 HOUSING : Stainless steel.
 TERMINAL/CONTACT : Brass, with silver or gold plated.
 or gold over silver
 SWITCH SUPPORT : Brass, tin plated.

KSD 科斯达电子科技有限公司
 SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD
 全球 互联零组件制造企业

TOLERANCE UNLESS OTHERWISE STATED:	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
------------------------------------	--	--------------	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Frank Wu	09/20/11			
CHECKED BY:	DATE	FINISH	MODLE	TOGGLE PUSH SW
Jacky Chen	09/20/11			
APPROVED BY:	DATE	SCALE	DWG NO.	TG-B101P1B2A3
Tony Kao	09/20/11	1 : 1		
		SHEET NO.	PART NO.	TG-B101P1B2A3
		1 of 1		

ITEM NO.	DESCRIPTION	DRAWN	DATE