
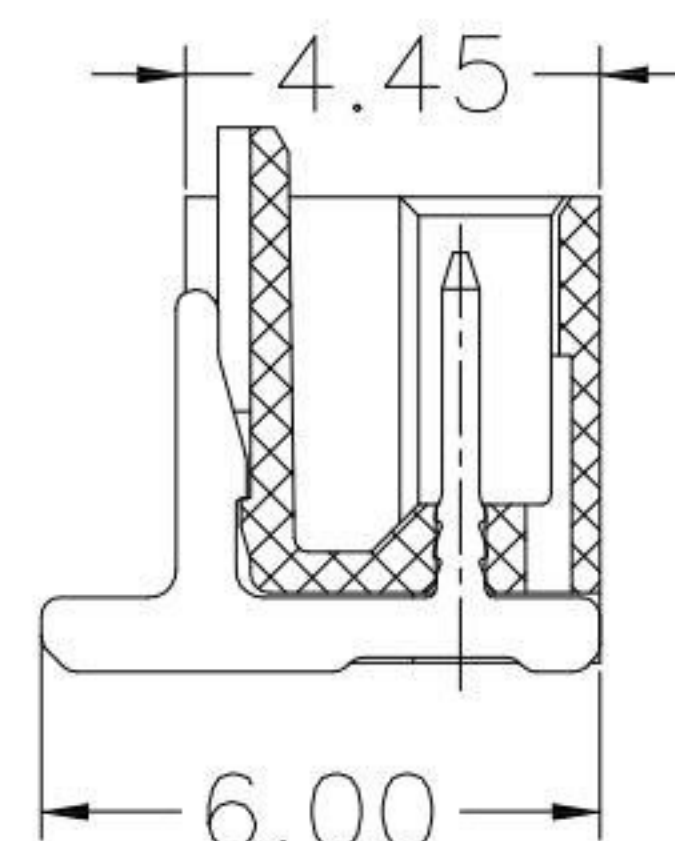


P.C.B LAYOUT MOUNTING PATTERN

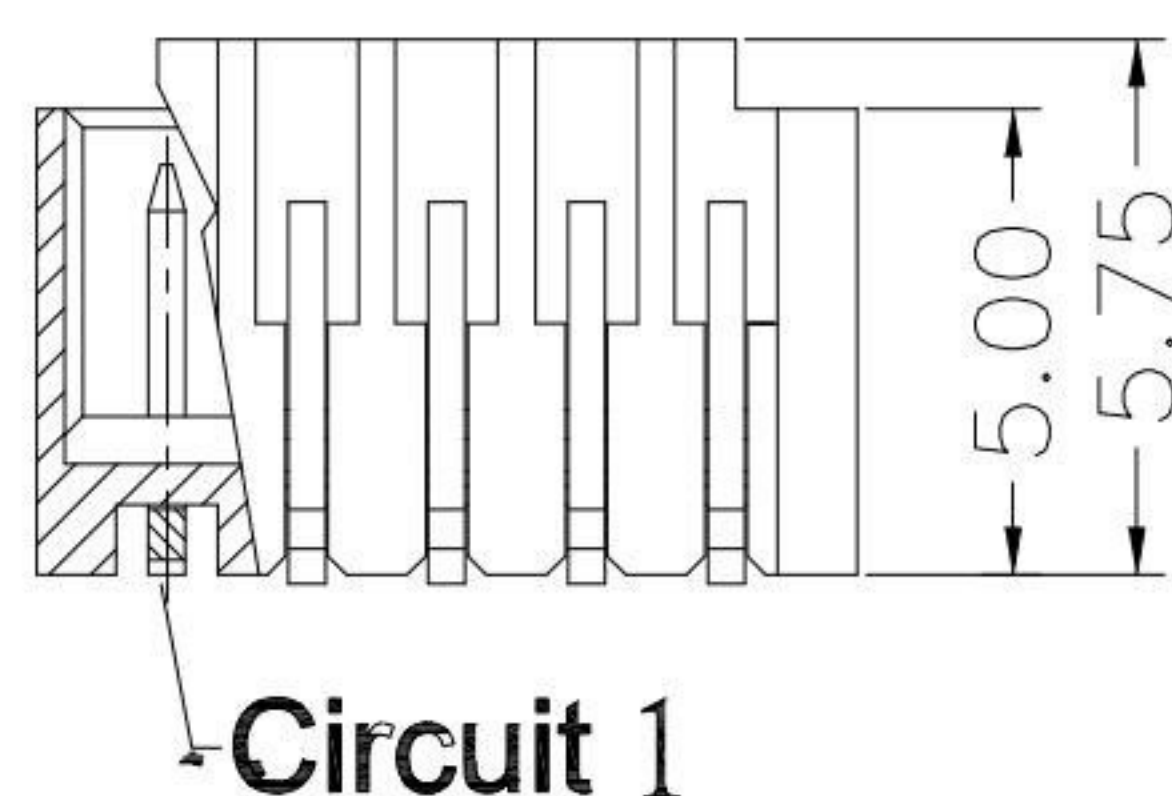

SPECIFICATIONS

Current rating : 1.0A AC , DC
 Voltage rating : 100V AC , DC
 Temperature rating : -25°C ~ +85°C
 Insulation resistance : 500MΩ min.
 Withstand voltage : 500V AC/minute
 Contact resistance : 20mΩ /Max
 Material:
 Housing : Nylon 6T, UL94V-0
 Pin : Brass / Tin-plated
 Contact : Phosphor Bronze

PART NO.	Dimensions	
	A	B
WF-1500VS02	1.50	4.30
WF-1500VS03	3.00	5.80
WF-1500VS04	4.50	7.30
WF-1500VS05	6.00	8.80
WF-1500VS06	7.50	10.30
WF-1500VS07	9.00	11.80
WF-1500VS08	10.50	13.30
WF-1500VS09	12.00	14.80

KSD 科斯达电子科技有限公司
 SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD
 全球 互联零组件制造企业

TOLERANCE UNLESS OTHERWISE STATED :
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3

3RD. ANGEL'S
 UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	01/04/13			
CHECKED BY:	DATE	FINISH	MODLE	WAFER 1.5 SMT 180度
Jacky Chen	01/04/13			
APPROVED BY:	DATE	SCALE	DWG NO.	WF-1500VSxx-S208
Tony Kao	01/04/13	1 : 1		
		SHEET NO.	PART NO.	WF-1500VSxx-S208
		1 of 1		

1	更新圖面	Jack	010413
ITEM NO.	DESCRIPTION	DRAWN	DATE