
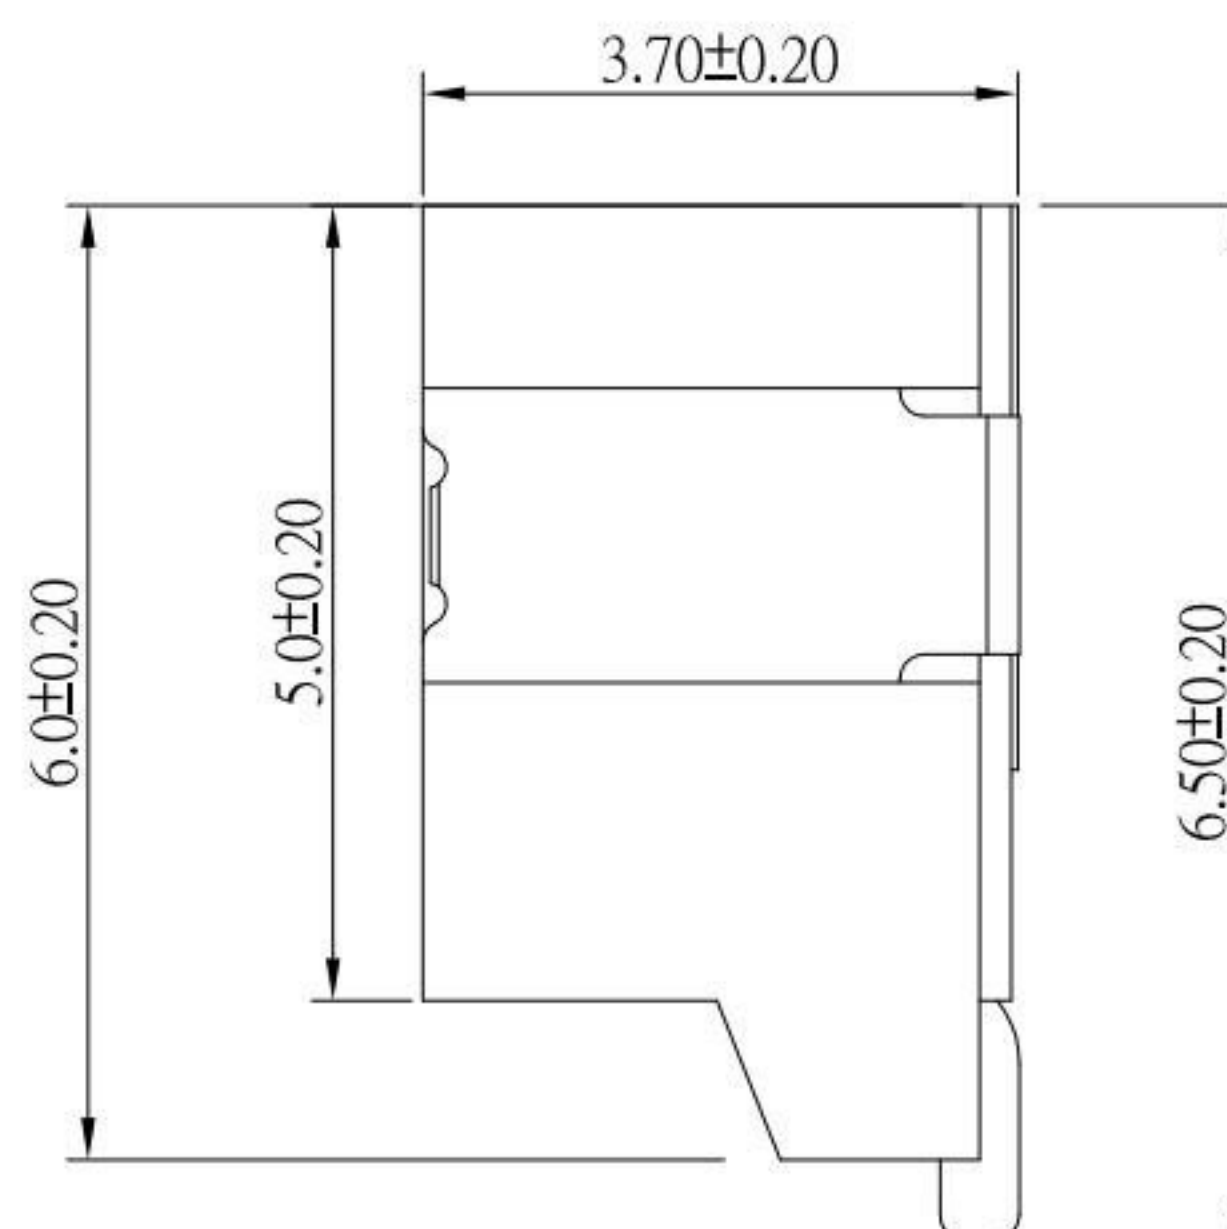


P.C.B LAYOUT MOUNTING PATTERN

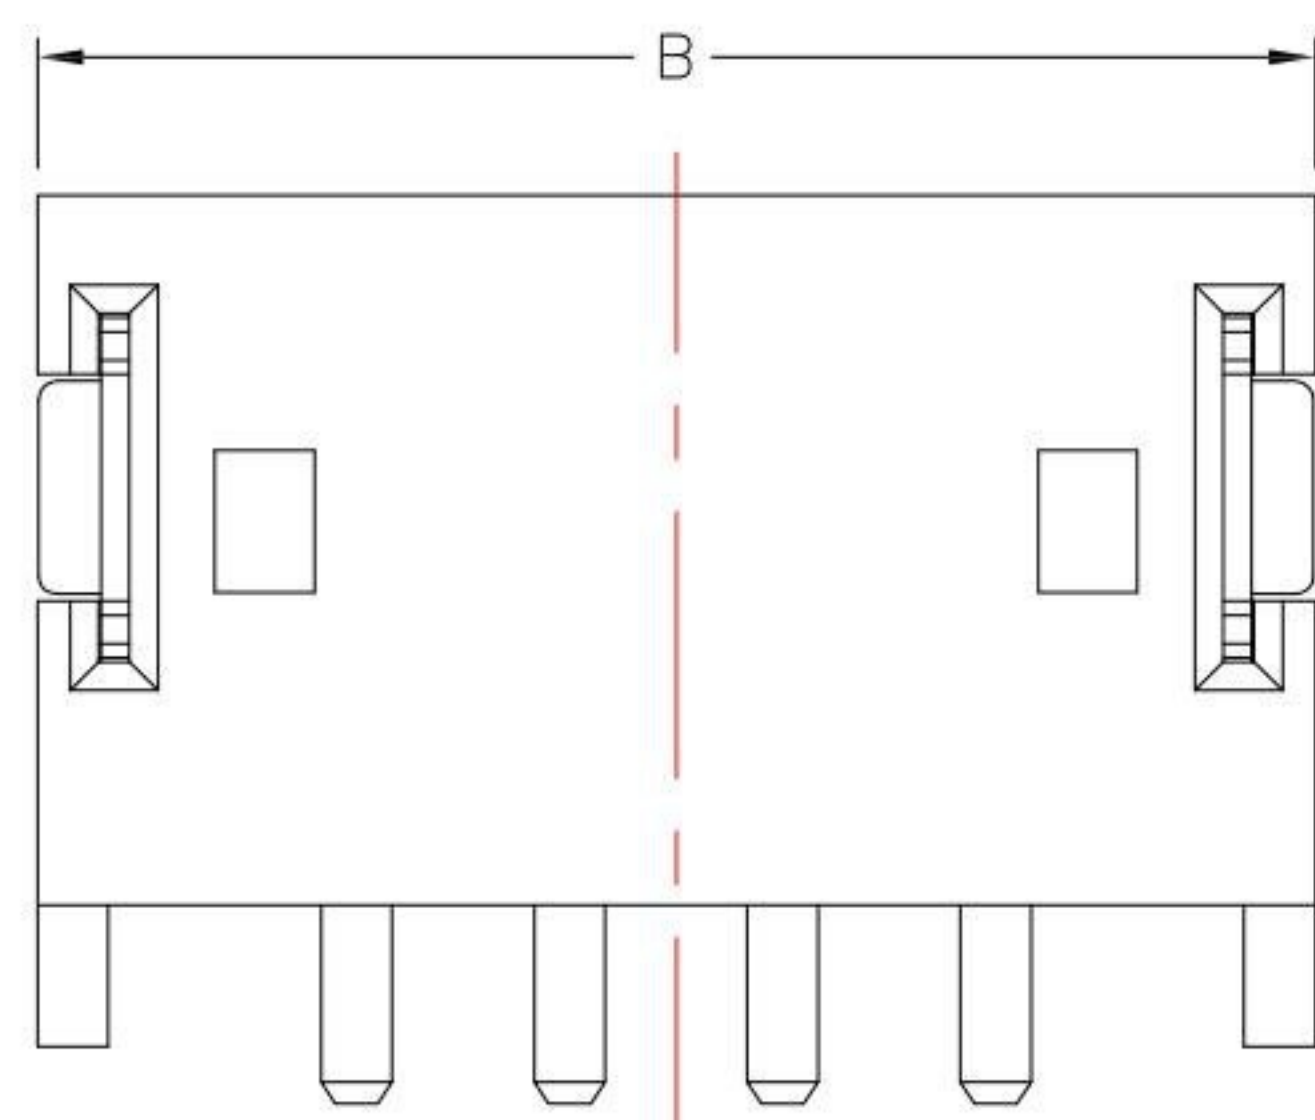

SPECIFICATIONS

- 1.Current rating : 2.0A , AC / DC
- 2.Voltage rating : 100V, AC / DC
- 3.Temperature rating : -25°C ~ +85°C
- 4.Insulation resistance : 500MΩ min.
- 5.Contact resistance : 20mΩ/Max
- 6.Withstand Voltage : 500V AC / minute

Material:

- 1.Housing : LCP
- 2.Contact : Brass,Tin over Nickel
- 3.Leg : Brass,Tin over Nickel

	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
DIM.A	1.50	3.00	4.50	6.00	7.50	9.00	10.50	12.00	13.50	15.00	16.50	18.00	19.50	21.00	22.50
DIM.B	6.00	7.50	9.00	10.50	12.00	13.50	15.00	16.50	18.00	19.50	21.00	22.50	24.00	25.50	27.00
DIM.C	3.60	5.10	6.60	8.10	9.60	11.10	12.60	14.10	15.60	17.10	18.60	20.10	21.60	23.10	24.60

ITEM NO.	DESCRIPTION	DRAWN	DATE
4	更新尺寸	Jack	091421
3	更新Rating及材質	Jack	031721
2	更新樣式及尺寸	Jack	101619
1	更新材質	Jack	080317

KSD 科斯达电子科技有限公司
 SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD
 全球 互聯零組件製造企業

TOLERANCE UNLESS OTHERWISE STATED :
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	09/14/21			
CHECKED BY:	DATE	FINISH	MODLE	WAFER P : 1.50mm 臥式
Jacky Chen	09/14/21			
APPROVED BY:	DATE	SCALE	DWG NO.	WF-1501RSxx34-S304
Tony Kao	09/14/21	1 : 1	PART NO.	WF-1501RSxx34-S304
		SHEET NO.	1 of 1	
				SIZE A4
				VER R4