



4.7±0.2

6.0±0.2

1.6

3.4±0.2

A±0.2

0.5

B

2.0


∅0.8

POLES	DIMENSIONS(mm)	
	A	B
2	6.0	2.0
3	8.0	4.0
4	10.0	6.0
5	12.0	8.0
6	14.0	10.0
7	16.0	12.0
8	18.0	14.0
9	20.0	16.0
10	22.0	18.0
11	24.0	20.0
12	26.0	22.0
13	28.0	24.0
14	30.0	26.0
15	32.0	28.0
16	34.0	30.0

SPECIFICATIONS

Current rating : 2.0A AC , DC
 Voltage rating : 250V AC , DC
 Temperature rating : -25°C ~ +85°C
 Insulation resistance : 1000MΩ min.
 Withstand voltage : 800V AC/minute
 Contact resistance : 10mΩ/Max
 Material:
 Housing : PA66
 Contact : Brass,Tin over Nickel

P.C.B LAYOUT MOUNTING PATTERN

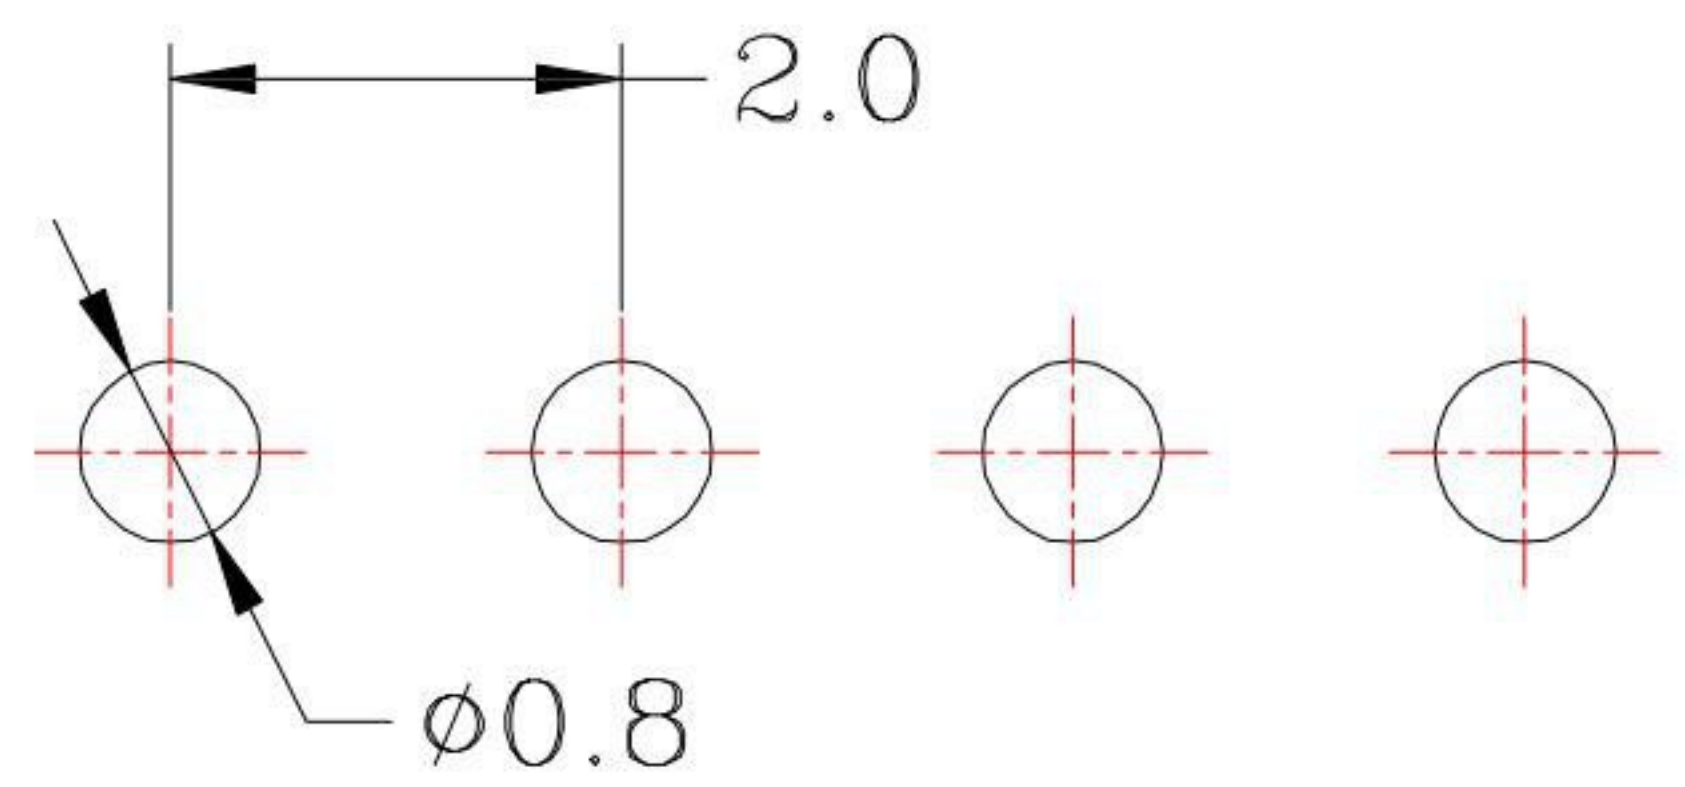

KSD 科斯达电子科技有限公司
 SWITCH CONNECTOR 全球 互联零组件制造企业
KSD ELECTRONIC TECHNOLOGY Co., LTD

TOLERANCE UNLESS OTHERWISE STATED :
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	08/17/20		MODLE	WAFER P : 2.0mm DIP 180度
CHECKED BY:	DATE	FINISH	DWG NO.	WF-2001VDxx-S304
Jacky Chen	08/17/20		PART NO.	WF-2001VDxx-S304
APPROVED BY:	DATE	SCALE	1 of 1	
Tony Kao	08/17/20	SHEET NO.		

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	新增尺寸	Jack	081720
1	更新圖面	Jack	020218