


P.C.B LAYOUT MOUNTING PATTERN

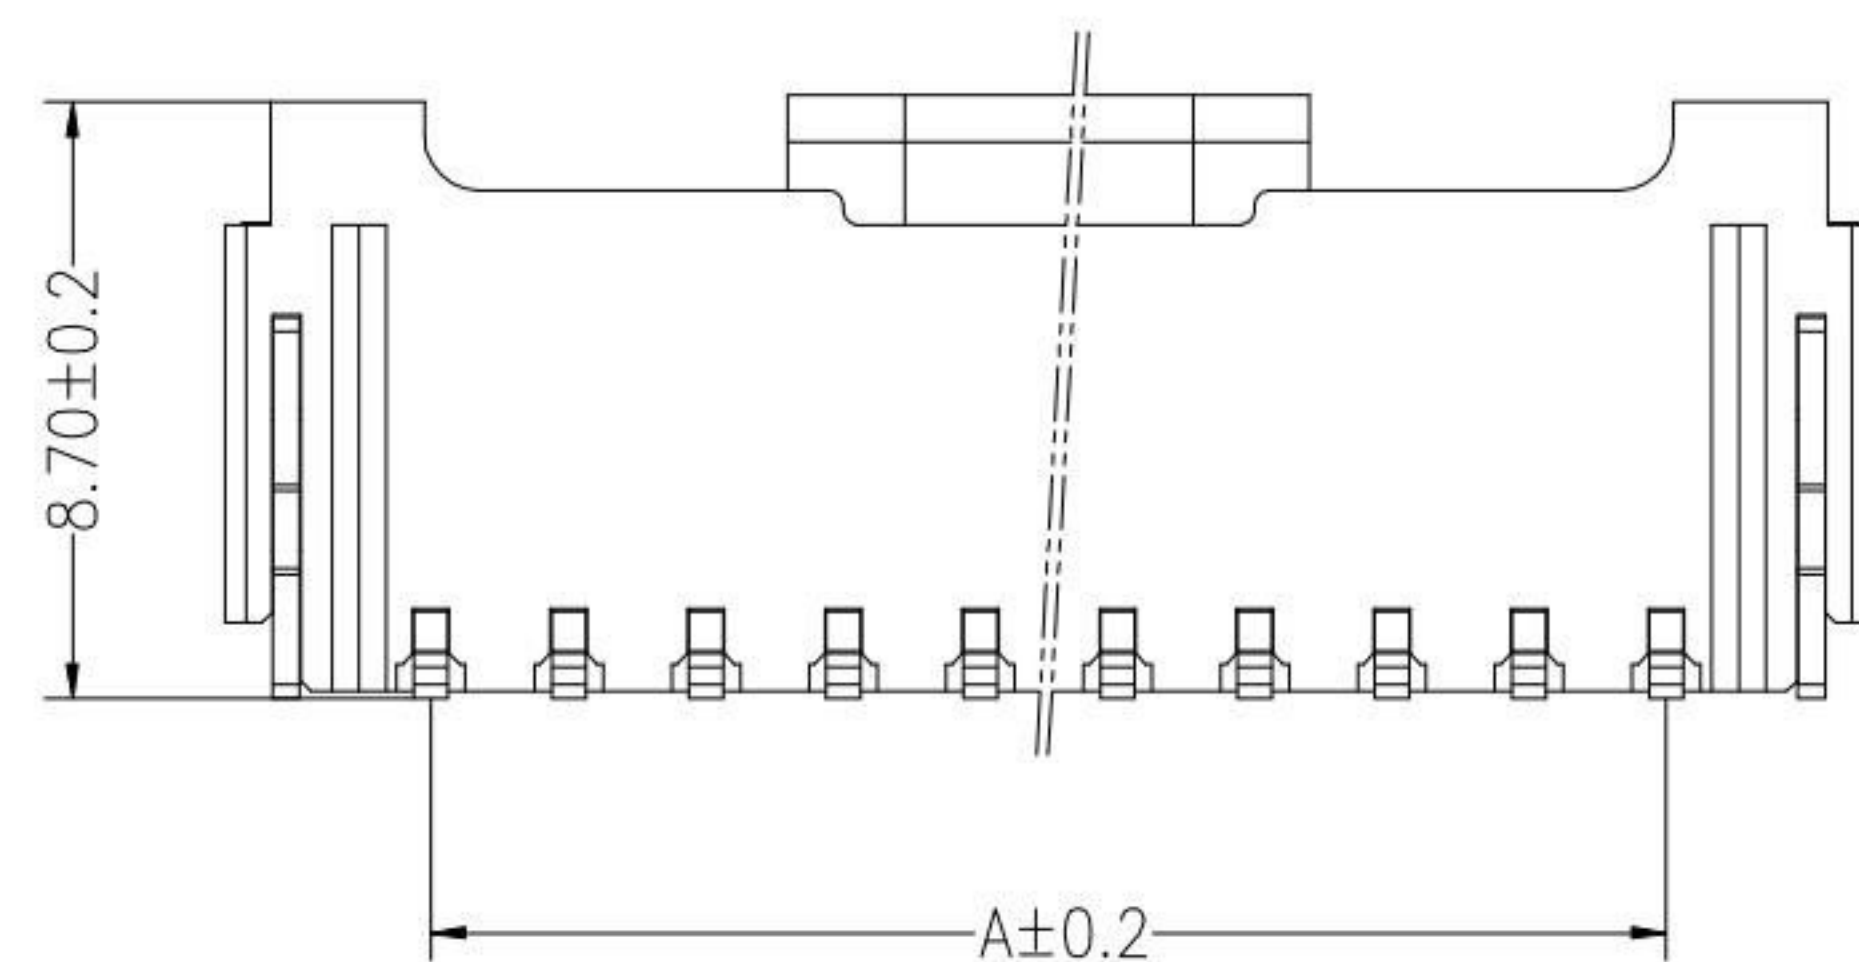

PIN.	DIMA	DIMB	DIMC
02	2.00	8.00	4.55
03	4.00	10.00	6.55
04	6.00	12.00	8.55
05	8.00	14.00	10.55
06	10.00	16.00	12.55
07	12.00	18.00	14.55
08	14.00	20.00	16.55
09	16.00	22.00	18.55
10	18.00	24.00	20.55
11	20.00	26.00	22.55
12	22.00	28.00	24.55
13	24.00	30.00	26.55
14	26.00	32.00	28.55
15	28.00	34.00	30.55


**SPECIFICATIONS**

Current rating : 3.0A AC , DC  
 Voltage rating : 250V AC , DC  
 Temperature rating : -25°C ~ +85°C  
 Insulation resistance : 1,000MΩ min.  
 Withstand voltage : 800V AC/minute  
 Contact resistance : 20mΩ/Max  
 Material:  
 Housing : PA6T  
 PIN : Brass / Tin-Plated  
 SOLDER TABS : Brass / Tin-Plated

**KSD** 科斯达电子科技有限公司  
 SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD  
 全球 互联零组件制造企业

TOLERANCE UNLESS OTHERWISE STATED :  
 Up to 5 ±0.2  
 Above 5 ~ 15 ±0.3  
 Above 15 ~ 30 ±0.4  
 Above 30 ~ 50 ±0.5  
 Angle ±0.3

3RD. ANGEL'S



UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	09/08/20			
CHECKED BY:	DATE	FINISH	MODLE	WAFER P : 2.0mm SMT 180度
Jacky Chen	09/08/20			
APPROVED BY:	DATE	SCALE	DWG NO.	WF-2019VSxx-S304
Tony Kao	09/08/20	1 : 1	PART NO.	WF-2019VSxx-S304
SHEET NO.	1 of 1			

ITEM NO.	DESCRIPTION	DRAWN	DATE