



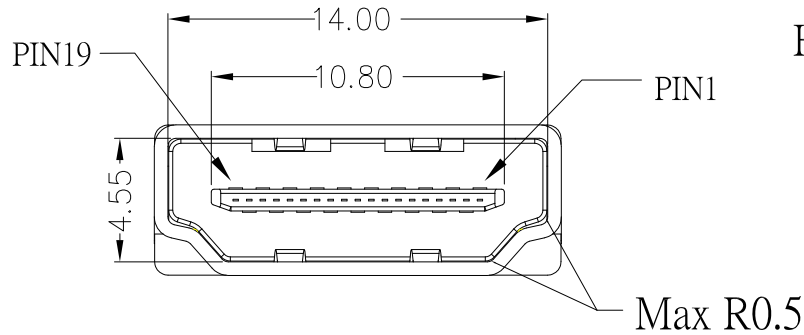

HDMI-19P-VA-x-S297

鍍層厚度:

Blank : 1u"
2 : 15u"
3 : 30u"

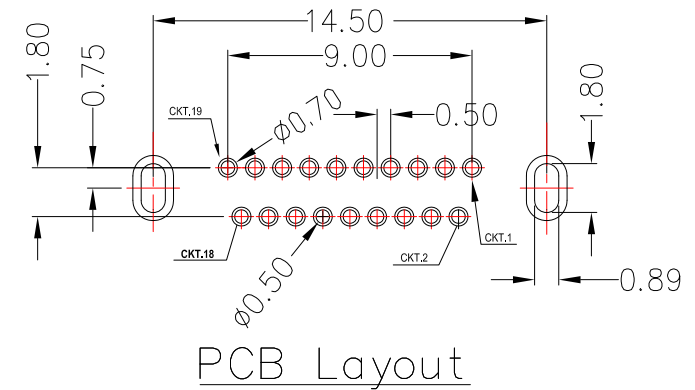

PCB Layout

NOTE:

1.MATERIAL:

1.1 HOUSING:LCP

1.2 CONTACT:BRASS

1.3 SHELL: BRASS

2.PLATING :

2.1 CONTACT: Au PLATING ON THE CONTACT AREA;
TIN PLATING ON THE SOLDER AREA;
NICKEL UNDERPLATING OVERALL;

2.2 SHELL: NICKEL PLATING OVERALL;

3.ELECTRICAL:



3.1 RATING: 0.5A

3.2 DIELECTRIC WITHSTANDING VOLTAGE: AC 500V

3.3 INSULATION RESISTANCE: 100MΩ MIN;

3.4 CONTACT RESISTANCE: 30 mΩ MAX;

3.5 OPERATING TEMPERATURE: -20°C~ 85°C

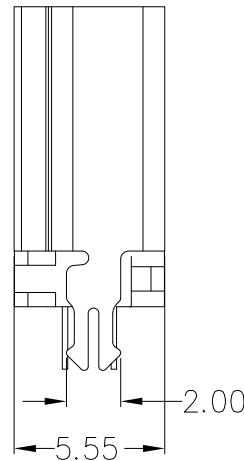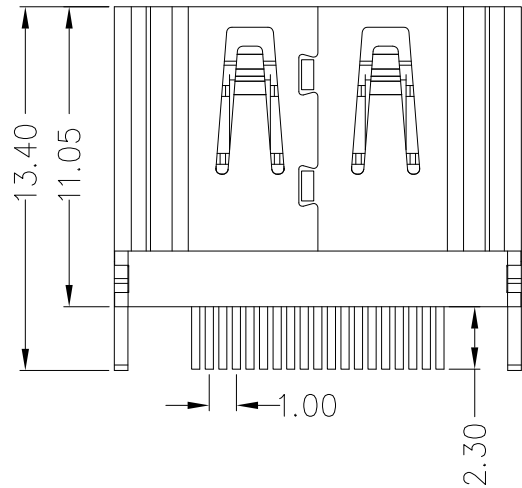

广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 07/21/23
DATE: 07/21/23
DATE: 07/21/23

MAT'L	TITLE	CONNECTOR
FINISH	MODLE	HDMI A TYPE 母座插板式
SCALE	DWG NO.	HDMI-19P-VA-x-S297
SHEET NO.	PART NO.	HDMI-19P-VA-x-S297

SIZE
A4
VER
R1

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新圖面	Jack	072123