
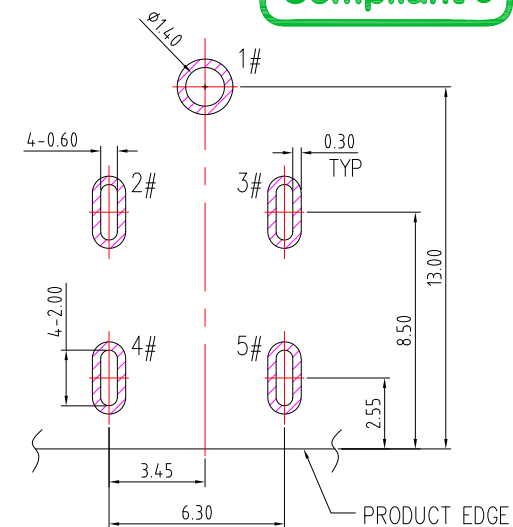


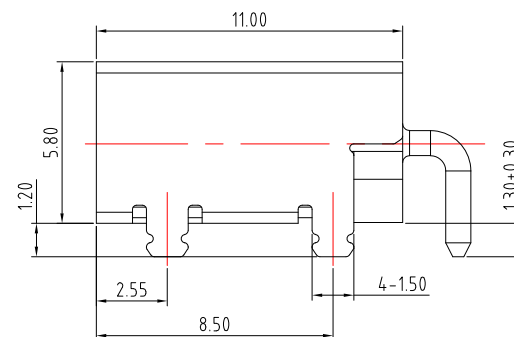

 1# (+)
 2#/3#4#/5# (-)

- 1.Rating : DC 20V, 5.0A
- 2.Contact resistance : $\leq 30\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 5-30N
- 6.life test : 5,000 cycles

DRAWN BY:	DATE	MAT'L		TITLE	JACK	
Jack Lu	08/20/24					
CHECKED BY:	DATE	FINISH		MODLE	DC JACK	
Jacky Chen	08/20/24					
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	DC-D3027EH-1.65-S457	SIZE
						A4
Tony Kao	08/20/24	SHEET NO.	1 of 1	PART NO.	DC-D3027EH-1.65-S457	VER
						RY

2	更新life test	Jack	082024
1	更新尺寸	Jack	080124
ITEM NO.	DESCRIPTION	DRAWN	DATE



广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
Above 30 ~ 50	± 0.5
Angle	± 0.3

3RD.
ANGEL'S



UNITS

MM