


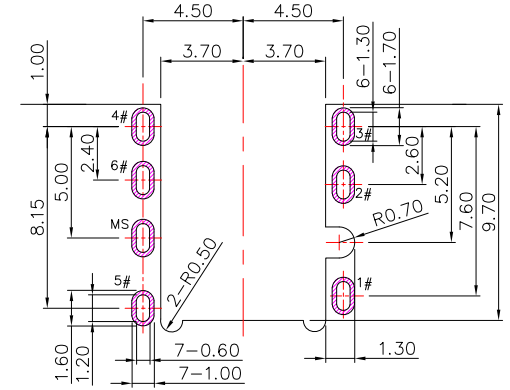
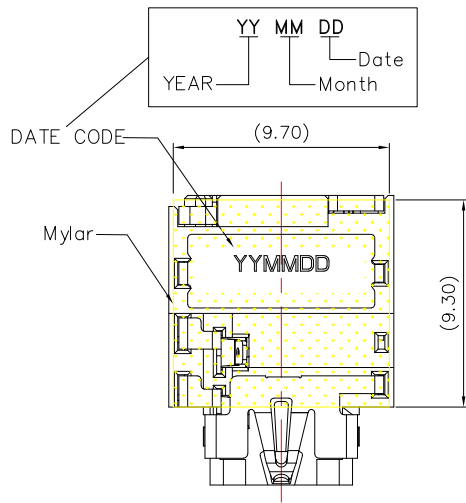
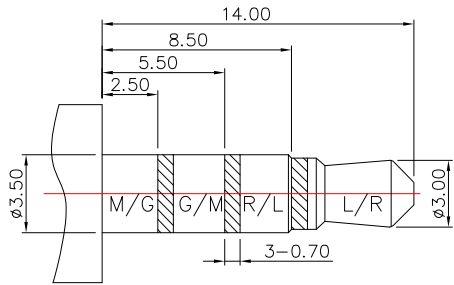
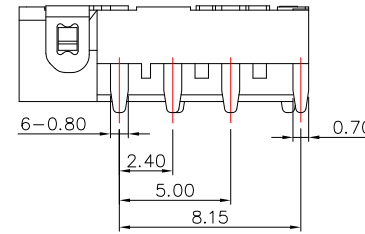



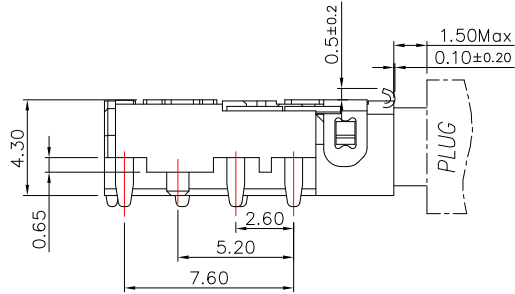

P.C.B LAYOUT



RECOMMENDED PLUG
ø3.5 4-POLE STANDARD PLUG

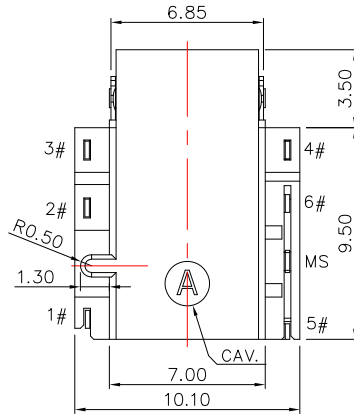

SPECIFICATION

- 1.Rating : DC 30V , 0.5A ;
- 2.Contact resistance : $\leq 50\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 2-30N;
- 6.life test : 5,000 cycles °

K	Mylar	1pcs		
J	Shell	MS 1pcs	SUS	Ni Plated
H	Separator	1pcs	PA10T	BLACK
G	Transfer	5 1pcs	Phosphor Bronze	Au on contact area Gold flash on solder area All over Ni min
F	MAKE terminal	6 1pcs	Phosphor Bronze	
E	TIP Spring	1 1pcs	Phosphor Bronze	
D	Ring B	2 1set	Phosphor Bronze	
C	Ring A	3 1set	Phosphor Bronze	
B	Earth	4 1pcs	Phosphor Bronze	
A	Housing	1pcs	PA10T	BLACK
NO.	DESCRIPTION	QTY	MATERIAL	REMARK



广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao
DATE: 08/29/24

MAT'L		TITLE	JACK
FINISH		MODLE	PHONE JACK
SCALE	1 : 1	DWG NO.	PJ-T52309B-S457
SHEET NO.	1 of 1	PART NO.	PJ-T52309B-S457
		SIZE	A4
		VER	R2