
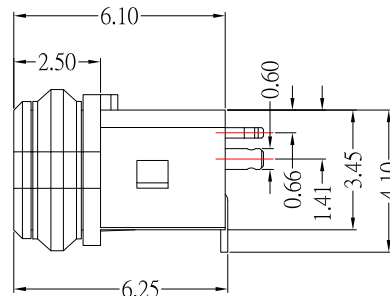
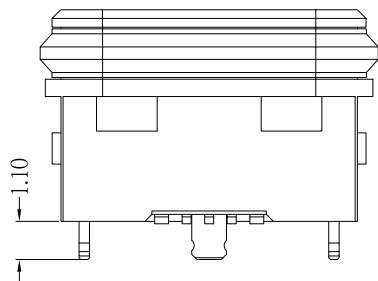
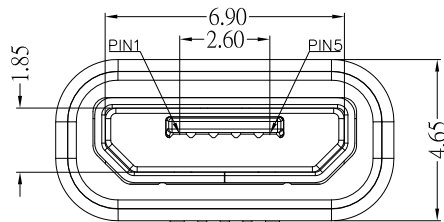




MRUSB-5B-WP21V-x-S347

鍍層厚度：

Blank : 1u"
2 : 15u"
3 : 30u"

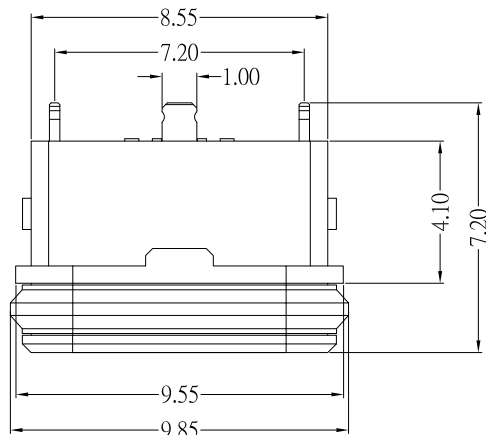

IPX7

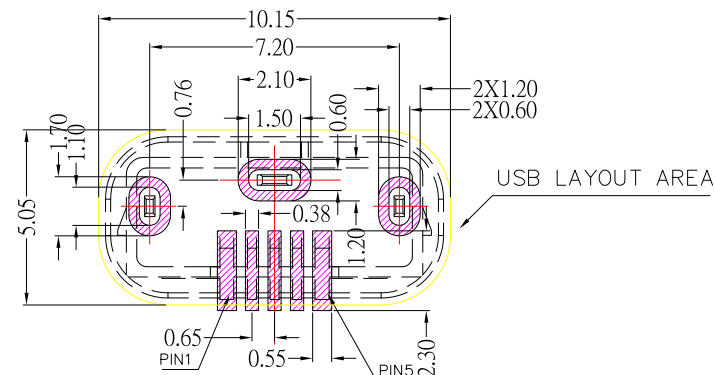

P.C.B LAYOUT

NOTES:

MATERIAL:

1.1 HOUSING: LCP

1.2 CONTACT: PHOSPHOR BRONZE

1.3 SHELL: SUS

FINISH:

2.1 CONTACT: PLATED GOLD IN MATING AREA ;
GOLD PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL

2.2 SHELL: TIN UNDER PLATED SURFACE LAYER

3.SPECIFICATION:

3.1 RATING: 2.0 A(PIN1,5) ; 1.0A(PIN2,3,4) , 30VAC

3.2 DIELECTRIC WITHSSTANDING VOLTAGE: 100 VAC

3.3 CONTACT RESISTANCE: 30 mΩ MAX.

3.4 INSULATION RESISTANCE: 100 MΩ MIN.



广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS
OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao
DATE: 11/30/23
DATE: 11/30/23
DATE: 11/30/23

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	MICRO USB 5PF B TYPE 直立式 防水型 H6.25
SCALE	1 : 1	DWG NO.	MRUSB-5B-WP21V-x-S347
SHEET NO.	1 of 2	PART NO.	MRUSB-5B-WP21V-x-S347

SIZE
A4
VER
R