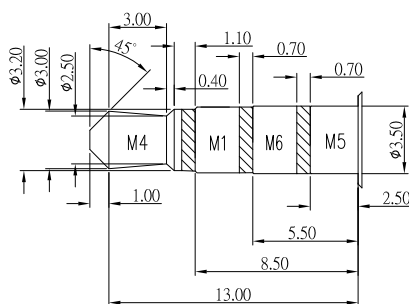
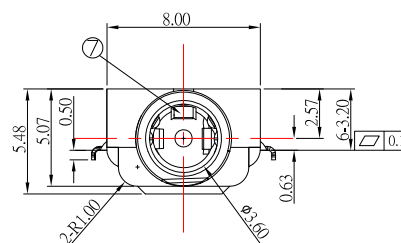
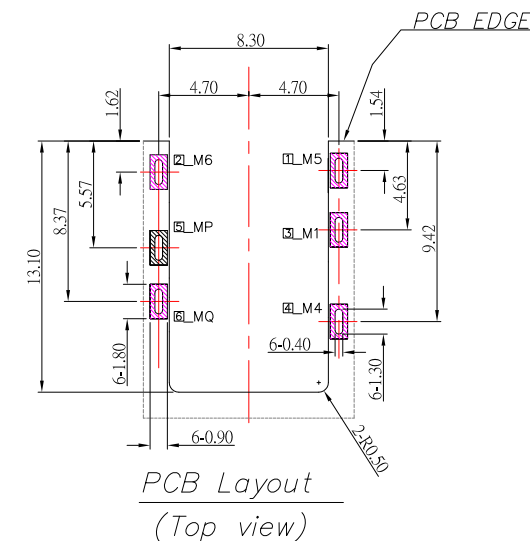
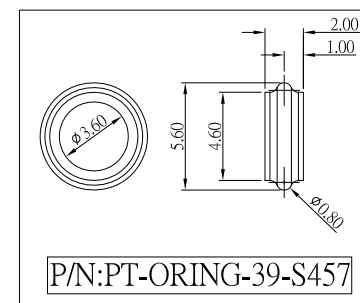


1. Rating: 6V AC ,1.8A
1. Contact resistance : $\leq 50\text{m}\Omega$
2. Insulation resistance : $\geq 100\text{M}\Omega$
3. Withstand voltage : 250VAC
5. Insertion and extraction force : 3-30N
6. life test : 10,000 cycles
7. Waterproof Lever: IP67

⑨	P2_HOUSING	PA-9T, BLACK		1
⑧	P1_HOUSING	PA-9T, BLACK		1
⑦	M4F_ASSIST PIN	Stainless Steel		1
⑥	M5_GND-CONTACT	PHOSPHOR BRONZE		1
⑤	M6_R2-CONTACT	PHOSPHOR BRONZE		1
④	M4_TIP-CONTACT	Titanium Copper Alloy	Au Plated	1
③	MQ_ON CONTACT	PHOSPHOR BRONZE		1
②	MP_OS CONTACT	PHOSPHOR BRONZE		1
①	M1_R-CONTACT	PHOSPHOR BRONZE		1
ITEM DESCRIPTIONs		MATERIAL	FINISH	QTY


 广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2	3RD. ANGEL'S		UNITS	MM
	Above 5 ~ 15	± 0.3				
	Above 15 ~ 30	± 0.4				
	Above 30 ~ 50	± 0.5				
	Angle	± 0.3°				


ITEM	DESCRIPTIONS	MATERIAL		FINISH	QTY
DRAWN BY: Jack Lu	DATE 12/19/23	MAT'L		TITLE JACK	
CHECKED BY: Jacksy Chen	DATE 12/19/23	FINISH		MODLE 3.5mm PHONE JACK 防水型	
		SCALE	1 : 1	DWG NO. PJ-WP32390A-S457	SIZE A4
APPROVED BY: Tony Kao	DATE 12/19/23	SHEET NO.	1 of 1	PART NO. PJ-WP32390A-S457	VER R

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------


IP67

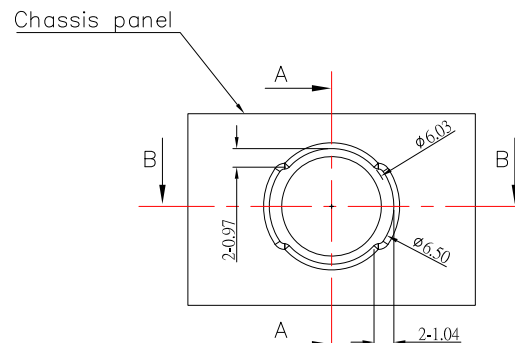


Recommended seal




A-A SECTION

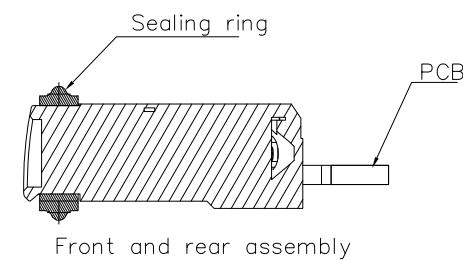


Front and rear assembly



B-B SECTION



Dimensions after
O-ring assembly

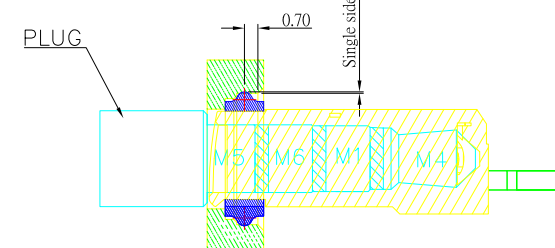

Schematic diagram of male
and female head pointing



广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:
Jack Lu
CHECKED BY:
Jacky Chen
APPROVED BY:
Tony Kao

DATE
12/19/23
DATE
12/19/23
DATE
12/19/23

MATL
FINISH
SCALE
SHEET NO.

1 : 1
1 of 1

TITLE
MODLE
DWG NO.
PART NO.

JACK
3.5mm PHONE JACK 防水型
PJ-WP32390A-S457
PJ-WP32390A-S457

SIZE
A4
VER
R