
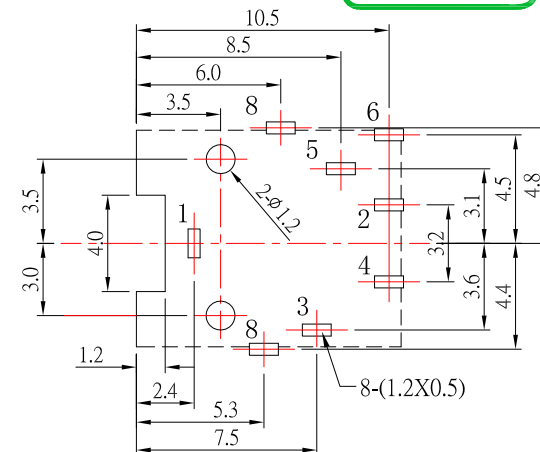
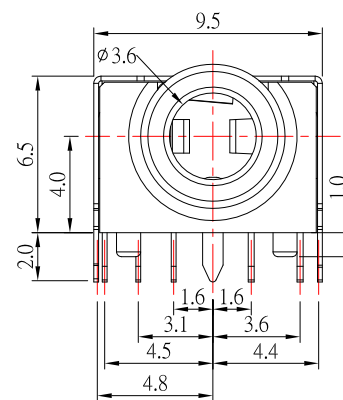
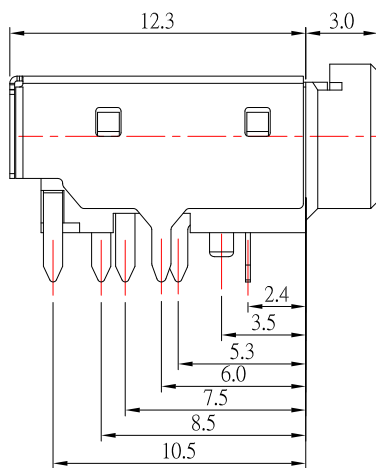
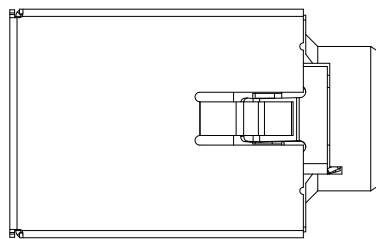


PJ-D30353FS-x-S457



Blank	Black
PI	Pink
GR	Green



P.C.B LAYOUT
TOP VIEW

SPECIFICATION

- Rating : DC 30V, 0.5A ;
- Contact resistance : $\leq 30m\Omega$;
- Insulation resistance : $\geq 100M\Omega$;
- Withstand voltage : 500VAC ;
- Insertion and extraction force : 3-30N;
- life test : 5,000 cycles °

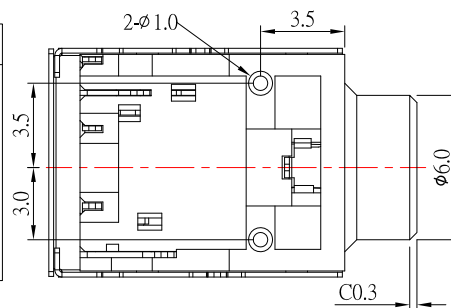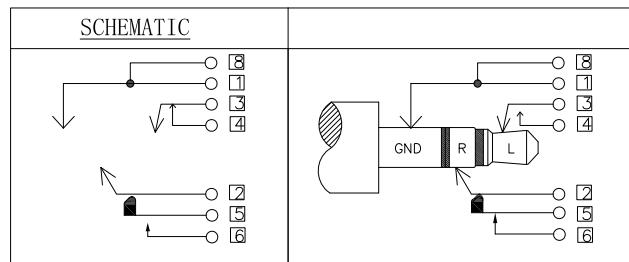

8	SHELL	1	SUS	Ni Plating
7	HOUSING	1	PA9T	
6	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn Plated over Ni
5	SPRING PIECE	1	PHOSPHOR BRONZE	Sn Plated over Ni
4	CURVE PIECE	1	PHOSPHOR BRONZE	Sn Plated over Ni
3	SPRING PIECE	1	PHOSPHOR BRONZE	Sn Plated over Ni
2	SPRING PIECE	1	PHOSPHOR BRONZE	Sn Plated over Ni
1	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn Plated over Ni
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
09/19/23
DATE
09/19/23
DATE
09/19/23

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

JACK
PHONE JACK
PJ-D30353FS-x-S457
PJ-D30353FS-x-S457

SIZE
A4
VER
R