



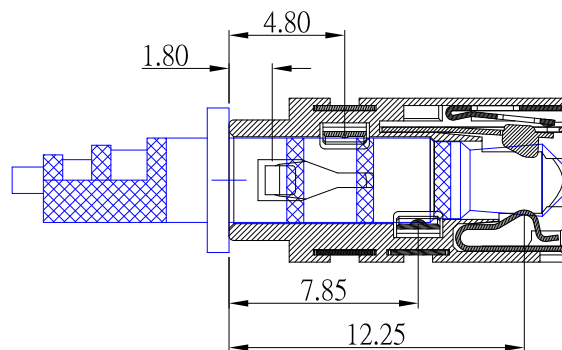


Technical drawing of a mechanical part with dimensions and labels. The drawing shows a cross-section of a component with a central cavity. Key dimensions include a total width of 11.10, a central cavity width of 5.20, and a total height of 8.40. A central horizontal dashed line indicates the axis of symmetry. Labels 1 through 6 identify specific features: 1 and 2 are small vertical pins or screws; 3 is a larger vertical pin or screw; 4 is a small rectangular feature; 5 and 6 are small rectangular features. A dimension of 2.50 is shown for the distance from the left edge to the first pin, and 2.30 is shown for the distance between the first and second pins. A dimension of 6-0.80 is shown for the distance from the second pin to the right edge. A dimension of 2.15 is shown for the distance from the left edge to the bottom edge. A dimension of 9.10 is shown for the distance from the bottom edge to the right edge. A dimension of 5.00 is shown for the distance from the top edge to the bottom edge. A dimension of 2.50 is shown for the distance from the left edge to the first pin, and 2.30 is shown for the distance between the first and second pins. A dimension of 6-0.80 is shown for the distance from the second pin to the right edge. A dimension of 2.15 is shown for the distance from the left edge to the bottom edge. A dimension of 9.10 is shown for the distance from the bottom edge to the right edge. A dimension of 5.00 is shown for the distance from the top edge to the bottom edge.

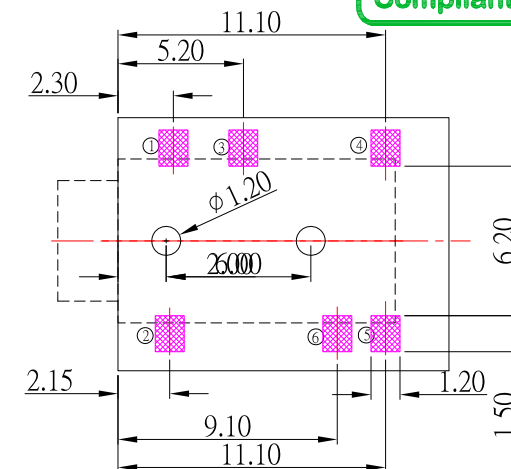

Technical drawing of a circular mechanical part. The drawing shows a cross-section with the following dimensions:

- Outer diameter: 6.80
- Inner diameter: 4.25
- Hole diameter: $\varnothing 3.60$
- Hole offset from the center: 2.25

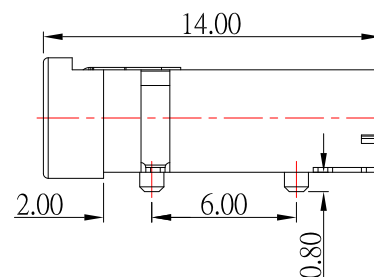

- 1.Rating : DC 5.0V , 0.5A ;
- 2.Contact resistance : $\leq 70\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °



TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2
	Above 5 ~ 15	± 0.3
	Above 15 ~ 30	± 0.4
	Above 30 ~ 50	± 0.5
	Angle	± 0.3

MM

DATE _____

DI S2	
-------	--

	R
--	---