

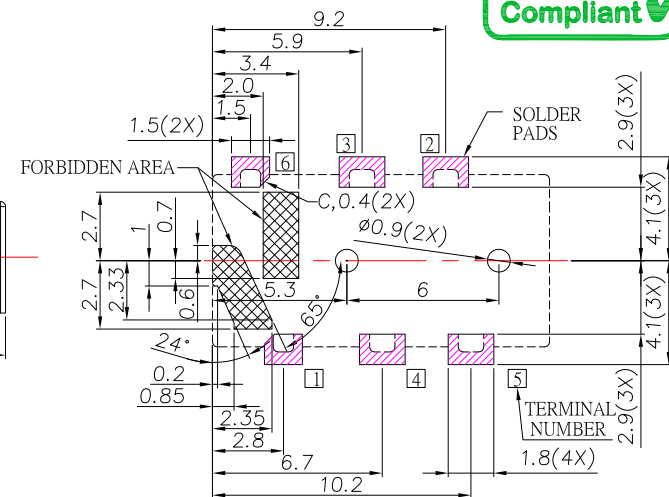


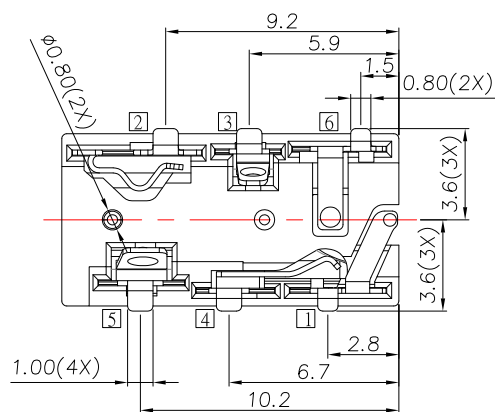

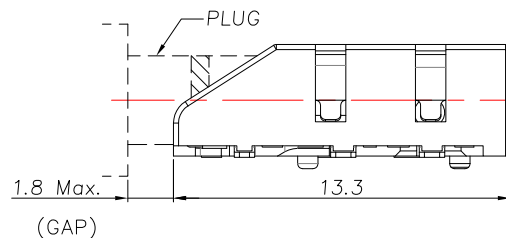




SPECIFICATION

- Rating : DC 12V 1.0A
- Contact resistance: $\leq 50\text{m}\Omega$
- Insulation resistance: $\geq 100\text{M}\Omega$
- Withstand voltage: 500VAC
- Insertion and extraction force: 3-30N
- life test: 5,000 cycles

⑦	Terminal 6	⑥	1	Phosphor Bronze	Gold flash on contact area, gold flash plated on solder tail Area, all over nickel plated
⑥	Terminal 5	⑤	1	Phosphor Bronze	
⑤	Terminal 4	④	1	Phosphor Bronze	
④	Terminal 3	③	1	Phosphor Bronze	
③	Terminal 2	②	1	Phosphor Bronze	
②	Terminal 1	①	1	Phosphor Bronze	Black
①	Housing		1	PA10T	
NO.	DESCRIPTION	QTY	MATERIAL		REMARK

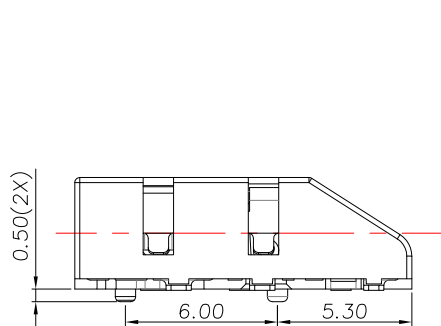

广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD. ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 07/10/23
DATE: 07/10/23
DATE: 07/10/23

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO. 1 of 1

TITLE: JACK
MODLE: PHONE JACK
DWG NO. PJ-5416D-S458
PART NO. PJ-5416D-S458

SIZE: A4
VER: R