


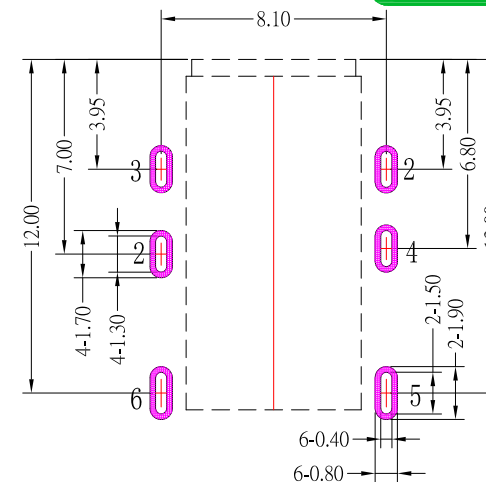
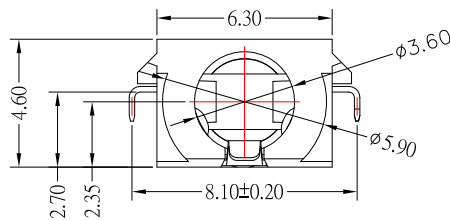
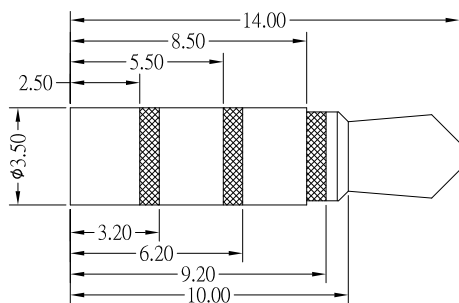
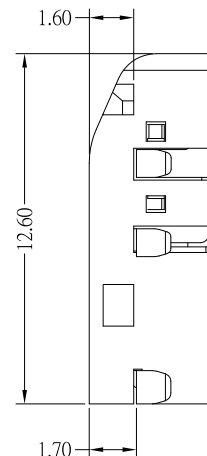


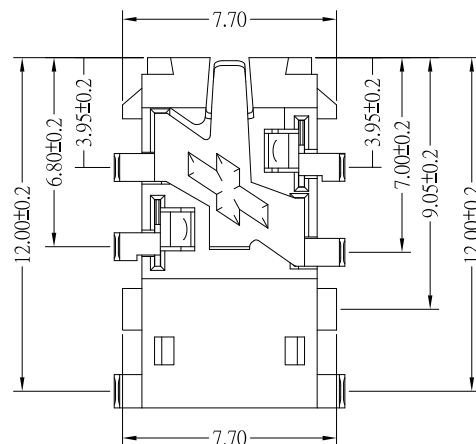

P.C.B LAYOUT
TOP VIEW

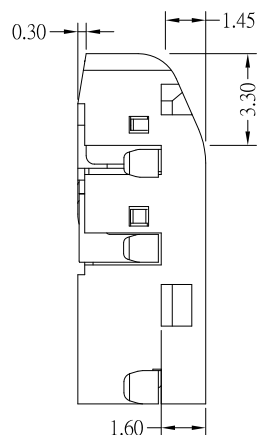

SCHEMATIC



SPECIFICATIONS

- 1.Rating : DC 30V , 0.5A
- 2.Contact resistance : $\leq 30\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

6	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
5	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
4	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
3	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
2	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
1	HOUSING	1	PPA (Black)	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS
OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MATL	TITLE	JACK
Jack Lu	04/25/23			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	04/25/23			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-S32304A-S457
Tony Kao	04/25/23	1 : 1		
		SHEET NO.	PART NO.	PJ-S32304A-S457
		1 of 1		
				SIZE A4
				VER R

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------