
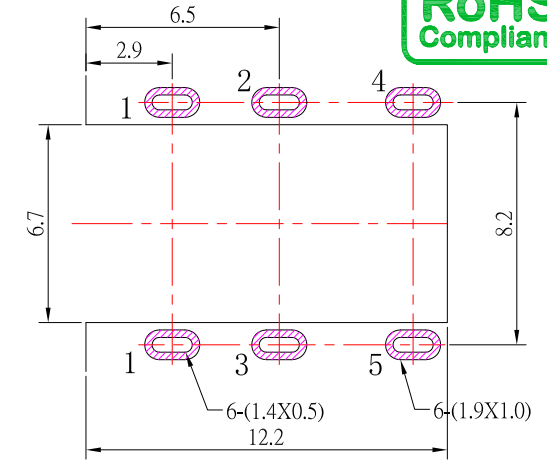
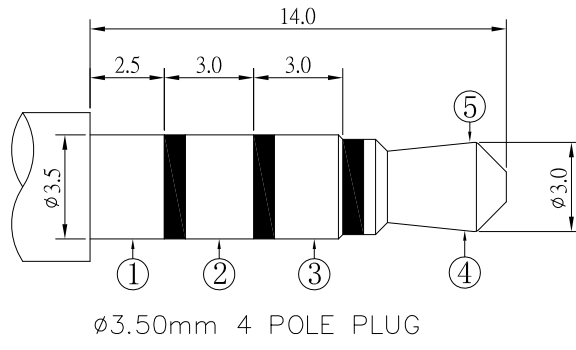
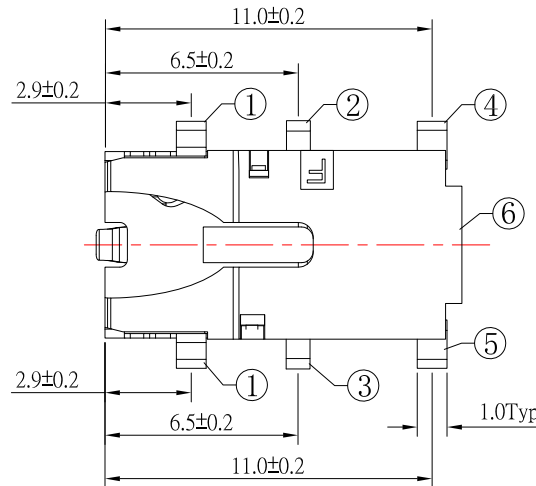
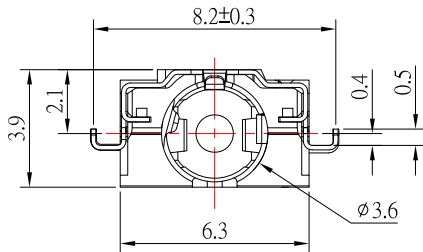
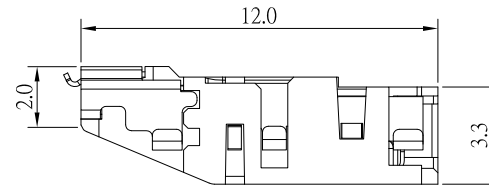


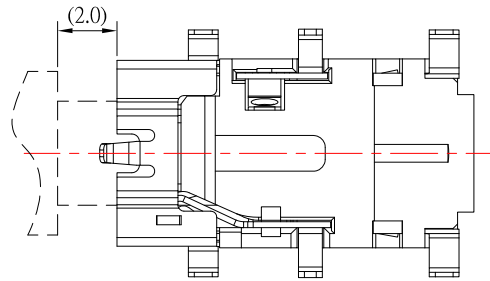


P.C.B LAYOUT
TOP VIEW

SPECIFICATION

- 1.Rating : DC 30V, 1.0A
- 2.Contact resistance : $\leq 30\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

SCHEMATIC



6	HOUSING	1	PA9T	
5	5# CONTACT FOOT	1	SUS	Au-Plating
4	4# CONTACT FOOT	1	SUS	Au-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
1	1# CONTACT FOOT	1	SUS	Au-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
DRAWN BY: Jack Lu		DATE: 11/03/23	MAT'L:	TITLE: PHONE JACK
CHECKED BY: Jacky Chen		DATE: 11/03/23	FINISH:	MODLE: PJ-S3246-S124
APPROVED BY: Tony Kao		DATE: 11/03/23	SCALE: 1 : 1	DWG NO. PJ-S3246-S124
			SHEET NO. 1 of 1	PART NO. PJ-S3246-S124
				SIZE: A4
				VER: R1

 **广东科斯达电子科技有限公司**
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S

UNITS MM

1	新增 P.C.B LAYOUT 尺寸	Jack	110323
ITEM NO.	DESCRIPTION	DRAWN	DATE