

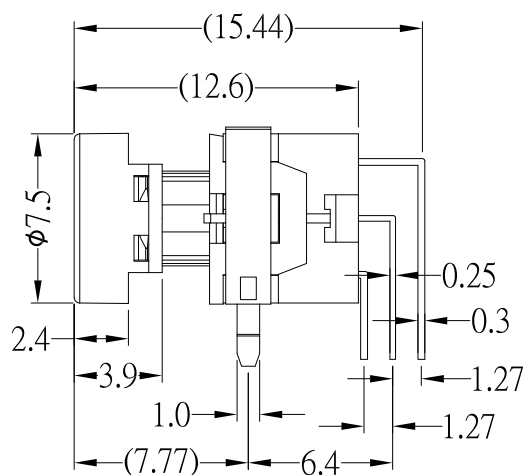


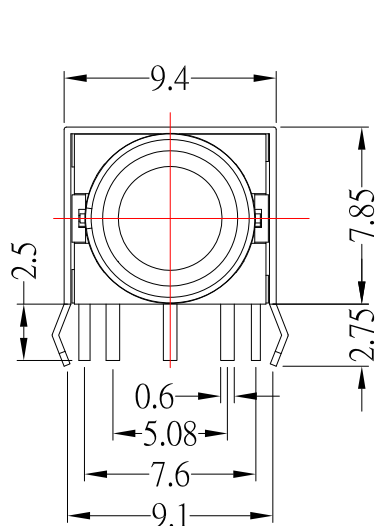

PS-x-22E85x-S313

COLOR OF LED			
0	Without	1	Red
2	Green	3	Orange
4	Yellow	7	Blue
8	White		


BLANK	Lock
NL	Non-Lock

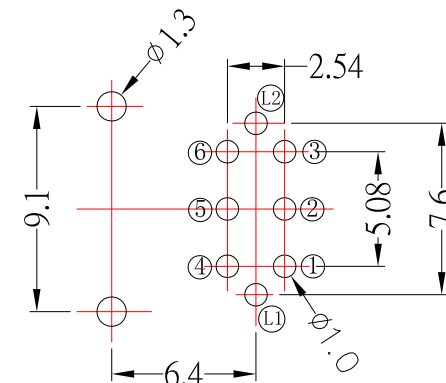


P.C.B LAYOUT
TOP VIEW

SPECIFICATIONS:

- 1.RATTING: 12V DC , 0.1A
- 2.CONTACT RESISTANCE: 70mΩ Max
- 3.INSULATION RESISTANCE: 100MΩ Min
- 4.OPERATING FORCE: 250±100 gf
- 5.OPERATING LIFE:10,000 Cycles



CIRCUIT DIAGRAM

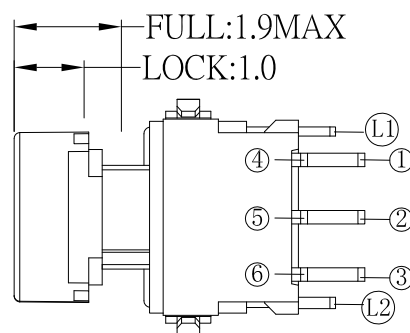

9	LED	1		
8	CAP	1	PC(Slave)	
7	KNOB	1	POM(White)/NYLON66(Black)	
6	COVER	1	NYLON66(Black)	
5	LOCK PIN	1	SUS	
4	CONTACT	2	PHOSPHOR BRONZE	
3	SPRING	1	SUS	Ag plated
2	CASE	1	NYLON66(Black)	
1	TERMINAL	6	BRASS	Ag plated over Ni
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 12/08/23
DATE: 12/08/23
DATE: 12/08/23

MAT'L	TITLE	SWITCH
FINISH	MODLE	PUSH W/I LED
SCALE	DWG NO.	PS-x-22E85x-S313
SHEET NO.	PART NO.	PS-x-22E85x-S313
SIZE	VER	R3