
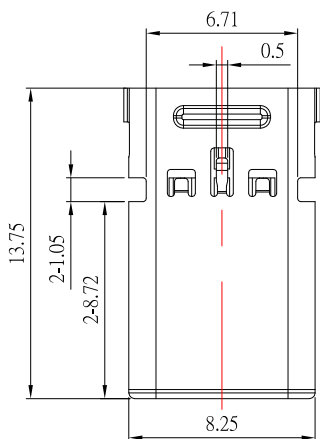
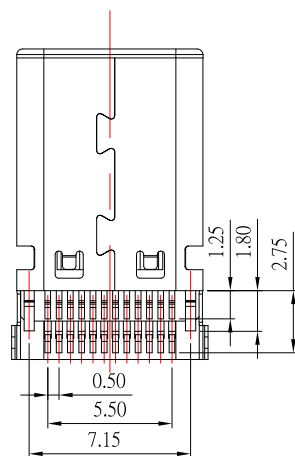
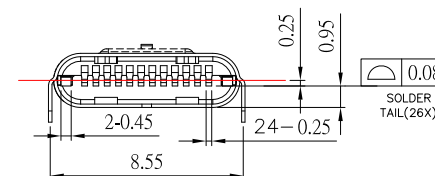
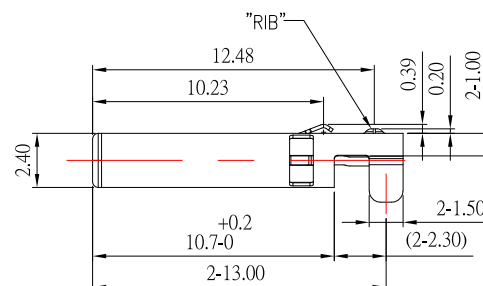


— 鍍層厚度：

3 : 30u"

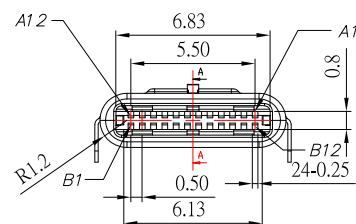

P _{in} Number		P _{in} Number	
PIN A1	GND	PIN B12	GND
PIN A2	TX1+	PIN B11	RX1+
PIN A3	TX1-	PIN B10	RX1-
PIN A4	VBUS	PIN B9	VBUS
PIN A5	CC	PIN B8	SBU2
PIN A6	D+	PIN B7	D-
PIN A7	D-	PIN B6	D+
PIN A8	SBU1	PIN B5	VCONN
PIN A9	VBUS	PIN B4	VBUS
PIN A10	RX2-	PIN B3	TX2-
PIN A11	RX2+	PIN B2	TX2+
PIN A12	GND	PIN B1	GND

				 广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DRAWN BY: DATE		MAT'L		TITLE	CONNECTOR					
					Jack Lu10/08/24										
					CHECKED BY: DATE	FINISH		MODLE	USB TYPE C Male USB4 GEN2 20G 沉板 端子SMT 外壳DIP TYPE						
					Jacky Chen10/08/24					SCALE	1 : 1	DWG NO.	SBC-241PLM8-43x-S242	SIZE A4	
1	更新料號	Jack	100824	TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ± 0.2 Above 5 ~ 15 ± 0.3 Above 15 ~ 30 ± 0.4 Above 30 ~ 50 ± 0.5 Angle ± 0.3	3RD. ANGEL'S		UNITS	MM	APPROVED BY: DATE	SHEET NO.	1 of 1	PART NO.	SBC-241PLM8-43x-S242	VER R1
ITEM NO.	DESCRIPTION	DRAWN	DATE							Tony Kao10/08/24					