
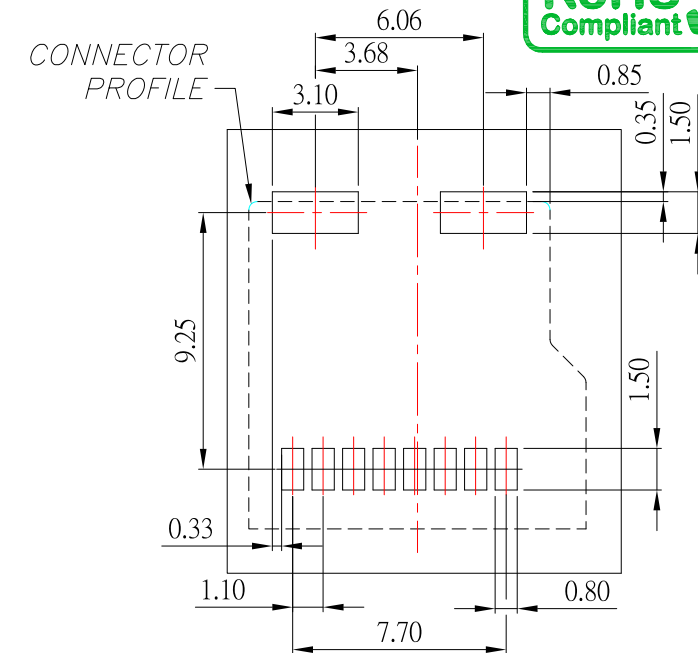
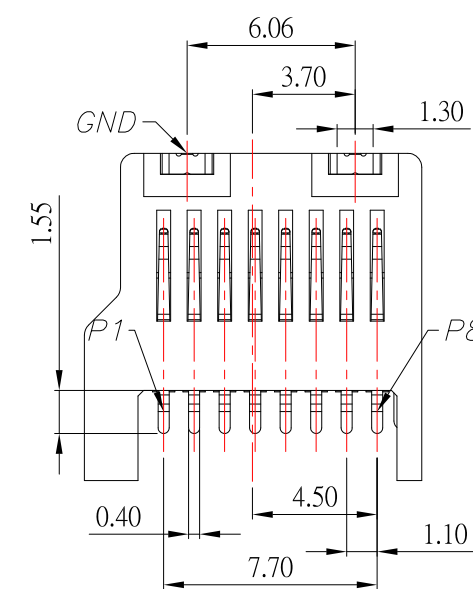
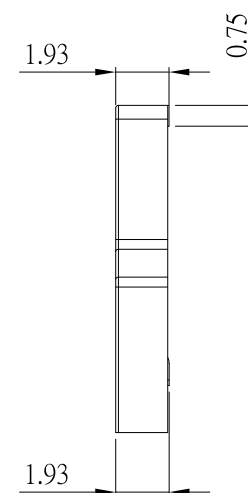


Pin No.	NAME	TYPE	DESCRIPTION
1	DAT 2	I/O/PP	Date Line(bit2)
2	CD/DAT 3	I/O/PP	Card Detect/Date Line(bit3)
3	CMD	PP	Command Response
4	VDD	S	Supply Voltage
5	CLK	I	Colck
6	VSS	S	Supply Voltage Ground
7	DAT0	I/O/PP	Date Line(bit0)
8	DAT1	I/O/PP	Date Line(bit1)

SPECIFICATION

- Electrical :
- 1.Current Rating: 0.5A
 - 2.Voltage Rating: 50V
 - 3.Contact Resistance: 50 mΩ Max.
 - 4.Insulation Resistance: 500 MΩ Min.
- Environmental:
- 1.Operating Temperature: -20℃ ~ +60℃.
- Material:
- 1.Housing: LCP,UL 94V-0
 - 2.Contact: Copper Aalloy
 - 3.Ground: Stainless Steel
- Finish:
- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
 - 2.Ground: Tin Plated on Solder Balls ;
Nickel under plated overall

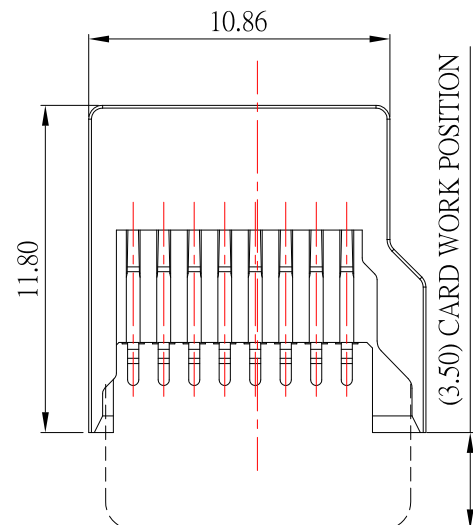

广东科斯达电子科技有限公司

GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2	3RD. ANGEL'S	UNITS	MM
	Above 5 ~ 15 ±0.3			
	Above 15 ~ 30 ±0.4			
	Above 30 ~ 50 ±0.5			
	Angle ±0.3°			

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	11/24/21			
CHECKED BY:	DATE	FINISH	MODLE	MICRO SD 卡座全塑
Jacky Chen	11/24/21			
APPROVED BY:	DATE	SCALE	DWG NO.	SD-TF1308S-S267
Tony Kao	11/24/21	1 : 1		
		SHEET NO.	PART NO.	SD-TF1308S-S267
		1 of 1		

ITEM NO.	DESCRIPTION	DRAWN	DATE
3	更新料號	Jack	112421
2	更新料號	Jack	112321
1	更新尺寸標示	Jack	080218